

---

# **openforcefield Documentation**

*Release 0.8.0*

**Open Force Field Consortium**

Oct 23, 2020



## CONTENTS

<b>1</b>	<b>User Guide</b>	<b>3</b>
<b>2</b>	<b>API documentation</b>	<b>61</b>
	<b>Index</b>	<b>495</b>



A modern, extensible library for molecular mechanics force field science from the [Open Force Field Initiative](#)



## 1.1 Installation

### 1.1.1 Installing via *conda*

The simplest way to install the Open Forcefield Toolkit is via the [conda](#) package manager. Packages are provided on the [omnia Anaconda Cloud channel](#) for Linux, OS X, and Win platforms. The [openforcefield Anaconda Cloud page](#) has useful instructions and [download statistics](#).

If you are using the [anaconda](#) scientific Python distribution, you already have the conda package manager installed. If not, the quickest way to get started is to install the [miniconda](#) distribution, a lightweight minimal installation of Anaconda Python.

On linux, you can install the Python 3 version into `$HOME/miniconda3` with (on bash systems):

```
$ wget https://repo.anaconda.com/miniconda/Miniconda3-latest-Linux-x86_64.sh
$ bash ./Miniconda3-latest-Linux-x86_64.sh -b -p $HOME/miniconda3
$ source ~/miniconda3/etc/profile.d/conda.sh
$ conda activate base
```

On osx, you want to use the osx binary

```
$ curl https://repo.anaconda.com/miniconda/Miniconda3-latest-MacOSX-x86_64.sh -O
$ bash ./Miniconda3-latest-MacOSX-x86_64.sh -b -p $HOME/miniconda3
$ source ~/miniconda3/etc/profile.d/conda.sh
$ conda activate base
```

You may want to add the new `source ~/miniconda3/etc/profile.d/conda.sh` line to your `~/.bashrc` file to ensure Anaconda Python can be enabled in subsequent terminal sessions. `conda activate base` will need to be run in each subsequent terminal session to return to the environment where the toolkit will be installed.

Note that openforcefield will be installed into this local Python installation, so that you will not need to worry about disrupting existing Python installations.

---

**Note:** Installation via the conda package manager is the preferred method since all dependencies are automatically fetched and installed for you.

---

### 1.1.2 Required dependencies

The openforcefield toolkit makes use of the [Omnia](#) and [Conda Forge](#) free and open source community package repositories:

```
$ conda config --add channels omnia --add channels conda-forge
$ conda update --all
```

This only needs to be done once.

---

**Note:** If automation is required, provide the `--yes` argument to `conda update` and `conda install` commands. More information on the conda command-line API can be found in the [conda online documentation](#).

---

### Release build

You can install the latest stable release build of openforcefield via the conda package with

```
$ conda config --add channels omnia --add channels conda-forge
$ conda install openforcefield
```

This version is recommended for all users not actively developing new forcefield parameterization algorithms.

---

**Note:** The conda package manager will install dependencies from binary packages automatically, including difficult-to-install packages such as OpenMM, numpy, and scipy. This is really the easiest way to get started.

---

### Upgrading your installation

To update an earlier conda installation of openforcefield to the latest release version, you can use conda update:

```
$ conda update openforcefield
```



## Optional dependencies

This toolkit can optionally make use of the [OpenEye toolkit](#) if the user has a license key installed. Academic laboratories intending to release results into the public domain can [obtain a free license key](#), while other users (including academics intending to use the software for purposes of generating protected intellectual property) must [pay to obtain a license](#).

To install the OpenEye toolkits (provided you have a valid license file):

```
$ conda install --yes -c openeye openeye-toolkits
```

No essential openforcefield release capabilities *require* the OpenEye toolkit, but the Open Force Field developers make use of it in parameterizing new open source force fields. It is known that there are certain differences in toolkit behavior between RDKit and OpenEye when reading a small fraction of molecules, and we encourage you to report any unexpected behavior that may be caused by toolkit differences to our [issue tracker](#).

### 1.1.3 Alternative method: Single-file installer

As of release 0.4.1, single-file installers are available for each Open Force Field Toolkit release. These are provided primarily for users who do not have access to the Anaconda cloud for installing packages. These installers have few requirements beyond a Linux or OSX operating system and will, in one command, produce a functional Python executable containing the Open Force Field Toolkit, as well as all required dependencies. The installers are very similar to the widely-used Miniconda \*.sh files. Accordingly, installation using the “single-file installer” does not require root access.

The installers are between 200 and 300 MB each, and can be downloaded from the “Assets” section of the Toolkit’s [GitHub Releases page](#). They are generated using a [workflow leveraging the “conda constructor” utility](#).

Please report any installer difficulties to the [OFF Toolkit Issue tracker](#), as we hope to make this a major distribution channel for the toolkit moving forward.

## Installation

Download the appropriate installer (openforcefield-<X.Y.Z>-py37-<your platform>-x86\_64.sh) from the [“Assets” section at the bottom of the desired release](#). Then, install the toolkit with the following command:

```
$ bash openforcefield-<X.Y.Z>-py37-<your platform>-x86_64.sh
```

and follow the prompts.

---

**Note:** You must have write access to the installation directory. This is generally somewhere in the user’s home directory. When prompted, we recommend NOT making modifications to your bash\_profile.

---

**Warning:** We recommend that you do not install this package as root. Conda is intended to support on-the-fly creation of several independent environments, and [managing a multi-user conda installation is somewhat involved](#).

## Usage

Any time you want to use this conda environment in a terminal, run

```
$ source <install_directory>/etc/profile.d/conda.sh
$ conda activate base
```

Once the base environment is activated, your system will default to use python (and other executables) from the newly installed conda environment.

## Installing optional OpenEye toolkits

We're waiting on permission to redistribute the OpenEye toolkits inside the single-file installer, so for now the installers only ship with the open-source backend (RDKit+AmberTools). With this in mind, the conda environment created by the installer *contains the conda package manager itself*, which can be used to install the OpenEye toolkits if you have access to the Anaconda cloud.

```
$ conda install -c openeye openeye-toolkits
```

---

**Note:** The OpenEye Toolkits conda package still requires a valid OpenEye license file to run.

---

## 1.2 Release History

Releases follow the major.minor.micro scheme recommended by [PEP440](#), where

- major increments denote a change that may break API compatibility with previous major releases
- minor increments add features but do not break API compatibility
- micro increments represent bugfix releases or improvements in documentation

### 1.2.1 0.8.0 - Virtual Sites

This release implements the SMIRNOFF virtual site specification. The implementation enables support for models using off-site charges, including 4- and 5-point water models, in addition to lone pair modeling on various functional groups. The primary focus was on the ability to parameterize a system using virtual sites, and generating an OpenMM system with all virtual sites present and ready for evaluation. Support for formats other than OpenMM has not been implemented in this release, but may come with the appearance of the OpenFF system object. In addition to implementing the specification, the toolkit `Molecule` objects now allow the creation and manipulation of virtual sites.

#### Major Feature: Support for the SMIRNOFF VirtualSite tag

Virtual sites can be added to a System in two ways:

- `SMIRNOFF Force Fields` can contain a `VirtualSites` tag, specifying the addition of virtual sites according to SMARTS-based rules.
- Virtual sites can be added to a `Molecule`, and these will appear in the final OpenMM system if a virtual site handler is present in the `ForceField`.

Virtual sites are the first parameters which directly depend on 3D conformation, where the position of the virtual sites are based on vectors defined on the atoms that were matched during parameterization. Because of this, a virtual site matching the triplet of atoms 1-2-3 will define a point that is different from a triplet matching 3-2-1. This is similar to defining “right-handed” and “left-handed” coordinate systems. This subtlety interplays with two major concepts in force field development:

- 1) we sometimes want to define a single virtual site describing two points with the same parameters (distance, angle, etc.), such as 5-point water models
- 2) we have a match that produces multiple orderings of the atoms (e.g. if wildcards are present in the SMARTS pattern), and we only want one to be applied.

Case 1) is very useful for parameter optimization, where a single SMARTS-based parameter can be used to optimize both points, such as the angle defining the virtual points for a 5-point water model. Case 2) is the typical scenario for the nitrogen lone pair in ammonia, where only one point needs to be specified. We discuss a few more illustrative examples below. Beyond these attributes, the virtual site specification allows a policy for specifying how to handle exclusions in the OpenMM force evaluator. The current default is to add pairwise energy exclusions in the OpenMM system between a virtual site and all tagged atoms matched in its SMARTS (`exclusion_policy="parents"`, ). Currently defined are “none”, “minimal”, and “parents”, where “minimal” specifies the single atom that the virtual site defines as the “origin”. For water, for example, “minimal” would mean just the oxygen, whereas “parents” would mean all three atoms.

In order to give consistent and intended behavior, the specification was modified from its draft form in following manner: The “name” and “match” attributes have been added to each virtual site parameter type. These changes allow for

- specifying different virtual site types using the same atoms
- allowing two virtual sites with the same type and same atoms but different physical parameters to be added simultaneously
- allowing the ability to control whether the virtual site encodes one or multiple particles, based on the number of ways the matching atoms can be ordered.

The “name” attribute encodes whether the virtual site to be added should override an existing virtual site of the same type (e.g. hierarchy preference), or if this virtual site should be added in addition to the other existing virtual sites on the given atoms. This means that different virtual site types can share the same group of parent atoms and use the same name without overwriting each other (the default name is EP for all sites, which gives the expected hierarchical behavior used in other SMIRNOFF tags).

The "match" attribute accepts either "once" or "all\_permutations", offering control for situations where a SMARTS pattern can possibly match the same group of atoms in different orders (either due to wildcards or local symmetry) and it is desired to either add just one or all of the possible virtual particles. The default value is "all\_permutations", but for TrivalentLonePair it is always set to "once", regardless of what the file contains, since all orderings always place the particle in the exact same position.

The following cases exemplify our reasoning in implementing this behavior, and should draw caution to complex issues that may arise when designing virtual site parameters. Let us consider 4-, 5-, and 6-point water models:

- A 4-point water model with a DivalentLonePair: This can be implemented by specifying `match="once"`, `outOfPlaneAngle="0*degree"`, and `distance=-.15*angstrom`. Since the SMARTS pattern "[#1:1]-[#8X2:2]-[#2:3]" would match water twice and would create two particles in the exact same position if `all_permutations` was specified, we specify "once" to have only one particle generated. Although having two particles in the same position should not affect the physics if the proper exclusion policy is applied, it would effectively make the 4-point model just as expensive as 5-point models.
- A 5-point water model with a DivalentLonePair: This can be implemented by using `match="all_permutations"` (unlike the 4-point model), `outOfPlaneAngle="56.26*degree"`, and `distance=0.7*angstrom`, for example. Here the permutations will cause particles to be placed at  $\pm 56.26$  degrees, and changing any of the physical quantities will affect *both* particles.
- A 6-point water model with both DivalentLonePair sites above. Since these two parameters look identical, it is unclear whether they should both be applied or if one should override the other. The toolkit never compares the physical numbers to determine equality as this can lead to instability during e.g. parameter fitting. To get this to work, we specify `name="EP1"` for the first parameter, and `name="EP2"` for the second parameter. This instructs the parameter handler keep them separate, and therefore both are applied. (If both had the same name, then the typical SMIRNOFF hierarchy rules are used, and only the last matched parameter would be applied.)
- Dinitrogen, N#N with a BondCharge virtual site. Since we want a BondCharge on both ends, we specify `match="all_permutations"`.
- Formaldehyde, H2C=O, with MonovalentLonePair virtual site(s) on the oxygen, with the aim of modeling both lone pairs. This one is subtle, since `[#1:3]-[#6X3:2]=[#8X1:1]` matches two unique groups of atoms (1-3-4 and 2-3-4). It is important to note in this situation that `match="all_permutations"` behaves exactly the same as `match="once"`. Due to the anchoring hydrogens (1 and 2) being symmetric but opposite about the bond between 3 and 4, a single parameter does correctly place both lone pairs. A standing issue here is that the default exclusion policy (parents) will allow these two virtual sites to interact since they have different indexed atoms (parents), causing the energy to be different than the non-virtual site parameterization. In the future, the `exclusion_policy="local"` will account for this, and make virtual sites that share at least one "parent" atom not interact with each other. As a special note: when applying a MonovalentLonePair to a completely symmetric molecule, e.g. water, `all_permutations` can come into play, but this will apply two particles (one for each hydrogen).

Finally, the toolkit handles the organization of atoms and virtual sites in a specific manner. Virtual sites are expected to be added *after all molecules in the topology are present*. This is because the Open Force Field Toolkit organizes a topology by placing all atoms first, then all virtual sites last. This differs from the OpenMM Modeller object, for example, which interleaves the order of atoms and virtual sites in such a way that all particles of a molecule are contiguous. In addition, due to the fact that a virtual site may contain multiple particles coupled to single parameters, the toolkit makes a distinction between a virtual *site*, and a virtual *particle*. A virtual site may represent multiple virtual particles, so the total number of particles cannot be directly determined by simply summing the number of atoms and virtual sites in a molecule. This is taken into account, however, and the [Molecule](#) and [Topology](#) classes now implement particle iterators.

#### Minor Feature: Support for the 0.4 ChargeIncrementModel tag

To allow for more convenient fitting of ChargeIncrement parameters, it is now possible to specify one

less `charge_increment` value than there are tagged atoms in a `ChargeIncrement`'s smirks. The missing `charge_increment` value will be calculated at parameterization-time to make the sum of the charge contributions from a `ChargeIncrement` parameter equal to zero. Since this change allows for force fields that are incompatible with the previous specification, this new style of `ChargeIncrement` must specify a `ChargeIncrementModel` section version of 0.4. All 0.3-compatible `ChargeIncrement` parameters are compatible with the 0.4 `ChargeIncrementModel` specification.

More details and examples of this change are available in [The `ChargeIncrementModel` tag in the SMIRNOFF specification](#)

## New features

- [PR #726](#): Adds support for the 0.4 `ChargeIncrementModel` spec, allowing for the specification of one fewer `charge_increment` values than there are tagged atoms in the smirks, and automatically assigning the final atom an offsetting charge.
- [PR #548](#): Adds support for the `VirtualSites` tag in the SMIRNOFF specification
- [PR #548](#): Adds `replace` and `all_permutations` kwarg to
  - `Molecule.add_bond_charge_virtual_site`
  - `Molecule.add_monovalent_lone_pair_virtual_site`
  - `Molecule.add_divalent_lone_pair_virtual_site`
  - `Molecule.add_trivalent_lone_pair_virtual_site`
- [PR #548](#): Adds orientations to
  - `BondChargeVirtualSite`
  - `MonovalentLonePairVirtualSite`
  - `DivalentLonePairVirtualSite`
  - `TrivalentLonePairVirtualSite`
- [PR #548](#): Adds
  - `VirtualParticle`
  - `TopologyVirtualParticle`
  - `BondChargeVirtualSite.get_openmm_virtual_site`
  - `MonovalentLonePairVirtualSite.get_openmm_virtual_site`
  - `DivalentLonePairVirtualSite.get_openmm_virtual_site`
  - `TrivalentLonePairVirtualSite.get_openmm_virtual_site`
  - `ValenceDict.key_transform`
  - `ValenceDict.index_of`
  - `ImproperDict.key_transform`
  - `ImproperDict.index_of`
- [PR #705](#): Adds interpolation based on fractional bond orders for harmonic bonds. This includes interpolation for both the force constant `k` and/or equilibrium bond distance length. This is accompanied by a bump in the `<Bonds>` section of the SMIRNOFF spec (but not the entire spec).
- [PR #718](#): Adds `.rings` and `.n_rings` to `Molecule` and `.is_in_ring` to `Atom` and `Bond`

## Bugfixes

- PR #682: Catches failures in `Molecule.from_iupac` instead of silently failing.
- PR #743: Prevents the non-bonded (vdW) cutoff from silently falling back to the OpenMM default of 1 nm in `Forcefield.create_openmm_system` and instead sets its to the value specified by the force field.
- PR #737: Prevents OpenEye from incidentally being used in the conformer generation step of `AmberToolsToolkitWrapper.assign_fractional_bond_orders`.

## Behavior changed

- PR #705: Changes the default values in the <Bonds> section of the SMIRNOFF spec to `fractional_bondorder_method="AM1-Wiberg"` and `potential="(k/2)*(r-length)^2"`, which is backwards-compatible with and equivalent to `potential="harmonic"`.

## Examples added

- PR #548: Adds a virtual site example notebook to run an OpenMM simulation with virtual sites, and compares positions and potential energy of TIP5P water between OpenFF and OpenMM forcefields.

## API-breaking changes

- PR #548: Methods
  - `Molecule.add_bond_charge_virtual_site`
  - `Molecule.add_monovalent_lone_pair_virtual_site`
  - `Molecule.add_divalent_lone_pair_virtual_site`
  - `Molecule.add_trivalent_lone_pair_virtual_site`now only accept a list of atoms, not a list of integers, to define to parent atoms
- PR #548: Removes `VirtualParticle.molecule_particle_index`
- PR #548: Removes `outOfPlaneAngle` from
  - `DivalentLonePairVirtualSite`
  - `TrivalentLonePairVirtualSite`
- PR #548: Removes `inPlaneAngle` from `TrivalentLonePairVirtualSite`
- PR #548: Removes weights from
  - `BondChargeVirtualSite`
  - `MonovalentLonePairVirtualSite`
  - `DivalentLonePairVirtualSite`
  - `TrivalentLonePairVirtualSite`

### Tests added

- [PR #548](#): Adds test for
  - The virtual site parameter handler
  - TIP5P water dimer energy and positions
  - Adds tests to for virtual site/particle indexing/counting

## 1.2.2 0.7.2 - Bugfix and minor feature release

### New features

- [PR #662](#): Adds `.aromaticity_model` of `ForceField` and `.TAGNAME` of `ParameterHandler` as public attributes.
- [PR #667](#) and [PR #681](#) linted the codebase with black and isort, respectively.
- [PR #675](#) adds `.toolkit_version` to `ToolkitWrapper` and `.registered_toolkit_versions` to `ToolkitRegistry`.
- [PR #696](#) Exposes a setter for `ForceField.aromaticity_model`
- [PR #685](#) Adds a custom `__hash__` function to `ForceField`

### Behavior changed

- [PR #684](#): Changes `ToolkitRegistry` to return an empty registry when initialized with no arguments, i.e. `ToolkitRegistry()` and makes the `register_imported_toolkit_wrappers` argument private.
- [PR #711](#): The setter for `Topology.box_vectors` now infers box vectors (a 3x3 matrix) when box lengths (a 3x1 array) are passed, assuming an orthogonal box.
- [PR #649](#): Makes SMARTS searches stereochemistry-specific (if stereo is specified in the SMARTS) for both OpenEye and RDKit backends. Also ensures molecule aromaticity is re-perceived according to the ForceField's specified aromaticity model, which may overwrite user-specified aromaticity on the Molecule
- [PR #648](#): Removes the `utils.structure` module, which was deprecated in 0.2.0.
- [PR #670](#): Makes the `Topology` returned by `create_openmm_system` contain the partial charges and partial bond orders (if any) assigned during parameterization.
- [PR #675](#) changes the exception raised when no antechamber executable is found from `IOError` to `AntechamberNotFoundError`
- [PR #696](#) Adds an `aromaticity_model` keyword argument to the `ForceField` constructor, which defaults to `DEFAULT_AROMATICITY_MODEL`.

## Bugfixes

- [PR #715](#): Closes issue [Issue #475](#) writing a “PDB” file using OE backend rearranges the order of the atoms by pushing the hydrogens to the bottom.
- [PR #649](#): Prevents 2020 OE toolkit from issuing a warning caused by doing stereo-specific smarts searches on certain structures.
- [PR #724](#): Closes issue [Issue #502](#) Adding a utility function `Topology.to_file()` to write topology and positions to a “PDB” file using openmm backend for pdb file write.

## Tests added

- [PR #694](#): Adds automated testing to code snippets in docs.
- [PR #715](#): Adds tests for pdb file writes using OE backend.
- [PR #724](#): Adds tests for the utility function `Topology.to_file()`.

## 1.2.3 0.7.1 - OETK2020 Compatibility and Minor Update

This is the first of our patch releases on our new planned monthly release schedule.

Detailed release notes are below, but the major new features of this release are updates for compatibility with the new 2020 OpenEye Toolkits release, the `get_available_force_fields` function, and the disregarding of pyrimidal nitrogen stereochemistry in molecule isomorphism checks.

## Behavior changed

- [PR #646](#): Checking for `Molecule` equality using the `==` operator now disregards all pyrimidal nitrogen stereochemistry by default. To re-enable, use `Molecule.{is|are}_isomorphic` with the `strip_pyrimidal_n_atom_stereo=False` keyword argument.
- [PR #646](#): Adds an optional `toolkit_registry` keyword argument to `Molecule.are_isomorphic`, which identifies the toolkit that should be used to search for pyrimidal nitrogens.

## Bugfixes

- [PR #647](#): Updates `OpenEyeToolkitWrapper` for 2020.0.4 OpenEye Toolkit behavior/API changes.
- [PR #646](#): Fixes a bug where `Molecule.chemical_environment_matches` was not able to accept a `ChemicalEnvironment` object as a query.
- [PR #634](#): Fixes a bug in which calling `RDKitToolkitWrapper.from_file` directly would not load files correctly if passed lowercase `file_format`. Note that this bug did not occur when calling `Molecule.from_file`.
- [PR #631](#): Fixes a bug in which calling `unit_to_string` returned `None` when the unit is dimensionless. Now “dimensionless” is returned.
- [PR #630](#): Closes issue [Issue #629](#) in which the wrong exception is raised when attempting to instantiate a `ForceField` from an unparsable string.



## New features

- [PR #632](#): Adds `ForceField.registered_parameter_handlers`
- [PR #614](#): Adds `ToolkitRegistry.deregister_toolkit` to de-register registered toolkits, which can include toolkit wrappers loaded into `GLOBAL_TOOLKIT_REGISTRY` by default.
- [PR #656](#): Adds a new allowed `am1elf10` option to the OpenEye implementation of `assign_partial_charges` which calculates the average partial charges at the AM1 level of theory using conformers selected using the ELF10 method.
- [PR #643](#): Adds `openforcefield.typing.engines.smirnoff.forcefield.get_available_force_fields`, which returns paths to the files of force fields available through entry point plugins.

### 1.2.4 0.7.0 - Charge Increment Model, Proper Torsion interpolation, and new Molecule methods

This is a relatively large release, motivated by the idea that changing existing functionality is bad so we shouldn't do it too often, but when we do change things we should do it all at once.

Here's a brief rundown of what changed, migration tips, and how to find more details in the full release notes below:

- To provide more consistent partial charges for a given molecule, existing conformers are now disregarded by default by `Molecule.assign_partial_charges`. Instead, new conformers are generated for use in semiempirical calculations. Search for `use_conformers`.
- Formal charges are now always returned as `simtk.unit.Quantity` objects, with units of elementary charge. To convert them to integers, use `from simtk import unit` and `atom.formal_charge.value_in_unit(unit.elementary_charge)` or `mol.total_charge.value_in_unit(unit.elementary_charge)`. Search `atom.formal_charge`.
- The OpenFF Toolkit now automatically reads and writes partial charges in SDF files. Search for `atom.dprop.PartialCharges`.
- The OpenFF Toolkit now has different behavior for handling multi-molecule and multi-conformer SDF files. Search `multi-conformer`.
- The OpenFF Toolkit now distinguishes between partial charges that are all-zero and partial charges that are unknown. Search `partial_charges = None`.
- `Topology.to_openmm` now assigns unique atoms names by default. Search `ensure_unique_atom_names`.
- Molecule equality checks are now done by graph comparison instead of SMILES comparison. Search `Molecule.are_isomorphic`.
- The `ChemicalEnvironment` module was almost entirely removed, as it is an outdated duplicate of some Chemper functionality. Search `ChemicalEnvironment`.
- `TopologyMolecule.topology_particle_start_index` has been removed from the `TopologyMolecule` API, since atoms and virtualsites are no longer contiguous in the `Topology` particle indexing system. Search `topology_particle_start_index`.
- `compute_wiberg_bond_orders` has been renamed to `assign_fractional_bond_orders`.

There are also a number of new features, such as:

- Support for `ChargeIncrementModel` sections in force fields.
- Support for `ProperTorsion` k interpolation in force fields using fractional bond orders.

- Support for AM1-Mulliken, Gasteiger, and other charge methods using the new `assign_partial_charges` methods.
- Support for AM1-Wiberg bond order calculation using either the OpenEye or RDKit/AmberTools backends and the `assign_fractional_bond_orders` methods.
- Initial (limited) interoperability with QCArchive, via `Molecule.to_qcschema` and `from_qcschema`.
- A `Molecule.visualize` method.
- Several additional `Molecule` methods, including state enumeration and mapped SMILES creation.

### Major Feature: Support for the SMIRNOFF `ChargeIncrementModel` tag

The `ChargeIncrementModel` tag in the SMIRNOFF specification provides analogous functionality to AM1-BCC, except that instead of AM1-Mulliken charges, a number of different charge methods can be called, and instead of a fixed library of two-atom charge corrections, an arbitrary number of SMIRKS-based, N-atom charge corrections can be defined in the SMIRNOFF format.

The initial implementation of the SMIRNOFF `ChargeIncrementModel` tag accepts keywords for `version`, `partial_charge_method`, and `number_of_conformers`. `partial_charge_method` can be any string, and it is up to the `ToolkitWrapper`'s `compute_partial_charges` methods to understand what they mean. For geometry-independent `partial_charge_method` choices, `number_of_conformers` should be set to zero.

SMIRKS-based parameter application for `ChargeIncrement` parameters is different than other SMIRNOFF sections. The initial implementation of `ChargeIncrementModelHandler` follows these rules:

- an atom can be subject to many `ChargeIncrement` parameters, which combine additively.
- a `ChargeIncrement` that matches a set of atoms is overwritten only if another `ChargeIncrement` matches the same group of atoms, regardless of order. This overriding follows the normal SMIRNOFF hierarchy.

To give a concise example, what if a molecule A-B(-C)-D were being parametrized, and the force field defined `ChargeIncrement` SMIRKS in the following order?

- 1) [A:1]-[B:2]
- 2) [B:1]-[A:2]
- 3) [A:1]-[B:2]-[C:3]
- 4) [\*:1]-[B:2](-[\*:3])-[\*:4]
- 5) [D:1]-[B:2](-[\*:3])-[\*:4]

In the case above, the `ChargeIncrement` from parameters 1 and 4 would NOT be applied to the molecule, since another parameter matching the same set of atoms is specified further down in the parameter hierarchy (despite those subsequent matches being in a different order).

Ultimately, the `ChargeIncrement` contributions from parameters 2, 3, and 5 would be summed and applied.

It's also important to identify a behavior that these rules were written to *avoid*: if not for the “regardless of order” clause in the second rule, parameters 4 and 5 could actually have been applied six and two times, respectively (due to symmetry in the SMIRKS and the use of wildcards). This situation could also arise as a result of molecular symmetry. For example, a methyl group could match the SMIRKS [C:1]([H:2])([H:3])([H:4]) six ways (with different orderings of the three hydrogen atoms), but the user would almost certainly not intend for the charge increments to be applied six times. The “regardless of order” clause was added specifically to address this.

In short, the first time a group of atoms becomes involved in a `ChargeIncrement` together, the System gains a new parameter “slot”. Only another `ChargeIncrement` which applies to the exact same group of atoms (in any order) can take over the “slot”, pushing the original `ChargeIncrement` out.

### Major Feature: Support for ProperTorsion k value interpolation

Chaya Stern's work showed that we may be able to produce higher-quality proper torsion parameters by taking into account the "partial bond order" of the torsion's central bond. We now have the machinery to compute AM1-Wiberg partial bond orders for entire molecules using the `assign_fractional_bond_orders` methods of either `OpenEyeToolkitWrapper` or `AmberToolsToolkitWrapper`. The thought is that, if some simple electron population analysis shows that a certain aromatic bond's order is 1.53, maybe rotations about that bond can be described well by interpolating 53% of the way between the single and double bond  $k$  values.

Full details of how to define a torsion-interpolating SMIRNOFF force fields are available in [the ProperTorsions section of the SMIRNOFF specification](#).

### Behavior changed

- **PR #508:** In order to provide the same results for the same chemical species, regardless of input conformation, `Molecule` `assign_partial_charges`, `compute_partial_charges_ambcc`, and `assign_fractional_bond_orders` methods now default to ignore input conformers and generate new conformer(s) of the molecule before running semiempirical calculations. Users can override this behavior by specifying the keyword argument `use_conformers=molecule.conformers`.
- **PR #281:** Closes [Issue #250](#) by adding support for partial charge I/O in SDF. The partial charges are stored as a property in the SDF molecule block under the tag `<atom.dprop.PartialCharge>`.
- **PR #281:** If a `Molecule`'s `partial_charges` attribute is set to `None` (the default value), calling `to_openeye` will now produce a OE molecule with partial charges set to `nan`. This would previously produce an OE molecule with partial charges of `0.0`, which was a loss of information, since it wouldn't be clear whether the original OFFMol's partial charges were REALLY all-zero as opposed to `None`. OpenEye toolkit wrapper methods such as `from_smiles` and `from_file` now produce OFFMols with `partial_charges = None` when appropriate (previously these would produce OFFMols with all-zero charges, for the same reasoning as above).
- **PR #281:** `Molecule` `to_rdkit` now sets partial charges on the `RDAtom`'s `PartialCharges` property (this was previously set on the `partial_charges` property). If the `Molecule`'s `partial_charges` attribute is `None`, this property will not be defined on the `RDAtoms`.
- **PR #281:** Enforce the behavior during SDF I/O that a SDF may contain multiple *molecules*, but that the OFF Toolkit does not assume that it contains multiple *conformers of the same molecule*. This is an important distinction, since otherwise there is ambiguity around whether properties of one entry in a SDF are shared among several molecule blocks or not, or how to resolve conflicts if properties are defined differently for several "conformers" of chemically-identical species (More info [here](#)). If the user requests the OFF Toolkit to write a multi-conformer `Molecule` to SDF, only the first conformer will be written. For more fine-grained control of writing properties, conformers, and partial charges, consider using `Molecule.to_rdkit` or `Molecule.to_openeye` and using the functionality offered by those packages.
- **PR #281:** Due to different constraints placed on the data types allowed by external toolkits, we make our best effort to preserve `Molecule` properties when converting molecules to other packages, but users should be aware that no guarantee of data integrity is made. The only data format for keys and values in the property dict that we will try to support through a roundtrip to another toolkit's `Molecule` object is `string`.
- **PR #574:** Removed check that all partial charges are zero after assignment by `quacpac` when `AM1BCC` used for charge assignment. This check fails erroneously for cases in which the partial charge assignments are correctly all zero, such as for `N#N`. It is also an unnecessary check given that `quacpac` will reliably indicate when it has failed to assign charges.
- **PR #597:** Energy-minimized sample systems with Parsley 1.1.0.
- **PR #558:** The `Topology` particle indexing system now orders `TopologyVirtualSites` after all atoms.

- [PR #469](#): When running `Topology.to_openmm`, unique atom names are generated if the provided atom names are not unique (overriding any existing atom names). This uniqueness extends only to atoms in the same molecule. To disable this behavior, set the kwarg `ensure_unique_atom_names=False`.
- [PR #472](#): `Molecule.__eq__` now uses the new `Molecule.are_isomorphic` to perform the similarity checking.
- [PR #472](#): The `Topology.from_openmm` and `Topology.add_molecule` methods now use the `Molecule.are_isomorphic` method to match molecules.
- [PR #551](#): Implemented the `ParameterHandler.get_parameter` function (would previously return `None`).

## API-breaking changes

- [PR #471](#): Closes [Issue #465](#). `atom.formal_charge` and `molecule.total_charge` now return `simtk.unit.Quantity` objects instead of integers. To preserve backward compatibility, the setter for `atom.formal_charge` can accept either a `simtk.unit.Quantity` or an integer.
- [PR #601](#): Removes almost all of the previous `ChemicalEnvironment` API, since this entire module was simply copied from `Chemper` several years ago and has fallen behind on updates. Currently only `ChemicalEnvironment.get_type`, `ChemicalEnvironment.validate`, and an equivalent classmethod `ChemicalEnvironment.validate_smirks` remain. Also, please comment on [this GitHub issue](#) if you HAVE been using the previous extra functionality in this module and would like us to prioritize creation of a `Chemper` conda package.
- [PR #558](#): Removes `TopologyMolecule.topology_particle_start_index`, since the `Topology` particle indexing system now orders `TopologyVirtualSites` after all atoms. `TopologyMolecule.topology_atom_start_index` and `TopologyMolecule.topology_virtual_site_start_index` are still available to access the appropriate values in the respective topology indexing systems.
- [PR #508](#): `OpenEyeToolkitWrapper.compute_wiberg_bond_orders` is now `OpenEyeToolkitWrapper.assign_fractional_bond_orders`. The `charge_model` keyword is now `bond_order_model`. The allowed values of this keyword have changed from `am1` and `pm3` to `am1-wiberg` and `pm3-wiberg`, respectively.
- [PR #508](#): `Molecule.compute_wiberg_bond_orders` is now `Molecule.assign_fractional_bond_orders`.
- [PR #595](#): Removed functions `openforcefield.utils.utils.temporary_directory` and `openforcefield.utils.utils.temporary_cd` and replaced their behavior with `tempfile.TemporaryDirectory()`.

## New features

- [PR #471](#): Closes [Issue #208](#) by implementing support for the `ChargeIncrementModel` tag in the SMIRNOFF specification.
- [PR #471](#): Implements `Molecule.assign_partial_charges`, which calls one of the newly-implemented `OpenEyeToolkitWrapper.assign_partial_charges`, and `AmberToolsToolkitWrapper.assign_partial_charges`. `strict_n_conformers` is a optional boolean keyword argument indicating whether an `IncorrectNumConformersError` should be raised if an invalid number of conformers is supplied during partial charge calculation. For example, if two conformers are supplied, but `partial_charge_method="AM1BCC"` is also set, then there is no clear use for the second conformer. The previous behavior in this case was to raise a warning, and to preserve that behavior, `strict_n_conformers` defaults to a value of `False`.
- [PR #471](#): Adds keyword argument `raise_exception_types` (default: `[Exception]`) to `ToolkitRegistry.call`. The default value will provide the previous OpenFF Toolkit behavior, which is that the first `ToolkitWrapper` that can provide the requested method is called, and it either returns

on success or raises an exception. This new keyword argument allows the ToolkitRegistry to *ignore* certain exceptions, but treat others as fatal. If `raise_exception_types = []`, the ToolkitRegistry will attempt to call each ToolkitWrapper that provides the requested method and if none succeeds, a single `ValueError` will be raised, with text listing the errors that were raised by each ToolkitWrapper.

- PR #601: Adds `RDKitToolkitWrapper.get_tagged_smarts_connectivity` and `OpenEyeToolkitWrapper.get_tagged_smarts_connectivity`, which allow the use of either toolkit for smirks/tagged smarts validation.
- PR #600: Adds `ForceField.__getitem__` to look up `ParameterHandler` objects based on their string names.
- PR #508: Adds `AmberToolsToolkitWrapper.assign_fractional_bond_orders`.
- PR #469: The `Molecule` class adds `Molecule.has_unique_atom_names` and `Molecule.has_unique_atom_names`.
- PR #472: Adds to the `Molecule` class `Molecule.are_isomorphic` and `Molecule.is_isomorphic_with` and `Molecule.hill_formula` and `Molecule.to_hill_formula` and `Molecule.to_qcschema` and `Molecule.from_qcschema` and `Molecule.from_mapped_smiles` and `Molecule.from_pdb_and_smiles` and `Molecule.canonical_order_atoms` and `Molecule.remap`

---

**Note:** The `to_qcschema` method accepts an extras dictionary which is passed into the validated `qcelestial.models.Molecule` object.

---

- PR #506: The `Molecule` class adds `Molecule.find_rotatable_bonds`
- PR #521: Adds `Molecule.to_inchi` and `Molecule.to_inchikey` and `Molecule.from_inchi`

**Warning:** InChI was not designed as an molecule interchange format and using it as one is not recommended. Many round trip tests will fail when using this format due to a loss of information. We have also added support for fixed hydrogen layer nonstandard InChI which can help in the case of tautomers, but overall creating molecules from InChI should be avoided.

- PR #529: Adds the ability to write out to XYZ files via `Molecule.to_file` Both single frame and multiframe XYZ files are supported. Note reading from XYZ files will not be supported due to the lack of connectivity information.
- PR #535: Extends the the API for the `Molecule.to_smiles` to allow for the creation of cmiles identifiers through combinations of isomeric, explicit hydrogen and mapped smiles, the default settings will return isomeric explicit hydrogen smiles as expected.

**Warning:** Atom maps can be supplied to the properties dictionary to modify which atoms have their map index included, if no map is supplied all atoms will be mapped in the order they appear in the `Molecule`.

- PR #563: Adds `test_forcefields/ion_charges.offxml`, giving `LibraryCharges` for monatomic ions.
- PR #543: Adds 3 new methods to the `Molecule` class which allow the enumeration of molecule states. These are `Molecule.enumerate_tautomers`, `Molecule.enumerate_stereoisomers`, `Molecule.enumerate_protomers`

**Warning:** Enumerate protomers is currently only available through the OpenEye toolkit.

- [PR #573](#): Adds quacpac error output to quacpac failure in `Molecule.compute_partial_charges_ambcc`.
- [PR #560](#): Added visualization method to the `Molecule` class.
- [PR #620](#): Added the ability to register parameter handlers via entry point plugins. This functionality is accessible by initializing a `ForceField` with the `load_plugins=True` keyword argument.
- [PR #582](#): Added fractional bond order interpolation Adds `return_topology` kwarg to `Forcefield.create_openmm_system`, which returns the processed topology along with the system when True (default False).

### Tests added

- [PR #558](#): Adds tests ensuring that the new Topology particle indexing system are properly implemented, and that `TopologyVirtualSites` reference the correct `TopologyAtoms`.
- [PR #469](#): Added round-trip SMILES test to add coverage for `Molecule.from_smiles`.
- [PR #469](#): Added tests for unique atom naming behavior in `Topology.to_openmm`, as well as tests of the `ensure_unique_atom_names=False` kwarg disabling this behavior.
- [PR #472](#): Added tests for `Molecule.hill_formula` and `Molecule.to_hill_formula` for the various supported input types.
- [PR #472](#): Added round-trip test for `Molecule.from_qcschema` and `Molecule.to_qcschema`.
- [PR #472](#): Added tests for `Molecule.is_isomorphic_with` and `Molecule.are_isomorphic` with various levels of isomorphic graph matching.
- [PR #472](#): Added toolkit dependent tests for `Molecule.canonical_order_atoms` due to differences in the algorithms used.
- [PR #472](#): Added a test for `Molecule.from_mapped_smiles` using the molecule from issue #412 to ensure it is now fixed.
- [PR #472](#): Added a test for `Molecule.remap`, this also checks for expected error when the mapping is not complete.
- [PR #472](#): Added tests for `Molecule.from_pdb_and_smiles` to check for a correct combination of smiles and PDB and incorrect combinations.
- [PR #509](#): Added test for `Molecule.chemical_environment_matches` to check that the complete set of matches is returned.
- [PR #509](#): Added test for `Forcefield.create_openmm_system` to check that a protein system can be created.
- [PR #506](#): Added a test for the molecule identified in issue #513 as losing aromaticity when converted to rdkit.
- [PR #506](#): Added a verity of toolkit dependent tests for identifying rotatable bonds while ignoring the user requested types.
- [PR #521](#): Added toolkit independent round-trip InChI tests which add coverage for `Molecule.to_inchi` and `Molecule.from_inchi`. Also added coverage for bad inputs and `Molecule.to_inchikey`.
- [PR #529](#): Added to XYZ file coverage tests.



- [PR #563](#): Added *LibraryCharges* parameterization test for monatomic ions in `test_forcefields/ion_charges.offxml`.
- [PR #543](#): Added tests to assure that state enumeration can correctly find molecules tautomers, stereoisomers and protomers when possible.
- [PR #573](#): Added test for quacpac error output for quacpac failure in `Molecule.compute_partial_charges_amlbcc`.
- [PR #579](#): Adds regression tests to ensure RDKit can be used to write multi-model PDB files.
- [PR #582](#): Added fractional bond order interpolation tests, tests for `ValidatedDict`.

## Bugfixes

- [PR #558](#): Fixes a bug where `TopologyVirtualSite.atoms` would not correctly apply `TopologyMolecule` atom ordering on top of the reference molecule ordering, in cases where the same molecule appears multiple times, but in a different order, in the same `Topology`.
- [Issue #460](#): Creates unique atom names in `Topology.to_openmm` if the existing ones are not unique. The lack of unique atom names had been causing problems in workflows involving downstream tools that expect unique atom names.
- [Issue #448](#): We can now make molecules from mapped smiles using `Molecule.from_mapped_smiles` where the order will correspond to the indexing used in the smiles. Molecules can also be re-indexed at any time using the `Molecule.remap`.
- [Issue #462](#): We can now instance the `Molecule` from a QCArchive entry record instance or dictionary representation.
- [Issue #412](#): We can now instance the `Molecule` using `Molecule.from_mapped_smiles`. This resolves an issue caused by RDKit considering atom map indices to be a distinguishing feature of an atom, which led to erroneous definition of chirality (as otherwise symmetric substituents would be seen as different). We anticipate that this will reduce the number of times you need to type `allow_undefined_stereo=True` when processing molecules that do not actually contain stereochemistry.
- [Issue #513](#): The `Molecule.to_rdkit` now re-sets the aromaticity model after sanitizing the molecule.
- [Issue #500](#): The `Molecule.find_rotatable_bonds` has been added which returns a list of rotatable `Bond` instances for the molecule.
- [Issue #491](#): We can now parse large molecules without hitting a match limit cap.
- [Issue #474](#): We can now convert molecules to InChI and InChIKey and from InChI.
- [Issue #523](#): The `Molecule.to_file` method can now correctly write to MOL files, in line with the supported file type list.
- [Issue #568](#): The `Molecule.to_file` can now correctly write multi-model PDB files when using the RDKit backend toolkit.

## Examples added

- [PR #591](#) and [PR #533](#): Adds an [example notebook and utility to compute conformer energies](#). This example is made to be reverse-compatible with the 0.6.0 OpenFF Toolkit release.
- [PR #472](#): Adds an example notebook [QCarchive\\_interface.ipynb](#) which shows users how to instance the [Molecule](#) from a QCarchive entry level record and calculate the energy using RDKit through QCEngine.

## 1.2.5 0.6.0 - Library Charges

This release adds support for a new SMIRKS-based charge assignment method, [Library Charges](#). The addition of more charge assignment methods opens the door for new types of experimentation, but also introduces several complex behaviors and failure modes. Accordingly, we have made changes to the charge assignment infrastructure to check for cases when partial charges do not sum to the formal charge of the molecule, or when no charge assignment method is able to generate charges for a molecule. More detailed explanation of the new errors that may be raised and keywords for overriding them are in the “Behavior Changed” section below.

With this release, we update `test_forcefields/tip3p.offxml` to be a working example of assigning `LibraryCharges`. However, we do not provide any force field files to assign protein residue `LibraryCharges`. If you are interested in translating an existing protein FF to SMIRNOFF format or developing a new one, please feel free to contact us on the [Issue tracker](#) or open a [Pull Request](#).

## New features

- [PR #433](#): Closes [Issue #25](#) by adding initial support for the [LibraryCharges tag in the SMIRNOFF specification](#) using `LibraryChargeHandler`. For a molecule to have charges assigned using `LibraryCharges`, all of its atoms must be covered by at least one `LibraryCharge`. If an atom is covered by multiple `LibraryCharge`s, then the last `LibraryCharge` matched will be applied (per the hierarchy rules in the SMIRNOFF format).

This functionality is thus able to apply per-residue charges similar to those in traditional protein force fields. At this time, there is no concept of “residues” or “fragments” during parametrization, so it is not possible to assign charges to *some* atoms in a molecule using `LibraryCharge`s, but calculate charges for other atoms in the same molecule using a different method. To assign charges to a protein, `LibraryCharges` SMARTS must be provided for the residues and protonation states in the molecule, as well as for any capping groups and post-translational modifications that are present.

It is valid for `LibraryCharge` SMARTS to *partially* overlap one another. For example, a molecule consisting of atoms A-B-C connected by single bonds could be matched by a SMIRNOFF `LibraryCharges` section containing two `LibraryCharge` SMARTS: A-B and B-C. If listed in that order, the molecule would be assigned the A charge from the A-B `LibraryCharge` element and the B and C charges from the B-C element. In testing, these types of partial overlaps were found to frequently be sources of undesired behavior, so it is recommended that users define whole-molecule `LibraryCharge` SMARTS whenever possible.

- [PR #455](#): Addresses [Issue #393](#) by adding `ParameterHandler.attribute_is_cosmetic` and `ParameterType.attribute_is_cosmetic`, which return True if the provided attribute name is defined for the queried object but does not correspond to an allowed value in the SMIRNOFF spec.



## Behavior changed

- [PR #433](#): If a molecule can not be assigned charges by any charge-assignment method, an `openforcefield.typing.engines.smirnoff.parameters.UnassignedMoleculeChargeException` will be raised. Previously, creating a system without either `ToolkitAM1BCCHandler` or the `charge_from_molecules` keyword argument to `ForceField.create_openmm_system` would produce a system where the molecule has zero charge on all atoms. However, given that we will soon be adding more options for charge assignment, it is important that failures not be silent. Molecules with zero charge can still be produced by setting the `Molecule.partial_charges` array to be all zeroes, and including the molecule in the `charge_from_molecules` keyword argument to `create_openmm_system`.
- [PR #433](#): Due to risks introduced by permitting charge assignment using partially-overlapping `LibraryCharges`, the toolkit will now raise a `openforcefield.typing.engines.smirnoff.parameters.NonIntegralMoleculeChargeException` if the sum of partial charges on a molecule are found to be more than 0.01 elementary charge units different than the molecule's formal charge. This exception can be overridden by providing the `allow_nonintegral_charges=True` keyword argument to `ForceField.create_openmm_system`.

## Tests added

- [PR #430](#): Added test for Wiberg Bond Order implemented in OpenEye Toolkits. Molecules taken from DOI:10.5281/zenodo.3405489 . Added by Sukanya Sasmal.
- [PR #569](#): Added round-trip tests for more serialization formats (dict, YAML, TOML, JSON, BSON, messagepack, pickle). Note that some are unsupported, but the tests raise the appropriate error.

## Bugfixes

- [PR #431](#): Fixes an issue where `ToolkitWrapper` objects would improperly search for functionality in the `GLOBAL_TOOLKIT_REGISTRY`, even though a specific `ToolkitRegistry` was requested for an operation.
- [PR #439](#): Fixes [Issue #438](#), by replacing call to `NetworkX Graph.node` with call to `Graph.nodes`, per [2.4 migration guide](#).

## Files modified

- [PR #433](#): Updates the previously-nonfunctional `test_forcefields/tip3p.offxml` to a functional state by updating it to the SMIRNOFF 0.3 specification, and specifying atomic charges using the `LibraryCharges` tag.

### 1.2.6 0.5.1 - Adding the parameter coverage example notebook

This release contains a new notebook example, [check\\_parameter\\_coverage.ipynb](#), which loads sets of molecules, checks whether they are parameterizable, and generates reports of chemical motifs that are not. It also fixes several simple issues, improves warnings and docstring text, and removes unused files.

The parameter coverage example notebook goes hand-in-hand with the release candidate of our initial force field, [openff-1.0.0-RC1.offxml](#) , which will be temporarily available until the official force field release is made in October. Our goal in publishing this notebook alongside our first major refitting is to allow interested users to check whether there is parameter coverage for their molecules of interest. If the force field is unable to parameterize a molecule, this notebook will generate reports of the specific chemistry that is not covered. We understand that many organizations in our field have restrictions about sharing specific molecules, and

the outputs from this notebook can easily be cropped to communicate unparameterizable chemistry without revealing the full structure.

The force field release candidate is in our new refit force field package, [openforcefields](#). This package is now a part of the Open Force Field Toolkit conda recipe, along with the original [smirnoff99Frosst](#) line of force fields.

Once the openforcefields conda package is installed, you can load the release candidate using:

```
ff = ForceField('openff-1.0.0-RC1.offxml')
```

The release candidate will be removed when the official force field, openff-1.0.0.offxml, is released in early October.

Complete details about this release are below.

### Example added

- [PR #419](#): Adds an example notebook [check\\_parameter\\_coverage.ipynb](#) which shows how to use the toolkit to check a molecule dataset for missing parameter coverage, and provides functionality to output tagged SMILES and 2D drawings of the unparameterizable chemistry.

### New features

- [PR #419](#): Unassigned valence parameter exceptions now include a list of tuples of [TopologyAtom](#) which were unable to be parameterized (`exception.unassigned_topology_atom_tuples`) and the class of the [ParameterHandler](#) that raised the exception (`exception.handler_class`).
- [PR #425](#): Implements Trevor Gokey's suggestion from [Issue #411](#), which enables pickling of [ForceFields](#) and [ParameterHandlers](#). Note that, while XML representations of `ForceField`s` are stable and conform to the SMIRNOFF specification, the pickled `ForceField`s` that this functionality enables are not guaranteed to be compatible with future toolkit versions.

### Improved documentation and warnings

- [PR #425](#): Addresses [Issue #410](#), by explicitly having toolkit warnings print `Warning:` at the beginning of each warning, and adding clearer language to the warning produced when the OpenEye Toolkits can not be loaded.
- [PR #425](#): Addresses [Issue #421](#) by adding type/shape information to all Molecule partial charge and conformer docstrings.
- [PR #425](#): Addresses [Issue #407](#) by providing a more extensive explanation of why we don't use RDKit's mol2 parser for molecule input.

### Bugfixes

- [PR #419](#): Fixes [Issue #417](#) and [Issue #418](#), where `RDKitToolkitWrapper.from_file` would disregard the `allow_undefined_stereo` kwarg and skip the first molecule when reading a SMILES file.

## Files removed

- [PR #425](#): Addresses [Issue #424](#) by deleting the unused files `openforcefield/typing/engines/smirnoff/gbsaforces.py` and `openforcefield/tests/test_smirnoff.py`. `gbsaforces.py` was only used internally and `test_smirnoff.py` tested unsupported functionality from before the 0.2.0 release.

## 1.2.7 0.5.0 - GBSA support and quality-of-life improvements

This release adds support for the [GBSA tag in the SMIRNOFF specification](#). Currently, the HCT, OBC1, and OBC2 models (corresponding to AMBER keywords `igb=1`, `2`, and `5`, respectively) are supported, with the OBC2 implementation being the most flexible. Unfortunately, systems produced using these keywords are not yet transferable to other simulation packages via ParmEd, so users are restricted to using OpenMM to simulate systems with GBSA.

OFFXML files containing GBSA parameter definitions are available, and can be loaded in addition to existing parameter sets (for example, with the command `ForceField('test_forcefields/smirnoff99Frosst.offxml', 'test_forcefields/GBSA_OBC1-1.0.offxml')`). A manifest of new SMIRNOFF-format GBSA files is below.

Several other user-facing improvements have been added, including easier access to indexed attributes, which are now accessible as `torsion.k1`, `torsion.k2`, etc. (the previous access method `torsion.k` still works as well). More details of the new features and several bugfixes are listed below.

## New features

- [PR #363](#): Implements [GBSAHandler](#), which supports the [GBSA tag in the SMIRNOFF specification](#). Currently, only [GBSAHandlers](#) with `gb_model="OBC2"` support setting non-default values for the `surface_area_penalty` term (default  $5.4 \times \text{calories/mole/angstroms}^2$ ), though users can zero the SA term for OBC1 and HCT models by setting `sa_model="None"`. No model currently supports setting `solvent_radius` to any value other than  $1.4 \times \text{angstroms}$ . Files containing experimental SMIRNOFF-format implementations of HCT, OBC1, and OBC2 are included with this release (see below). Additional details of these models, including literature references, are available on the [SMIRNOFF specification page](#).

**Warning:** The current release of ParmEd can not transfer GBSA models produced by the Open Force Field Toolkit to other simulation packages. These GBSA forces are currently only computable using OpenMM.

- [PR #363](#): When using `Topology.to_openmm()`, periodic box vectors are now transferred from the Open Force Field Toolkit Topology into the newly-created OpenMM Topology.
- [PR #377](#): Single indexed parameters in [ParameterHandler](#) and [ParameterType](#) can now be get/set through normal attribute syntax in addition to the list syntax.
- [PR #394](#): Include element and atom name in error output when there are missing valence parameters during molecule parameterization.

## Bugfixes

- [PR #385](#): Fixes [Issue #346](#) by having `OpenEyeToolkitWrapper.compute_partial_charges_am1bcc` fall back to using standard AM1-BCC if AM1-BCC ELF10 charge generation raises an error about “trans COOH conformers”
- [PR #399](#): Fixes issue where `ForceField` constructor would ignore `parameter_handler_classes` kwarg.
- [PR #400](#): Makes link-checking tests retry three times before failing.

## Files added

- [PR #363](#): Adds `test_forcefields/GBSA_HCT-1.0.offxml`, `test_forcefields/GBSA_OBC1-1.0.offxml`, and `test_forcefields/GBSA_OBC2-1.0.offxml`, which are experimental implementations of GBSA models. These are primarily used in validation tests against OpenMM’s models, and their version numbers will increment if bugfixes are necessary.

## 1.2.8 0.4.1 - Bugfix Release

This update fixes several toolkit bugs that have been reported by the community. Details of these bugfixes are provided below.

It also refactors how `ParameterType` and `ParameterHandler` store their attributes, by introducing `ParameterAttribute` and `IndexedParameterAttribute`. These new attribute-handling classes provide a consistent backend which should simplify manipulation of parameters and implementation of new handlers.

## Bug fixes

- [PR #329](#): Fixed a bug where the two `BondType` parameter attributes `k` and `length` were treated as indexed attributes. (`k` and `length` values that correspond to specific bond orders will be indexed under `k_bondorder1`, `k_bondorder2`, etc when implemented in the future)
- [PR #329](#): Fixed a bug that allowed setting indexed attributes to single values instead of strictly lists.
- [PR #370](#): Fixed a bug in the API where `BondHandler`, `ProperTorsionHandler`, and `ImproperTorsionHandler` exposed non-functional indexed parameters.
- [PR #351](#): Fixes [Issue #344](#), in which the main `FrozenMolecule` constructor and several other Molecule-construction functions ignored or did not expose the `allow_undefined_stereo` keyword argument.
- [PR #351](#): Fixes a bug where a molecule which previously generated a SMILES using one cheminformatics toolkit returns the same SMILES, even though a different toolkit (which would generate a different SMILES for the molecule) is explicitly called.
- [PR #354](#): Fixes the error message that is printed if an unexpected parameter attribute is found while loading data into a `ForceField` (now instructs users to specify `allow_cosmetic_attributes` instead of `permit_cosmetic_attributes`)
- [PR #364](#): Fixes [Issue #362](#) by modifying `OpenEyeToolkitWrapper.from_smiles` and `RDKitToolkitWrapper.from_smiles` to make implicit hydrogens explicit before molecule creation. These functions also now raise an error if the optional keyword `hydrogens_are_explicit=True` but the SMILES are interpreted by the backend cheminformatic toolkit as having implicit hydrogens.
- [PR #371](#): Fixes error when reading early SMIRNOFF 0.1 spec files enclosed by a top-level SMIRFF tag.

---

**Note:** The enclosing SMIRFF tag is present only in legacy files. Since developing a formal specification, the only acceptable top-level tag value in a SMIRNOFF data structure is SMIRNOFF.

---

### Code enhancements

- [PR #329](#): `ParameterType` was refactored to improve its extensibility. It is now possible to create new parameter types by using the new descriptors `ParameterAttribute` and `IndexedParameterAttribute`.
- [PR #357](#): Addresses [Issue #356](#) by raising an informative error message if a user attempts to load an OpenMM topology which is probably missing connectivity information.

### Force fields added

- [PR #368](#): Temporarily adds `test_forcefields/smirnoff99frosst_experimental.offxml` to address hierarchy problems, redundancies, SMIRKS pattern typos etc., as documented in [issue #367](#). Will ultimately be propagated to an updated forcefield in the `openforcefield/smirnoff99frosst` repo.
- [PR #371](#): Adds `test_forcefields/smirff99Frosst_reference_0_1_spec.offxml`, a SMIRNOFF 0.1 spec file enclosed by the legacy SMIRFF tag. This file is used in backwards-compatibility testing.

## 1.2.9 0.4.0 - Performance optimizations and support for SMIRNOFF 0.3 specification

This update contains performance enhancements that significantly reduce the time to create OpenMM systems for topologies containing many molecules via `ForceField.create_openmm_system`.

This update also introduces the [SMIRNOFF 0.3 specification](#). The spec update is the result of discussions about how to handle the evolution of data and parameter types as further functional forms are added to the SMIRNOFF spec.

We provide methods to convert SMIRNOFF 0.1 and 0.2 forcefields written with the XML serialization (`.offxml`) to the SMIRNOFF 0.3 specification. These methods are called automatically when loading a serialized SMIRNOFF data representation written in the 0.1 or 0.2 specification. This functionality allows the toolkit to continue to read files containing SMIRNOFF 0.2 spec force fields, and also implements backwards-compatibility for SMIRNOFF 0.1 spec force fields.

**Warning:** The SMIRNOFF 0.1 spec did not contain fields for several energy-determining parameters that are exposed in later SMIRNOFF specs. Thus, when reading SMIRNOFF 0.1 spec data, the toolkit must make assumptions about the values that should be added for the newly-required fields. The values that are added include 1-2, 1-3 and 1-5 scaling factors, cutoffs, and long-range treatments for nonbonded interactions. Each assumption is printed as a warning during the conversion process. Please carefully review the warning messages to ensure that the conversion is providing your desired behavior.

### SMIRNOFF 0.3 specification updates

- The SMIRNOFF 0.3 spec introduces versioning for each individual parameter section, allowing asynchronous updates to the features of each parameter class. The top-level SMIRNOFF tag, containing information like `aromaticity_model`, `Author`, and `Date`, still has a version (currently 0.3). But, to allow for independent development of individual parameter types, each section (such as Bonds, Angles, etc) now has its own version as well (currently all 0.3).
- All units are now stored in expressions with their corresponding values. For example, distances are now stored as `1.526*angstrom`, instead of storing the unit separately in the section header.
- The current allowed value of the potential field for `ProperTorsions` and `ImproperTorsions` tags is no longer `charmm`, but is rather  $k*(1+\cos(\text{periodicity}*\theta-\text{phase}))$ . It was pointed out to us that CHARMM-style torsions deviate from this formula when the periodicity of a torsion term is 0, and we do not intend to reproduce that behavior.
- SMIRNOFF spec documentation has been updated with tables of keywords and their defaults for each parameter section and parameter type. These tables will track the allowed keywords and default behavior as updated versions of individual parameter sections are released.

### Performance improvements and bugfixes

- [PR #329](#): Performance improvements when creating systems for topologies with many atoms.
- [PR #347](#): Fixes bug in charge assignment that occurs when charges are read from file, and reference and charge molecules have different atom orderings.

### New features

- [PR #311](#): Several new experimental functions.
  - Adds `convert_0_2_smirnoff_to_0_3`, which takes a SMIRNOFF 0.2-spec data dict, and updates it to 0.3. This function is called automatically when creating a `ForceField` from a SMIRNOFF 0.2 spec OFFXML file.
  - Adds `convert_0_1_smirnoff_to_0_2`, which takes a SMIRNOFF 0.1-spec data dict, and updates it to 0.2. This function is called automatically when creating a `ForceField` from a SMIRNOFF 0.1 spec OFFXML file.
  - NOTE: The format of the “SMIRNOFF data dict” above is likely to change significantly in the future. Users that require a stable serialized `ForceField` object should use the output of `ForceField.to_string('XML')` instead.
  - Adds `ParameterHandler` and `ParameterType` `add_cosmetic_attribute` and `delete_cosmetic_attribute` functions. Once created, cosmetic attributes can be accessed and modified as attributes of the underlying object (eg. `ParameterType.my_cosmetic_attr = 'blue'`) These functions are experimental, and we are interested in feedback on how cosmetic attribute handling could be improved. (See [Issue #338](#)) Note that if a new cosmetic attribute is added to an object without using these functions, it will not be recognized by the toolkit and will not be written out during serialization.
  - Values for the top-level `Author` and `Date` tags are now kept during SMIRNOFF data I/O. If multiple data sources containing these fields are read, the values are concatenated using “AND” as a separator.

## API-breaking changes

- `ForceField.to_string` and `ForceField.to_file` have had the default value of their `discard_cosmetic_attributes` kwarg set to `False`.
- `ParameterHandler` and `ParameterType` constructors now expect the `version` kwarg (per the SMIRNOFF spec change above) This requirement can be skipped by providing the kwarg `skip_version_check=True`
- `ParameterHandler` and `ParameterType` functions no longer handle `X_unit` attributes in SMIRNOFF data (per the SMIRNOFF spec change above).
- The scripts in `utilities/convert_frosst` are now deprecated. This functionality is important for provenance and will be migrated to the `openforcefield/smirnoff99Frosst` repository in the coming weeks.
- `ParameterType` `._SMIRNOFF_ATTRIBS` is now `ParameterType` `._REQUIRED_SPEC_ATTRIBS`, to better parallel the structure of the `ParameterHandler` class.
- `ParameterType` `._OPTIONAL_ATTRIBS` is now `ParameterType` `._OPTIONAL_SPEC_ATTRIBS`, to better parallel the structure of the `ParameterHandler` class.
- Added class-level dictionaries `ParameterHandler` `._DEFAULT_SPEC_ATTRIBS` and `ParameterType` `._DEFAULT_SPEC_ATTRIBS`.

### 1.2.10 0.3.0 - API Improvements

Several improvements and changes to public API.

#### New features

- [PR #292](#): Implement `Topology.to_openmm` and remove `ToolkitRegistry.toolkit_is_available`
- [PR #322](#): Install directories for the lookup of OFFXML files through the entry point group `openforcefield.smirnoff_forcefield_directory`. The `ForceField` class doesn't search in the `data/forcefield/` folder anymore (now renamed `data/test_forcefields/`), but only in `data/`.

#### API-breaking Changes

- [PR #278](#): Standardize variable/method names
- [PR #291](#): Remove `ForceField.load/to_smirnoff_data`, add `ForceField.to_file/string` and `ParameterHandler.add_parameters`. Change behavior of `ForceField.register_X_handler` functions.

#### Bugfixes

- [PR #327](#): Fix units in `tip3p.offxml` (note that this file is still not loadable by current toolkit)
- [PR #325](#): Fix solvent box for provided test system to resolve periodic clashes.
- [PR #325](#): Add informative message containing Hill formula when a molecule can't be matched in `Topology.from_openmm`.
- [PR #325](#): Provide warning or error message as appropriate when a molecule is missing stereochemistry.
- [PR #316](#): Fix formatting issues in GBSA section of SMIRNOFF spec
- [PR #308](#): Cache molecule SMILES to improve system creation speed



- [PR #306](#): Allow single-atom molecules with all zero coordinates to be converted to OE/RDK mols
- [PR #313](#): Fix issue where constraints are applied twice to constrained bonds

### 1.2.11 0.2.2 - Bugfix release

This release modifies an example to show how to parameterize a solvated system, cleans up backend code, and makes several improvements to the README.

#### Bugfixes

- [PR #279](#): Cleanup of unused code/warnings in main package `__init__`
- [PR #259](#): Update T4 Lysozyme + toluene example to show how to set up solvated systems
- [PR #256](#) and [PR #274](#): Add functionality to ensure that links in READMEs resolve successfully

### 1.2.12 0.2.1 - Bugfix release

This release features various documentation fixes, minor bugfixes, and code cleanup.

#### Bugfixes

- [PR #267](#): Add neglected <ToolkitAM1BCC> documentation to the SMIRNOFF 0.2 spec
- [PR #258](#): General cleanup and removal of unused/inaccessible code.
- [PR #244](#): Improvements and typo fixes for BRD4:inhibitor benchmark

### 1.2.13 0.2.0 - Initial RDKit support

This version of the toolkit introduces many new features on the way to a 1.0.0 release.

#### New features

- Major overhaul, resulting in the creation of the [SMIRNOFF 0.2 specification](#) and its XML representation
- Updated API and infrastructure for reference SMIRNOFF ForceField implementation
- Implementation of modular ParameterHandler classes which process the topology to add all necessary forces to the system.
- Implementation of modular ParameterIOHandler classes for reading/writing different serialized SMIRNOFF forcefield representations
- Introduction of Molecule and Topology classes for representing molecules and biomolecular systems
- New ToolkitWrapper interface to RDKit, OpenEye, and AmberTools toolkits, managed by ToolkitRegistry
- API improvements to more closely follow [PEP8](#) guidelines
- Improved documentation and examples



### 1.2.14 0.1.0

This is an early preview release of the toolkit that matches the functionality described in the preprint describing the SMIRNOFF v0.1 force field format: [\[DOI\]](#).

#### New features

This release features additional documentation, code comments, and support for automated testing.

#### Bugfixes

##### Treatment of improper torsions

A significant (though currently unused) problem in handling of improper torsions was corrected. Previously, non-planar impropers did not behave correctly, as six-fold impropers have two potential chiralities. To remedy this, SMIRNOFF impropers are now implemented as three-fold impropers with consistent chirality. However, current force fields in the SMIRNOFF format had no non-planar impropers, so this change is mainly aimed at future work.

## 1.3 The SMIRks Native Open Force Field (SMIRNOFF) specification

SMIRNOFF is a specification for encoding molecular mechanics force fields from the [Open Force Field Initiative](#) based on direct chemical perception using the broadly-supported [SMARTS](#) language, utilizing atom tagging extensions from [SMIRKS](#).

### 1.3.1 Authors and acknowledgments

The SMIRNOFF specification was designed by the [Open Force Field Initiative](#).

Primary contributors include:

- Caitlin C. Bannan (University of California, Irvine) <bannanc@uci.edu>
- Christopher I. Bayly (OpenEye Software) <bayly@eyesopen.com>
- John D. Chodera (Memorial Sloan Kettering Cancer Center) <john.chodera@choderalab.org>
- David L. Mobley (University of California, Irvine) <dmobley@uci.edu>

SMIRNOFF and its reference implementation in the openforcefield toolkit was heavily inspired by the [ForceField class](#) from the [OpenMM](#) molecular simulation package, and its associated [XML format](#), developed by [Peter K. Eastman](#) (Stanford University).

### 1.3.2 Representations and encodings

A force field in the SMIRNOFF format can be encoded in multiple representations. Currently, only an [XML](#) representation is supported by the reference implementation of the [openforcefield toolkit](#).

#### XML representation

A SMIRNOFF force field can be described in an [XML](#) representation, which provides a human- and machine-readable form for encoding the parameter set and its typing rules. This document focuses on describing the XML representation of the force field.

- By convention, XML-encoded SMIRNOFF force fields use an `.offxml` extension if written to a file to prevent confusion with other file formats.
- In XML, numeric quantities appear as strings, like "1" or "2.3".
- Integers should always be written without a decimal point, such as "1", "9".
- Non-integral numbers, such as parameter values, should be written with a decimal point, such as "1.23", "2.".
- In XML, certain special characters that occur in valid SMARTS/SMIRKS patterns (such as ampersand symbols &) must be specially encoded. See [this list of XML and HTML character entity references](#) for more details.

#### Future representations: JSON, MessagePack, YAML, and TOML

We are considering supporting [JSON](#), [MessagePack](#), [YAML](#), and [TOML](#) representations as well.

### 1.3.3 Reference implementation

A reference implementation of the SMIRNOFF XML specification is provided in the [openforcefield toolkit](#).

### 1.3.4 Support for molecular simulation packages

The reference implementation currently generates parameterized molecular mechanics systems for the GPU-accelerated [OpenMM](#) molecular simulation toolkit. Parameterized systems can subsequently be converted for use in other popular molecular dynamics simulation packages (including [AMBER](#), [CHARMM](#), [NAMD](#), [Desmond](#), and [LAMMPS](#)) via [ParmEd](#) and [InterMol](#). See [the example on using SMIRNOFF in AMBER or GROMACS](#) for more details.

### 1.3.5 Basic structure

A reference implementation of a SMIRNOFF force field parser that can process XML representations (denoted by `.offxml` file extensions) can be found in the `ForceField` class of the `openforcefield.typing.engines.smirnoff` module.

Below, we describe the main structure of such an XML representation.

### The enclosing <SMIRNOFF> tag

A SMIRNOFF forcefield XML specification always is enclosed in a <SMIRNOFF> tag, with certain required attributes provided. The required and permitted attributes defined in the <SMIRNOFF> are recorded in the version attribute, which describes the top-level attributes that are expected or permitted to be defined.

```
<SMIRNOFF version="0.3" aromaticity_model="OEAroModel_MDL">
...
</SMIRNOFF>
```

### Versioning

The SMIRNOFF force field format supports versioning via the version attribute to the root <SMIRNOFF> tag, e.g.:

```
<SMIRNOFF version="0.3" aromaticity_model="OEAroModel_MDL">
...
</SMIRNOFF>
```

The version format is x.y, where x denotes the major version and y denotes the minor version. SMIRNOFF versions are guaranteed to be backward-compatible within the *same major version number series*, but it is possible major version increments will break backwards-compatibility.

SMIRNOFF tag version	Required attributes	Optional attributes
0.1	aromaticity_model	Date, Author
0.2	aromaticity_model	Date, Author
0.3	aromaticity_model	Date, Author

The SMIRNOFF tag versions describe the required and allowed force field-wide settings. The list of keywords is as follows:

### Aromaticity model

The `aromaticity_model` specifies the aromaticity model used for chemical perception (here, `OEAroModel_MDL`).

Currently, the only supported model is `OEAroModel_MDL`, which is implemented in both the RDKit and the OpenEye Toolkit.

---

**Note:** Add link to complete open specification of *OEAroModel\_MDL* aromaticity model.

---

## Metadata

Typically, date and author information is included:

```
<Date>2016-05-25</Date>  
<Author>J. D. Chodera (MSKCC) charge increment tests</Author>
```

The `<Date>` tag should conform to [ISO 8601 date formatting guidelines](#), such as 2018-07-14 or 2018-07-14T08:50:48+00:00 (UTC time).

## Parameter generators

Within the `<SMIRNOFF>` tag, top-level tags encode parameters for a force field based on a SMARTS/SMIRKS-based specification describing the chemical environment the parameters are to be applied to. The file has tags corresponding to OpenMM force terms (Bonds, Angles, ProperTorsions, etc., as discussed in more detail below); these specify functional form and other information for individual force terms.

```
<Angles version="0.3" potential="harmonic">  
  ...  
</Angles>
```

which introduces the following Angle child elements which will use a harmonic potential.

## Specifying parameters

Under each of these force terms, there are tags for individual parameter lines such as these:

```
<Angles version="0.3" potential="harmonic">  
  <Angle smirks="[a,A:1]-[#6X4:2]-[a,A:3]" angle="109.50*degree" k="100.0*kilocalorie_per_mole/  
↪radian**2"/>  
  <Angle smirks="#1:1-[#6X4:2]-[#1:3]" angle="109.50*degree" k="70.0*kilocalorie_per_mole/radian**2"/  
↪>  
</Angles>
```

The first of these specifies the `smirks` attribute as `[a,A:1]-[#6X4:2]-[a,A:3]`, specifying a SMIRKS pattern that matches three connected atoms specifying an angle. This particular SMIRKS pattern matches a tetravalent carbon at the center with single bonds to two atoms of any type. This pattern is essentially a [SMARTS](#) string with numerical atom tags commonly used in [SMIRKS](#) to identify atoms in chemically unique environments—these can be thought of as tagged regular expressions for identifying chemical environments, and atoms within those environments. Here, `[a,A]` denotes any atom—either aromatic (a) or aliphatic (A), while `[#6X4]` denotes a carbon by element number (#6) that with four substituents (X4). The symbol `-` joining these groups denotes a single bond. The strings `:1`, `:2`, and `:2` label these atoms as indices 1, 2, and 3, with 2 being the central atom. Equilibrium angles are provided as the `angle` attribute, along with force constants as the `k` attribute (with corresponding units included in the expression).

---

**Note:** The reference implementation of the SMIRNOFF specification implemented in the Open Force Field toolkit will, by default, raise an exception if an unexpected attribute is encountered. The toolkit can be configured to accept non-spec keywords, but these are considered “cosmetic” and will not be evaluated. For example, providing an `<Angle>` tag that also specifies a second force constant `k2` will result in an exception, unless the user specifies that “cosmetic” attributes should be accepted by the parser.

---

## SMIRNOFF parameter specification is hierarchical

Parameters that appear later in a SMIRNOFF specification override those which come earlier if they match the same pattern. This can be seen in the example above, where the first line provides a generic angle parameter for any tetravalent carbon (single bond) angle, and the second line overrides this for the specific case of a hydrogen-(tetravalent carbon)-hydrogen angle. This hierarchical structure means that a typical parameter file will tend to have generic parameters early in the section for each force type, with more specialized parameters assigned later.

## Multiple SMIRNOFF representations can be processed in sequence

Multiple SMIRNOFF data sources (e.g. multiple OFFXML files) can be loaded by the openforcefield ForceField in sequence. If these files each contain unique top-level tags (such as <Bonds>, <Angles>, etc.), the resulting forcefield will be independent of the order in which the files are loaded. If, however, the same tag occurs in multiple files, the contents of the tags are merged, with the tags read later taking precedence over the parameters read earlier, provided the top-level tags have compatible attributes. The resulting force field will therefore depend on the order in which parameters are read.

This behavior is intended for limited use in appending very specific parameters, such as parameters specifying solvent models, to override standard parameters.

### 1.3.6 Units

To minimize the potential for [unit conversion errors](#), SMIRNOFF forcefields explicitly specify units in a form readable to both humans and computers for all unit-bearing quantities. Allowed values for units are given in [simtk.unit](#) (though in the future this may change to the more widely-used Python [pint library](#)). For example, for the angle (equilibrium angle) and k (force constant) parameters in the <Angle> example block above, both attributes are specified as a mathematical expression

```
<Angle smirks="#1:1]-[#6X4:2]-[#1:3]" angle="109.50*degree" k="70.0*kilocalorie_per_mole/radian**2"/>
```

For more information, see the [standard OpenMM unit system](#).

### 1.3.7 SMIRNOFF independently applies parameters to each class of potential energy terms

The SMIRNOFF uses direct chemical perception to assign parameters for potential energy terms independently for each term. Rather than first applying atom typing rules and then looking up combinations of the resulting atom types for each force term, the rules for directly applying parameters to atoms is compartmentalized in separate sections. The file consists of multiple top-level tags defining individual components of the potential energy (in addition to charge models or modifiers), with each section specifying the typing rules used to assign parameters for that potential term:

```
<Bonds version="0.3" potential="harmonic">
  <Bond smirks="#6X4:1]-[#6X4:2]" length="1.526*angstrom" k="620.0*kilocalories_per_mole/angstrom**2"/>
  <Bond smirks="#6X4:1]-[#1:2]" length="1.090*angstrom" k="680.0*kilocalories_per_mole/angstrom**2"/>
  ...
</Bonds>

<Angles version="0.3" potential="harmonic">
  <Angle smirks="[a,A:1]-[#6X4:2]-[a,A:3]" angle="109.50*degree" k="100.0*kilocalories_per_mole/
  radian**2"/>
```

(continues on next page)

(continued from previous page)

```

    <Angle smirks="#1:1]-[#6X4:2]-[#1:3]" angle="109.50*degree" k="70.0*kilocalories_per_mole/radian**2
    ↪"/>
    ...
</Angles>

```

Each top-level tag specifying a class of potential energy terms has an attribute potential for specifying the functional form for the interaction. Common defaults are defined, but the goal is to eventually allow these to be overridden by alternative choices or even algebraic expressions in the future, once more molecular simulation packages support general expressions. We distinguish between functional forms available in all common molecular simulation packages (specified by keywords) and support for general functional forms available in a few packages (especially OpenMM, which supports a flexible set of custom forces defined by algebraic expressions) with an **EXPERIMENTAL** label.

Many of the specific forces are implemented as discussed in the [OpenMM Documentation](#); see especially [Section 19 on Standard Forces](#) for mathematical descriptions of these functional forms. Some top-level tags provide attributes that modify the functional form used to be consistent with packages such as AMBER or CHARMM.

### 1.3.8 Partial charge and electrostatics models

SMIRNOFF supports several approaches to specifying electrostatic models. Currently, only classical fixed point charge models are supported, but future extensions to the specification will support point multipoles, point polarizable dipoles, Drude oscillators, charge equilibration methods, and so on.

#### <LibraryCharges>: Library charges for polymeric residues and special solvent models

A mechanism is provided for specifying library charges that can be applied to molecules or residues that match provided templates. Library charges are applied first, and atoms for which library charges are applied will be excluded from alternative charging schemes listed below.

For example, to assign partial charges for a non-terminal ALA residue from the [AMBER ff14SB](#) parameter set:

```

<LibraryCharges version="0.3">
  <!-- match a non-terminal alanine residue with AMBER ff14SB partial charges -->
  <LibraryCharge name="ALA" smirks="[NX3:1]([#1:2])([#6])([#6H1:3])([#1:4])([#6:5])([#1:6])([#1:7])([#1:
  ↪8])([#6:9])([#8:10])([#7])" charge1="-0.4157*elementary_charge" charge2="0.2719*elementary_charge"
  ↪charge3="0.0337*elementary_charge" charge4="0.0823*elementary_charge" charge5="-0.1825*elementary_
  ↪charge" charge6="0.0603*elementary_charge" charge7="0.0603*elementary_charge" charge8="0.
  ↪0603*elementary_charge" charge9="0.5973*elementary_charge" charge10="-0.5679*elementary_charge"/>
  ...
</LibraryCharges>

```

In this case, a SMIRKS string defining the residue tags each atom that should receive a partial charge, with the charges specified by attributes charge1, charge2, etc. The name attribute is optional. Note that, for a given template, chemically equivalent atoms should be assigned the same charge to avoid undefined behavior. If the template matches multiple non-overlapping sets of atoms, all such matches will be assigned the provided charges. If multiple templates match the same set of atoms, the last template specified will be used.

Solvent models or excipients can also have partial charges specified via the <LibraryCharges> tag. For example, to ensure water molecules are assigned partial charges for [TIP3P](#) water, we can specify a library charge entry:

```
<LibraryCharges version="0.3">
  <!-- TIP3P water oxygen with charge override -->
  <LibraryCharge name="TIP3P" smirks="#1:1-[#8X2H2+0:2]-[#1:3]" charge1="0.417*elementary_charge"
  ↪charge2="-0.834*elementary_charge" charge3="0.417*elementary_charge"/>
</LibraryCharges>
```

LibraryCharges tag version	section	Tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3			smirks, charge (indexed)	name, id, parent_id

### <ChargeIncrementModel>: Small molecule and fragment charges

In keeping with the AMBER force field philosophy, especially as implemented in small molecule force fields such as GAFF, GAFF2, and `parm@Frosst`, partial charges for small molecules are usually assigned using a quantum chemical method (usually a semiempirical method such as AM1) and a [partial charge determination scheme](#) (such as CM2 or RESP), then subsequently corrected via charge increment rules, as in the highly successful AM1-BCC approach.

Here is an example:

```
<ChargeIncrementModel version="0.4" number_of_conformers="1" partial_charge_method="AM1-Mulliken">
  <!-- A fractional charge can be moved along a single bond -->
  <ChargeIncrement smirks="#6X4:1]-[#6X3a:2]" charge_increment1="-0.0073*elementary_charge" charge_
  ↪increment2="0.0073*elementary_charge"/>
  <ChargeIncrement smirks="#6X4:1]-[#6X3a:2]-[#7]" charge_increment1="0.0943*elementary_charge" charge_
  ↪increment2="-0.0943*elementary_charge"/>
  <!-- Alternatively, fractional charges can be redistributed among any number of bonded atoms -->
  <ChargeIncrement smirks="[N:1]([H:2])([H:3])" charge_increment1="0.02*elementary_charge" charge_
  ↪increment2="-0.01*elementary_charge" charge_increment3="-0.01*elementary_charge"/>
  <!-- As of version 0.4 of the ChargeIncrementModel tag, it is possible to define one less charge_
  ↪increment attribute than there are tagged atoms -->
  <!-- The final, undefined charge_increment will be calculated as to make the sum of the charge_
  ↪increments equal 0 -->
  <ChargeIncrement smirks="#6X4:1]-[#8:2]" charge_increment1="-0.0718*elementary_charge"/>
  <ChargeIncrement smirks="[N]-[C:1]-[C:2]-[Cl:3]" charge_increment1="-0.123" charge_increment2="0.456"
  ↪/>
</ChargeIncrementModel>
```

The sum of formal charges for the molecule or fragment will be used to determine the total charge the molecule or fragment will possess.

<ChargeIncrementModel> provides several optional attributes to control its behavior:

- The `number_of_conformers` attribute (default: "1") is used to specify how many conformers will be generated for the molecule (or capped fragment) prior to charging.
- The `partial_charge_method` attribute (default: "AM1-Mulliken") is used to specify how uncorrected partial charges are to be generated. Later additions will add restrained electrostatic potential fitting (RESP) capabilities.

The <ChargeIncrement> tags specify how the quantum chemical derived charges are to be corrected to produce the final charges. The `charge_increment#` attributes specify how much the charge on the associated tagged atom index (replacing #) should be modified.

Starting in the 0.4 version of this section, a ChargeIncrement may be specified with one less `charge_increment` value than it has tagged atoms. The missing `charge_increment` value must be that of

the highest tagged atom index. This missing `charge_increment` will be calculated to offset the sum of the other `charge_increments` in the same `ChargeIncrement` parameter to achieve a net value of 0. This allows `ChargeIncrement` parameters to be defined similar to bond charge corrections.

Note that atoms for which library charges have already been applied are excluded from charging via `<ChargeIncrementModel>`.

Future additions will provide options for intelligently fragmenting large molecules and biopolymers, as well as a capping attribute to specify how fragments with dangling bonds are to be capped to allow these groups to be charged.

ChargeIncrementModel section tag version	Tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3	<code>number_of_conformers="1",</code> <code>partial_charge_method='AM1-BCC'</code>	<code>smirks</code> , <code>charge_increment</code> (indexed, must be equal to number of tagged atoms in <code>smirks</code> )	<code>name</code> , <code>id</code> , <code>parent_id</code>
0.4	<code>number_of_conformers="1",</code> <code>partial_charge_method='AM1-BCC'</code>	<code>smirks</code> , <code>charge_increment</code> (indexed, must be equal to- or one less than- number of tagged atoms in <code>smirks</code> )	<code>name</code> , <code>id</code> , <code>parent_id</code>

#### `<ToolkitAM1BCC>`: Temporary support for toolkit-based AM1-BCC partial charges

**Warning:** This tag is not permanent and may be phased out in future versions of the spec.

This tag calculates partial charges using the default settings of the highest-priority cheminformatics toolkit that can perform [AM1-BCC charge assignment](#). Currently, if the OpenEye toolkit is licensed and available, this will use QuacPac configured to generate charges using [AM1-BCC ELF10](#) for each unique molecule in the topology. Otherwise [RDKit](#) will be used for initial conformer generation and the [AmberTools antechamber/sqm software](#) will be used for charge calculation.

If this tag is specified for a force field, conformer generation will be performed regardless of whether conformations of the input molecule were provided. If [RDKit](#)/[AmberTools](#) are used as the toolkit backend for this calculation, only the first conformer is used for AM1-BCC calculation.

The charges generated by this tag may differ depending on which toolkits are available.

Note that atoms for which prespecified or library charges have already been applied are excluded from charging via `<ToolkitAM1BCC>`.

#### Prespecified charges (reference implementation only)

In our reference implementation of SMIRNOFF in the openforcefield toolkit, we also provide a method for specifying user-defined partial charges during system creation. This functionality is accessed by using the `charge_from_molecules` optional argument during system creation, such as in `ForceField.create_openmm_system(topology, charge_from_molecules=molecule_list)`. When this optional keyword is provided, all matching molecules will have their charges set by the entries in `molecule_list`. This method is provided solely for convenience in developing and exploring alternative charging schemes; actual force field releases for distribution will use one of the other mechanisms specified above.



### 1.3.9 Parameter sections

A SMIRNOFF force field consists of one or more force field term definition sections. For the most part, these sections independently define how a specific component of the potential energy function for a molecular system is supposed to be computed (such as bond stretch energies, or Lennard-Jones interactions), as well as how parameters are to be assigned for this particular term. Each parameter section contains a version, which encodes the behavior of the section, as well as the required and optional attributes the top-level tag and SMIRKS-based parameters. This decoupling of how parameters are assigned for each term provides a great deal of flexibility in composing new force fields while allowing a minimal number of parameters to be used to achieve accurate modeling of intramolecular forces.

Below, we describe the specification for each force field term definition using the XML representation of a SMIRNOFF force field.

As an example of a complete SMIRNOFF force field specification, see [a recent force field in the “Parsley” line \(openff-1.2.0.offxml\)](#).

**Note:** Not all parameter sections *must* be specified in a SMIRNOFF force field. A wide variety of force field terms are provided in the specification, but a particular force field only needs to define a subset of those terms.

<vdW>

van der Waals force parameters, which include repulsive forces arising from Pauli exclusion and attractive forces arising from dispersion, are specified via the <vdW> tag with sub-tags for individual Atom entries, such as:

```
<vdW version="0.3" potential="Lennard-Jones-12-6" combining_rules="Lorentz-Berthelot" scale12="0.0"
scale13="0.0" scale14="0.5" scale15="1.0" switch_width="8.0*angstrom" cutoff="9.0*angstrom" long_
range_dispersion="isotropic">
  <Atom smirks="#1:1" sigma="1.4870*angstrom" epsilon="0.0157*kilocalories_per_mole"/>
  <Atom smirks="#1:1-#6" sigma="1.4870*angstrom" epsilon="0.0157*kilocalories_per_mole"/>
  ...
</vdW>
```

For standard Lennard-Jones 12-6 potentials (specified via potential="Lennard-Jones-12-6"), the epsilon parameter denotes the well depth, while the size property can be specified either via providing the sigma attribute, such as sigma="1.3\*angstrom", or via the r<sub>0</sub>/2 (r<sub>min</sub>/2) values used in AMBER force fields (here denoted r<sub>min\_half</sub> as in the example above). The two are related by  $r_0 = 2^{(1/6)} * \sigma$  and conversion is done internally in ForceField into the sigma values used in OpenMM.

Attributes in the <vdW> tag specify the scaling terms applied to the energies of 1-2 (scale12, default: 0), 1-3 (scale13, default: 0), 1-4 (scale14, default: 0.5), and 1-5 (scale15, default: 1.0) interactions, as well as the distance at which a switching function is applied (switch\_width, default: "1.0\*angstrom"), the cutoff (cutoff, default: "9.0\*angstroms"), and long-range dispersion treatment scheme (long\_range\_dispersion, default: "isotropic").

The potential attribute (default: "none") specifies the potential energy function to use. Currently, only potential="Lennard-Jones-12-6" is supported:

$$U(r) = 4 * \epsilon * ((\sigma/r)^{12} - (\sigma/r)^6)$$

The combining\_rules attribute (default: "none") currently only supports "Lorentz-Berthelot", which specifies the geometric mean of epsilon and arithmetic mean of sigma. Support for [other Lennard-](#)

Jones mixing schemes will be added later: Waldman-Hagler, Fender-Halsey, Kong, Tang-Toennies, Pena, Hudson-McCoubrey, Sikora.

Later revisions will add support for additional potential types (e.g., Buckingham-exp-6), as well as the ability to support arbitrary algebraic functional forms using a scheme such as

```
<vdW version="0.3" potential="4*epsilon*((sigma/r)^12-(sigma/r)^6)" scale12="0.0" scale13="0.0" scale14=
↪ "0.5" scale15="1" switch_width="8.0*angstrom" cutoff="9.0*angstrom" long_range_dispersion="isotropic">
  <CombiningRules>
    <CombiningRule parameter="sigma" function="(sigma1+sigma2)/2"/>
    <CombiningRule parameter="epsilon" function="sqrt(epsilon1*epsilon2)"/>
  </CombiningRules>
  <Atom smirks="#1:1" sigma="1.4870*angstrom" epsilon="0.0157*kilocalories_per_mole"/>
  <Atom smirks="#1:1]-[#6]" sigma="1.4870*angstrom" epsilon="0.0157*kilocalories_per_mole"/>
  ...
</vdW>
```

If the <CombiningRules> tag is provided, it overrides the combining\_rules attribute.

Later revisions will also provide support for special interactions using the <AtomPair> tag:

```
<vdW version="0.3" potential="Lennard-Jones-12-6" combining_rules="Lorentz-Berthelot" scale12="0.0"
↪ scale13="0.0" scale14="0.5" scale15="1">
  <AtomPair smirks1="#1:1" smirks2="#6:2" sigma="1.4870*angstrom" epsilon="0.0157*kilocalories_per_
↪ mole"/>
  ...
</vdW>
```

vdW section tag version	Tag attributes and default values	Required parameter attributes	Optional param- eter at- tributes
0.3	potential="Lennard-Jones-12-6, "Lorentz-Berthelot", scale12="0", scale13="0", scale14="0.5", scale15="1.0", cutoff="9.0*angstrom", switch_width="1. 0*angstrom", method="cutoff"	smirks, epsilon, (sigma OR rmin_half)	id, parent_id

## <Electrostatics>

Electrostatic interactions are specified via the <Electrostatics> tag.

```
<Electrostatics version="0.3" method="PME" scale12="0.0" scale13="0.0" scale14="0.833333" scale15="1.0"/
↪ >
```

The method attribute specifies the manner in which electrostatic interactions are to be computed:

- PME - particle mesh Ewald should be used (DEFAULT); can only apply to periodic systems
- reaction-field - reaction-field electrostatics should be used; can only apply to periodic systems
- Coulomb - direct Coulomb interactions (with no reaction-field attenuation) should be used

The interaction scaling parameters applied to atoms connected by a few bonds are

- scale12 (default: 0) specifies the scaling applied to 1-2 bonds
- scale13 (default: 0) specifies the scaling applied to 1-3 bonds
- scale14 (default: 0.833333) specifies the scaling applied to 1-4 bonds

- `scale15` (default: 1.0) specifies the scaling applied to 1-5 bonds

Currently, no child tags are used because the charge model is specified via different means (currently library charges or BCCs).

For methods where the cutoff is not simply an implementation detail but determines the potential energy of the system (reaction-field and Coulomb), the cutoff distance must also be specified, and a `switch_width` if a switching function is to be used.

Electrostatics section tag version	Tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3	<code>scale12="0", scale13="0", scale14="0.833333", scale15="1.0", cutoff="9.0*angstrom", switch_width="0*angstrom", method="PME"</code>	N/A	N/A

### <Bonds>

Bond parameters are specified via a `<Bonds>...</Bonds>` block, with individual `<Bond>` tags containing attributes specifying the equilibrium bond length (`length`) and force constant (`k`) values for specific bonds. For example:

```
<Bonds version="0.3" potential="harmonic">
  <Bond smirks="#6X4:1]-[#6X4:2]" length="1.526*angstrom" k="620.0*kilocalories_per_mole/angstrom**2"/>
  <Bond smirks="#6X4:1]-[#1:2]" length="1.090*angstrom" k="680.0*kilocalories_per_mole/angstrom**2"/>
  ...
</Bonds>
```

Currently, only `potential="harmonic"` is supported, where we utilize the standard harmonic functional form:

$$U(r) = (k/2) * (r - \text{length})^2$$

Later revisions will add support for additional potential types and the ability to support arbitrary algebraic functional forms. If the potential attribute is omitted, it defaults to harmonic.

**Note that AMBER and CHARMM define a modified functional form**, such that  $U(r) = k * (r - \text{length})^2$ , so that force constants would need to be multiplied by two in order to be used in the SMIRNOFF format.

Constrained bonds are handled by a separate `<Constraints>` tag, which can either specify constraint distances or draw them from equilibrium distances specified in `<Bonds>`.

### Fractional bond orders

Fractional bond orders can be used to allow interpolation of bond parameters. For example, these parameters:

```
<Bonds version="0.3" potential="harmonic">
  <Bond smirks="#6X3:1]-[#6X3:2]" k="820.0*kilocalories_per_mole/angstrom**2" length="1.45*angstrom"/>
  <Bond smirks="#6X3:1]:[#6X3:2]" k="938.0*kilocalories_per_mole/angstrom**2" length="1.40*angstrom"/>
  <Bond smirks="#6X3:1]=[#6X3:2]" k="1098.0*kilocalories_per_mole/angstrom**2" length="1.35*angstrom"/>
  ...
</Bonds>
```

can be replaced by a single parameter line by first invoking the `fractional_bondorder_method` attribute to specify a method for computing the fractional bond order and `fractional_bondorder_interpolation` for specifying the procedure for interpolating parameters between specified integral bond orders:

```
<Bonds version="0.3" potential="harmonic" fractional_bondorder_method="AM1-Wiberg" fractional_bondorder_
↪interpolation="linear">
  <Bond smirks="#6X3:1!#6X3:2" k_bondorder1="820.0*kilocalories_per_mole/angstrom**2" k_
↪bondorder2="1098*kilocalories_per_mole/angstrom**2" length_bondorder1="1.45*angstrom" length_
↪bondorder2="1.35*angstrom"/>
  ...
```

This allows specification of force constants and lengths for bond orders 1 and 2, and then interpolation between those based on the partial bond order.

- `fractional_bondorder_method` defaults to AM1-Wiberg.
- `fractional_bondorder_interpolation` defaults to linear, which is the only supported scheme for now.

Bonds section tag version	Tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3	<code>potential="harmonic", fractional_bondorder_method="none", fractional_bondorder_interpolation="linear"</code>	smirks, length, k	id, parent_id
0.4	<code>potential="(k/2)*(r-length)^2", fractional_bondorder_method="AM1-Wiberg", fractional_bondorder_interpolation="linear"</code>	smirks, length, k	id, parent_id

## <Angles>

Angle parameters are specified via an `<Angles>...</Angles>` block, with individual `<Angle>` tags containing attributes specifying the equilibrium angle (`angle`) and force constant (`k`), as in this example:

```
<Angles version="0.3" potential="harmonic">
  <Angle smirks="[a,A:1]-[#6X4:2]-[a,A:3]" angle="109.50*degree" k="100.0*kilocalories_per_mole/
↪radian**2"/>
  <Angle smirks="#1:1]-[#6X4:2]-[#1:3]" angle="109.50*degree" k="70.0*kilocalories_per_mole/radian**2
↪"/>
  ...
</Angles>
```

Currently, only `potential="harmonic"` is supported, where we utilize the standard harmonic functional form:

$$U(r) = (k/2) * (\text{theta} - \text{angle})^2$$

Later revisions will add support for additional potential types and the ability to support arbitrary algebraic functional forms. If the potential attribute is omitted, it defaults to harmonic.

**Note that AMBER and CHARMM define a modified functional form**, such that  $U(r) = k * (\text{theta} - \text{angle})^2$ , so that force constants would need to be multiplied by two in order to be used in the SMIRNOFF format.

Angles section tag version	Tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3	<code>potential="harmonic"</code>	smirks, angle, k	id, parent_id

## <ProperTorsions>

Proper torsions are specified via a <ProperTorsions>...</ProperTorsions> block, with individual <Proper> tags containing attributes specifying the periodicity (periodicity#), phase (phase#), and barrier height (k#).

```
<ProperTorsions version="0.3" potential="k*(1+cos(periodicity*theta-phase))">
  <Proper smirks="[a,A:1]-[#6X4:2]-[#6X4:3]-[a,A:4]" idivf1="9" periodicity1="3" phase1="0.0*degree"
  ↪k1="1.40*kilocalories_per_mole"/>
  <Proper smirks="[#6X4:1]-[#6X4:2]-[#8X2:3]-[#6X4:4]" idivf1="1" periodicity1="3" phase1="0.0*degree"
  ↪k1="0.383*kilocalories_per_mole" idivf2="1" periodicity2="2" phase2="180.0*degree" k2="0.
  ↪1*kilocalories_per_mole"/>
  ...
</ProperTorsions>
```

Here, child Proper tags specify at least k1, phase1, and periodicity1 attributes for the corresponding parameters of the first force term applied to this torsion. However, additional values are allowed in the form k#, phase#, and periodicity#, where all # values must be consecutive (e.g., it is impermissible to specify k1 and k3 values without a k2 value) but # can go as high as necessary.

For convenience, an optional attribute specifies a torsion multiplicity by which the barrier height should be divided (idivf#). The default behavior of this attribute can be controlled by the top-level attribute default\_idivf (default: "auto") for <ProperTorsions>, which can be an integer (such as "1") controlling the value of idivf if not specified or "auto" if the barrier height should be divided by the number of torsions impinging on the central bond. For example:

```
<ProperTorsions version="0.3" potential="k*(1+cos(periodicity*theta-phase))" default_idivf="auto">
  <Proper smirks="[a,A:1]-[#6X4:2]-[#6X4:3]-[a,A:4]" periodicity1="3" phase1="0.0*degree" k1="1.
  ↪40*kilocalories_per_mole"/>
  ...
</ProperTorsions>
```

Currently, only potential="k\*(1+cos(periodicity\*theta-phase))" is supported, where we utilize the functional form:

$$U = \sum_{i=1}^N k_i * (1 + \cos(\text{periodicity}_i * \phi - \text{phase}_i))$$

**Note:** AMBER defines a modified functional form, such that  $U = \sum_{i=1}^N (k_i/2) * (1 + \cos(\text{periodicity}_i * \phi - \text{phase}_i))$ , so that barrier heights would need to be divided by two in order to be used in the SMIRNOFF format.

If the potential attribute is omitted, it defaults to  $k*(1+\cos(\text{periodicity}*\theta-\text{phase}))$ .

## Fractional torsion bond orders

Fractional torsion bond orders can be used to allow interpolation and extrapolation of torsion parameters. This is similar to the functionality provided by fractional bond orders detailed above. For example, these parameters:

```
<ProperTorsions version="0.3" potential="k*(1+cos(periodicity*theta-phase))" default_idivf="auto">
  <Proper smirks="[*:1]:[#6X4:2]-[#6X4:3]:[*:4]" periodicity1="2" phase1="0.0 * degree" k1="1.
  ↪00*kilocalories_per_mole" idivf1="1.0"/>
  <Proper smirks="[*:1]:[#6X4:2]=[#6X4:3]:[*:4]" periodicity1="2" phase1="0.0 * degree" k1="1.
  ↪80*kilocalories_per_mole" idivf1="1.0"/>
  ...
```

can be replaced by a single parameter line by first defining the `fractional_bondorder_method` header-level attribute to specify a method for computing the fractional bond order and `fractional_bondorder_interpolation` for specifying the procedure for interpolating parameters between specified integer bond orders:

```
<ProperTorsions version="0.3" potential="k*(1+cos(periodicity*theta-phase))" default_idivf="auto"
fractional_bondorder_method="AM1-Wiberg" fractional_bondorder_interpolation="linear">
  <Proper smirks="[*:1]:[#6X4:2]~[#6X4:3]:[*:4]" periodicity1="2" phase1="0.0 * degree" k1_bondorder1=
    "1.00*kilocalories_per_mole" k1_bondorder2="1.80*kilocalories_per_mole" idivf1="1.0"/>
  ...
```

This allows specification of the barrier height for e.g. bond orders 1 and 2 (single and double bonds), and then interpolation between those based on the partial/fractional bond order. Note that in actual usage partial/fractional bond order may never be exactly 1 or 2, or perhaps even near 2; these values only serve to define the slope of the line used for interpolation. In the example above, we replaced the two proper torsion terms (one single central bond (-) and one double central bond (=) with a single term giving the barrier heights for bond order 1 and 2. If there are cases where the fractional bond order is 1.5, this can correspond to e.g. an aromatic bond. When barrier heights for more than two integer bond orders are specified, (say, 1, 2, and 3), the interpolation lines are drawn between successive points as a piecewise linear function.

Cases in which the fractional bond order for the central bond is outside of the bond orders specified (e.g. 1 and 2 above), the barrier height `k#` is *extrapolated* using the same slope of the line used for interpolation. This works even when barrier heights for more than two integer bond orders are specified (say, 1, 2, and 3), in which case the piecewise linear extrapolation beyond the bounds uses the slope of the line defined by the nearest two bond orders. In other words, a fractional bond order of 3.2 would yield an interpolated `k#` value determined by the interpolation line between `k#_bondorder2` and `k#_bondorder3`. A fractional bond order of .9 would yield an interpolated `k#` value determined by the interpolation line between `k#_bondorder1` and `k#_bondorder2`.

Some key usage points:

- `fractional_bondorder_method` defaults to AM1-Wiberg.
- `fractional_bondorder_interpolation` defaults to linear, which is the only supported scheme for now.

Proper-Torsions section tag version	Tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3	<code>potential="k*(1+cos(periodicity*theta-phase))",</code> <code>default_idivf="auto"</code>	<code>smirks,</code> <code>k,</code> <code>phase,</code> <code>periodicity</code>	<code>idivf, id,</code> <code>parent_id</code>
0.4	<code>potential="k*(1+cos(periodicity*theta-phase))",</code> <code>default_idivf="auto",</code> <code>fractional_bondorder_method="AM1-Wiberg",</code> <code>fractional_bondorder_interpolation="linear"</code>	<code>smirks, (k OR</code> <code>k_bondorder),</code> <code>phase,</code> <code>periodicity</code>	<code>idivf, id,</code> <code>parent_id</code>

### <ImproperTorsions>

Improper torsions are specified via an <ImproperTorsions>...</ImproperTorsions> block, with individual <Improper> tags containing attributes that specify the same properties as <ProperTorsions>:

```
<ImproperTorsions version="0.3" potential="k*(1+cos(periodicity*theta-phase))">
  <Improper smirks="[*:1]~[#6X3:2](=[#7X2,#7X3+1:3])~[#7:4]" k1="10.5kilocalories_per_mole"
  ↪periodicity1="2" phase1="180.*degree"/>
  ...
</ImproperTorsions>
```

Currently, only potential="charmm" is supported, where we utilize the functional form:

$$U = \sum_{i=1}^N k_i * (1 + \cos(\text{periodicity}_i * \phi_i - \text{phase}_i))$$

**Note:** AMBER defines a modified functional form, such that  $U = \sum_{i=1}^N (k_i/2) * (1 + \cos(\text{periodicity}_i * \phi_i - \text{phase}_i))$ , so that barrier heights would need to be divided by two in order to be used in the SMIRNOFF format.

If the potential attribute is omitted, it defaults to charmm.

The improper torsion energy is computed as the average over all three impropers (all with the same handedness) in a [trefoil](#). This avoids the dependence on arbitrary atom orderings that occur in more traditional typing engines such as those used in AMBER. The *second* atom in an improper (in the example above, the trivalent carbon) is the central atom in the trefoil.

ImproperTorsions section tag version	Tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3	potential="k*(1+cos(periodicity*theta-phase))", default_idivf="auto"	k, k1, phase, periodicity	idivf, id, parent_id

### <GBSA>

**Warning:** The current release of ParmEd can not transfer GBSA models produced by the Open Force Field Toolkit to other simulation packages. These GBSA forces are currently only computable using OpenMM.

Generalized-Born surface area (GBSA) implicit solvent parameters are optionally specified via a <GBSA>...</GBSA> using <Atom> tags with GBSA model specific attributes:

```
<GBSA version="0.3" gb_model="OBC1" solvent_dielectric="78.5" solute_dielectric="1" sa_model="ACE"
↪surface_area_penalty="5.4*calories/mole/angstroms**2" solvent_radius="1.4*angstroms">
  <Atom smirks="[*:1]" radius="0.15*nanometer" scale="0.8"/>
  <Atom smirks="[#1:1]" radius="0.12*nanometer" scale="0.85"/>
  <Atom smirks="[#1:1]~[#7]" radius="0.13*nanometer" scale="0.85"/>
  <Atom smirks="[#6:1]" radius="0.17*nanometer" scale="0.72"/>
  <Atom smirks="[#7:1]" radius="0.155*nanometer" scale="0.79"/>
  <Atom smirks="[#8:1]" radius="0.15*nanometer" scale="0.85"/>
  <Atom smirks="[#9:1]" radius="0.15*nanometer" scale="0.88"/>
  <Atom smirks="[#14:1]" radius="0.21*nanometer" scale="0.8"/>
  <Atom smirks="[#15:1]" radius="0.185*nanometer" scale="0.86"/>
```

(continues on next page)



(continued from previous page)

```

<Atom smirks="#16:1" radius="0.18*nanometer" scale="0.96"/>
<Atom smirks="#17:1" radius="0.17*nanometer" scale="0.8"/>
</GBSA>

```

## Supported Generalized Born (GB) models

In the <GBSA> tag, `gb_model` selects which GB model is used. Currently, this can be selected from a subset of the GBSA models available in OpenMM:

- HCT : [Hawkins-Cramer-Truhlar](#) (corresponding to `igb=1` in AMBER): requires parameters [`radius`, `scale`]
- OBC1 : [Onufriev-Bashford-Case](#) using the GB(OBC)I parameters (corresponding to `igb=2` in AMBER): requires parameters [`radius`, `scale`]
- OBC2 : [Onufriev-Bashford-Case](#) using the GB(OBC)II parameters (corresponding to `igb=5` in AMBER): requires parameters [`radius`, `scale`]

If the `gb_model` attribute is omitted, it defaults to OBC1.

The attributes `solvent_dielectric` and `solute_dielectric` specify solvent and solute dielectric constants used by the GB model. In this example, `radius` and `scale` are per-particle parameters of the OBC1 GB model supported by OpenMM.

## Surface area (SA) penalty model

The `sa_model` attribute specifies the solvent-accessible surface area model (“SA” part of GBSA) if one should be included; if omitted, no SA term is included.

Currently, only the [analytical continuum electrostatics \(ACE\) model](#), designated ACE, can be specified, but there are plans to add more models in the future, such as the Gaussian solvation energy component of [EEF1](#). If `sa_model` is not specified, it defaults to ACE.

The ACE model permits two additional parameters to be specified:

- The `surface_area_penalty` attribute specifies the surface area penalty for the ACE model. (Default: 5.4 calories/mole/angstrom\*\*2)
- The `solvent_radius` attribute specifies the solvent radius. (Default: 1.4 angstroms)

GBSA section tag version	Tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3	<code>gb_model="OBC1",</code> <code>solvent_dielectric="78.5",</code> <code>solute_dielectric="1",</code> <code>sa_model="ACE",</code> <code>surface_area_penalty="5.4*calories/mole/angstrom**2",</code> <code>solvent_radius="1.4*angstrom"</code>	<code>smirks</code> , <code>radius</code> , <code>scale</code>	<code>id</code> , <code>parent_id</code>



## <Constraints>

Bond length or angle constraints can be specified through a <Constraints> block, which can constrain bonds to their equilibrium lengths or specify an interatomic constraint distance. Two atoms must be tagged in the smirks attribute of each <Constraint> record.

To constrain the separation between two atoms to their equilibrium bond length, it is critical that a <Bonds> record be specified for those atoms:

```
<Constraints version="0.3" >
  <!-- constrain all bonds to hydrogen to their equilibrium bond length -->
  <Constraint smirks="#1:1]-[*:2]" />
</Constraints>
```

Note that the two atoms must be bonded in the specified Topology for the equilibrium bond length to be used.

To specify the constraint distance, or constrain two atoms that are not directly bonded (such as the hydrogens in rigid water models), specify the distance attribute (and optional distance\_unit attribute for the <Constraints> tag):

```
<Constraints version="0.3">
  <!-- constrain water O-H bond to equilibrium bond length (overrides earlier constraint) -->
  <Constraint smirks="#1:1]-[#8X2H2:2]-[#1]" distance="0.9572*angstrom"/>
  <!-- constrain water H...H, calculating equilibrium length from H-O-H equilibrium angle and H-O-
  equilibrium bond lengths -->
  <Constraint smirks="#1:1]-[#8X2H2]-[#1:2]" distance="1.8532*angstrom"/>
</Constraints>
```

Typical molecular simulation practice is to constrain all bonds to hydrogen to their equilibrium bond lengths and enforce rigid TIP3P geometry on water molecules:

```
<Constraints version="0.3">
  <!-- constrain all bonds to hydrogen to their equilibrium bond length -->
  <Constraint smirks="#1:1]-[*:2]" />
  <!-- TIP3P rigid water -->
  <Constraint smirks="#1:1]-[#8X2H2:2]-[#1]" distance="0.9572*angstrom"/>
  <Constraint smirks="#1:1]-[#8X2H2]-[#1:2]" distance="1.8532*angstrom"/>
</Constraints>
```

Constraint section tag version	Required tag attributes and default values	Required parameter attributes	Optional parameter attributes
0.3		smirks	distance


### 1.3.10 Advanced features

Standard usage is expected to rely primarily on the features documented above and potentially new features. However, some advanced features will also be supported.


**<VirtualSites>: Virtual sites for off-atom charges**

We will implement experimental support for placement of off-atom (off-center) charges in a variety of contexts which may be chemically important in order to allow easy exploration of when these will be warranted. We will support the following different types or geometries of off-center charges (as diagrammed below):


- **BondCharge:** This supports placement of a virtual site  $S$  along a vector between two specified atoms, e.g. to allow for a sigma hole for halogens or similar contexts. With positive values of the distance, the virtual site lies outside the first indexed atom (green in this image).

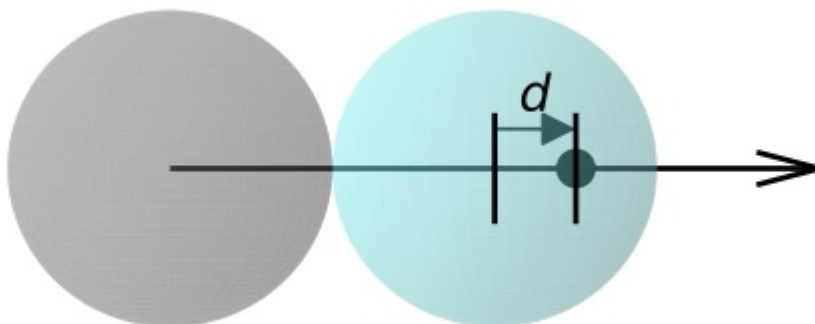


- **MonovalentLonePair:** This is originally intended for situations like a carbonyl, and allows placement of a virtual site  $S$  at a specified distance  $d$ , `inPlaneAngle` (theta 1 in the diagram), and `outOfPlaneAngle` (theta 2 in the diagram) relative to a central atom and two connected atoms.

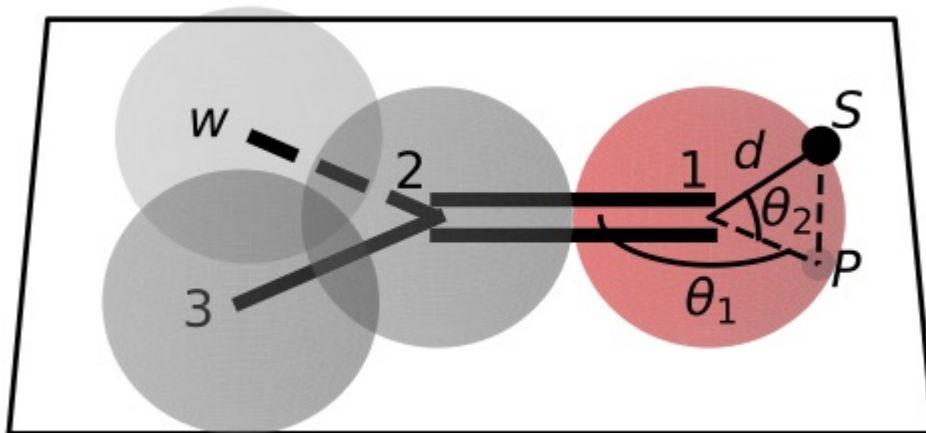

- **DivalentLonePair:** This is suitable for cases like four-point and five-point water models as well as pyrimidine; a charge site  $S$  lies a specified distance  $d$  from the central atom among three atoms (blue) along the bisector of the angle between the atoms (if `outOfPlaneAngle` is zero) or out of the plane by the specified angle (if `outOfPlaneAngle` is nonzero) with its projection along the bisector. For positive values for the distance  $d$  the virtual site lies outside the 2-1-3 angle and for negative values it lies inside.

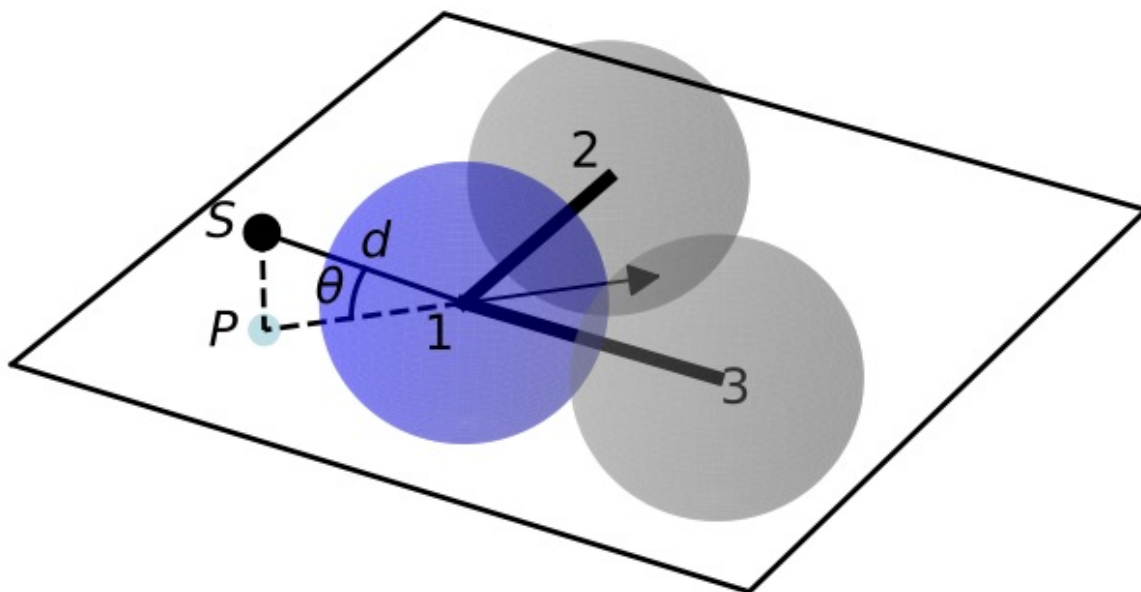

- **TrivalentLonePair:** This is suitable for planar or tetrahedral nitrogen lone pairs; a charge site  $S$  lies above the central atom (e.g. nitrogen, blue) a distance  $d$  along the vector perpendicular to the plane of the three connected atoms (2,3,4). With positive values of  $d$  the site lies above the nitrogen and with negative values it lies below the nitrogen.

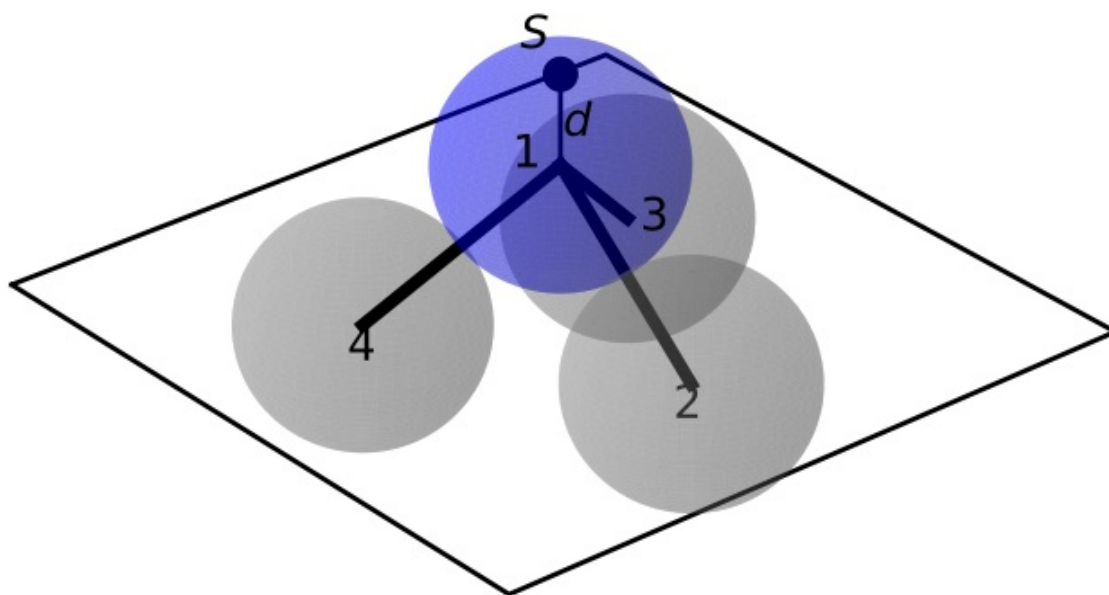

Each virtual site receives charge which is transferred from the desired atoms specified in the SMIRKS pattern via a `charge_increment#` parameter, e.g., if `charge_increment1=0.1*elementary_charge` then the virtual site will receive a charge of -0.1 and the atom labeled 1 will have its charge adjusted upwards by 0.1.  $N$  may index any indexed atom. Additionally, each virtual site can bear Lennard-Jones parameters, specified by `sigma` and `epsilon` or `rmin_half` and `epsilon`. If unspecified these default to zero.

In the SMIRNOFF format, these are encoded as:

```

<VirtualSites version="0.3" exclusion_policy="parents">
  <!-- sigma hole for halogens: "distance" denotes distance along the 2->1 bond vector, measured from
  atom 2 -->
  <!-- Specify that 0.2 charge from atom 1 and 0.1 charge units from atom 2 are to be moved to the
  virtual site, and a small Lennard-Jones site is to be added (sigma=0.1*angstrom, epsilon=0.05*kcal/
  mol) -->
  <VirtualSite type="BondCharge" smirks="[C1:1]-[C:2]" distance="0.30*angstrom" charge_increment1="-0.
  2*elementary_charge" charge_increment2="-0.1*elementary_charge" sigma="0.1*angstrom" epsilon="0.
  05*kilocalories_per_mole"/>
  <!-- Charge increments can extend out to as many atoms as are labeled, e.g. with a third atom: -->
  <VirtualSite type="BondCharge" smirks="[C1:1]-[C:2]~[*:3]" distance="0.30*angstrom" charge_increment1=
  "-0.1*elementary_charge" charge_increment2="-0.1*elementary_charge" charge_increment3="-0.
  05*elementary_charge" sigma="0.1*angstrom" epsilon="0.05*kilocalories_per_mole"/>
  <!-- monovalent lone pairs: carbonyl -->
  <!-- X denotes the charge site, and P denotes the projection of the charge site into the plane of 1
  and 2. -->
  <!-- inPlaneAngle is angle point P makes with 1 and 2, i.e. P-1-2 -->
  <!-- outOfPlaneAngle is angle charge site (X) makes out of the plane of 2-1-3 (and P) measured from 1
  -->
  <!-- Since unspecified here, sigma and epsilon for the virtual site default to zero -->
  <VirtualSite type="MonovalentLonePair" smirks="[O:1]=[C:2]~[*:3]" distance="0.30*angstrom"
  outOfPlaneAngle="0*degree" inPlaneAngle="120*degree" charge_increment1="0.2*elementary_charge" charge_
  increment2="0.2*elementary_charge" charge_increment3="0.2*elementary_charge"/>
  <!-- divalent lone pair: pyrimidine, TIP4P, TIP5P -->
  <!-- The atoms 2-1-3 define the X-Y plane, with Z perpendicular. If outOfPlaneAngle is 0, the charge
  site is a specified distance along the in-plane vector which bisects the angle left by taking 360
  degrees minus angle(2,1,3). If outOfPlaneAngle is nonzero, the charge sites lie out of the plane by
  the specified angle (at the specified distance) and their in-plane projection lines along the angle's
  bisector. -->
  <VirtualSite type="DivalentLonePair" smirks="[*:2]~[#7X2:1]~[*:3]" distance="0.30*angstrom"
  outOfPlaneAngle="0.0*degree" charge_increment1="0.1*elementary_charge" charge_increment2="0.
  2*elementary_charge" charge_increment3="0.2*elementary_charge"/>
  <!-- trivalent nitrogen lone pair -->
  <!-- charge sites lie above and below the nitrogen at specified distances from the nitrogen, along
  the vector perpendicular to the plane of (2,3,4) that passes through the nitrogen. If the nitrogen is
  co-planar with the connected atom, charge sites are simply above and below the plane -->
  <!-- Positive and negative values refer to above or below the nitrogen as measured relative to the
  plane of (2,3,4), i.e. below the nitrogen means nearer the 2,3,4 plane unless they are co-planar -->
  <!-- To ensure that the second site does not overwrite the first, specify a unique name for each. -->
  <VirtualSite type="TrivalentLonePair" smirks="[*:2]~[#7X3:1](~[*:4])~[*:3]" name="A" distance="0.
  30*angstrom" charge_increment1="0.1*elementary_charge" charge_increment2="0.2*elementary_charge"
  charge_increment3="0.2*elementary_charge" charge_increment4="0.2*elementary_charge"/>
  <VirtualSite type="TrivalentLonePair" smirks="[*:2]~[#7X3:1](~[*:4])~[*:3]" name="B" distance="-0.
  30*angstrom" charge_increment1="0.1*elementary_charge" charge_increment2="0.2*elementary_charge"
  charge_increment3="0.2*elementary_charge" charge_increment4="0.2*elementary_charge"/>
</VirtualSites>

```

Virtual-Sites section tag version	Tag attributes and default values	Required parameter attributes and default values	Optional parameter attributes
0.3	exclusionPolicy="parents"	type, distance, charge_increment (indexed), inPlaneAngle IF type="MonovalentLonePair", outOfPlaneAngle IF type="MonovalentLonePair OR type="DivalentLonePair", sigma=0.*angstrom, epsilon=0.*kilocalories_per_mole, name="EP", match="all_permutations" IF type="BondCharge OR type="MonovalentLonePair OR type="DivalentLonePair", match="once" IF type="TrivalentLonePair	N/A

### Aromaticity models

Before conducting SMIRKS substructure searches, molecules are prepared using one of the supported aromaticity models, which must be specified with the `aromaticity_model` attribute. The only aromaticity model currently widely supported (by both the [OpenEye toolkit](#) and [RDKit](#)) is the `OEArModel_MDL` model.

### Additional plans for future development

See the [openforcefield GitHub issue tracker](#) to propose changes to this specification, or read through proposed changes currently being discussed.

### 1.3.11 The openforcefield reference implementation

A Python reference implementation of a parameterization engine implementing the SMIRNOFF force field specification can be found [online](#). This implementation can use either the free-for-academics (but commercially supported) [OpenEye toolkit](#) or the free and open source [RDKit cheminformatics toolkit](#). See the [installation instructions](#) for information on how to install this implementation and its dependencies.

### Examples

A relatively extensive set of examples is made available on the [reference implementation repository](#) under `examples/`.

### Parameterizing a system

Consider parameterizing a simple system containing a the drug imatinib.

```
# Create a molecule from a mol2 file
from openforcefield.topology import Molecule
molecule = Molecule.from_file('imatinib.mol2')

# Create a Topology specifying the system to be parameterized containing just the molecule
topology = molecule.to_topology()
```

(continues on next page)

(continued from previous page)

```
# Load the first release of the "Parsley" forcefield
from openforcefield.typing.engines.smirnoff import ForceField
forcefield = ForceField('openff-1.0.0.offxml')

# Create an OpenMM System from the topology
system = forcefield.create_openmm_system(topology)
```

See `examples/SMIRNOFF_simulation/` for an extension of this example illustrating how to simulate this molecule in the gas phase.

The topology object provided to `create_openmm_system()` can contain any number of molecules of different types, including biopolymers, ions, buffer molecules, or solvent molecules. The openforcefield toolkit provides a number of convenient methods for importing or constructing topologies given PDB files, Sybyl mol2 files, SDF files, SMILES strings, and IUPAC names; see the [toolkit documentation](#) for more information. Notably, this topology object differs from those found in `OpenMM` or `MDTraj` in that it contains information on the *chemical identity* of the molecules constituting the system, rather than this atomic elements and covalent connectivity; this additional chemical information is required for the [direct chemical perception](#) features of SMIRNOFF typing.

### Using SMIRNOFF small molecule forcefields with traditional biopolymer force fields

While SMIRNOFF format force fields can cover a wide range of biological systems, our initial focus is on general small molecule force fields, meaning that users may have considerable interest in combining SMIRNOFF small molecule parameters to systems in combination with traditional biopolymer parameters from conventional force fields, such as the AMBER family of protein/nucleic acid force fields. Thus, we provide an example of setting up a mixed protein-ligand system in `examples/using_smirnoff_with_amber_protein_forcefield`, where an AMBER family force field is used for a protein and the original “Parsley” force field (`openff-1.0.0`) for a small molecule.

### The optional `id` and `parent_id` attributes and other XML attributes

In general, additional optional XML attributes can be specified and will be ignored by `ForceField` unless they are specifically handled by the parser (and specified in this document).

One attribute we have found helpful in parameter file development is the `id` attribute for a specific parameter line, and we *recommend* that SMIRNOFF force fields utilize this as effectively a parameter serial number, such as in:

```
<Bond smirks="#6X3:1]-[#6X3:2]" id="b5" k="820.0*kilocalorie_per_mole/angstrom**2" length="1.45*angstrom"/>
```

Some functionality in `ForceField`, such as `ForceField.label_molecules`, looks for the `id` attribute. Without this attribute, there is no way to uniquely identify a specific parameter line in the XML file without referring to it by its smirks string, and since some smirks strings can become long and relatively unwieldy (especially for torsions) this provides a more human- and search-friendly way of referring to specific sets of parameters.

The `parent_id` attribute is also frequently used to denote parameters from which the current parameter is derived in some manner.

### A remark about parameter availability

ForceField will currently raise an exception if any parameters are missing where expected for your system—i.e. if a bond is assigned no parameters, an exception will be raised. However, use of generic parameters (i.e. `[*:1]~[*:2]` for a bond) in your `.offxml` will result in parameters being assigned everywhere, bypassing this exception. We recommend generics be used sparingly unless it is your intention to provide true universal generic parameters.

## 1.3.12 Version history

### 0.3

This is a backwards-incompatible update to the SMIRNOFF 0.2 draft specification. However, the Open Force Field Toolkit version accompanying this update is capable of converting 0.1 spec SMIRNOFF data to 0.2 spec, and subsequently 0.2 spec to 0.3 spec. The 0.1-to-0.2 spec conversion makes a number of assumptions about settings such as long-range nonbonded handling. Warnings are printed about each assumption that is made during this spec conversion. No mechanism to convert backwards in spec is provided.

Key changes in this version of the spec are:

- Section headers now contain individual versions, instead of relying on the `<SMIRNOFF>`-level tag.
- Section headers no longer contain `X_unit` attributes.
- All physical quantities are now written as expressions containing the appropriate units.
- The default potential for `<ProperTorsions>` and `<ImproperTorsions>` was changed from `charmm` to  $k*(1+\cos(\text{periodicity}*\theta-\text{phase}))$ , as CHARMM interprets torsion terms with periodicity 0 as having a quadratic potential, while the Open Force Field Toolkit would interpret a zero periodicity literally.

### 0.2

This is a backwards-incompatible overhaul of the SMIRNOFF 0.1 draft specification along with ForceField implementation refactor:

- Aromaticity model now defaults to `OEArModel_MDL`, and aromaticity model names drop OpenEye-specific prefixes
- Top-level tags are now required to specify units for any unit-bearing quantities to avoid the potential for mistakes from implied units.
- Potential energy component definitions were renamed to be more general:
  - `<NonbondedForce>` was renamed to `<vdW>`
  - `<HarmonicBondForce>` was renamed to `<Bonds>`
  - `<HarmonicAngleForce>` was renamed to `<Angles>`
  - `<BondChargeCorrections>` was renamed to `<ChargeIncrementModel>` and generalized to accommodate an arbitrary number of tagged atoms
  - `<GBSAForce>` was renamed to `<GBSA>`
- `<PeriodicTorsionForce>` was split into `<ProperTorsions>` and `<ImproperTorsions>`
- `<vdW>` now specifies 1-2, 1-3, 1-4, and 1-5 scaling factors via `scale12` (default: 0), `scale13` (default: 0), `scale14` (default: 0.5), and `scale15` (default 1.0) attributes. It also specifies the long-range vdW



method to use, currently supporting cutoff (default) and PME. Coulomb scaling parameters have been removed from StericsForce.

- Added the <Electrostatics> tag to separately specify 1-2, 1-3, 1-4, and 1-5 scaling factors for electrostatics, as well as the method used to compute electrostatics (PME, reaction-field, Coulomb) since this has a huge effect on the energetics of the system.
- Made it clear that <Constraint> entries do not have to be between bonded atoms.
- <VirtualSites> has been added, and the specification of charge increments harmonized with <ChargeIncrementModel>
- The potential attribute was added to most forces to allow flexibility in extending forces to additional functional forms (or algebraic expressions) in the future. potential defaults to the current recommended scheme if omitted.
- <GBSA> now has defaults specified for gb\_method and sa\_method
- Changes to how fractional bond orders are handled:
  - Use of fractional bond order is now are specified at the force tag level, rather than the root level
  - The fractional bond order method is specified via the fractional\_bondorder\_method attribute
  - The fractional bond order interpolation scheme is specified via the fractional\_bondorder\_interpolation
- Section heading names were cleaned up.
- Example was updated to reflect use of the new openforcefield.topology.Topology class
- Eliminated “Requirements” section, since it specified requirements for the software, rather than described an aspect of the SMIRNOFF specification
- Fractional bond orders are described in <Bonds>, since they currently only apply to this term.

## 0.1

Initial draft specification.

## 1.4 Examples using SMIRNOFF with the toolkit

The following examples are available in [the openforcefield toolkit repository](#). Each can be run interactively in the browser with [binder](#), without installing anything on your computer.

### 1.4.1 Index of provided examples

- [conformer\\_energies](#) - compute conformer energies of one or more small molecules using a SMIRNOFF force field
- [SMIRNOFF\\_simulation](#) - simulation of a molecule in the gas phase with the SMIRNOFF force field format
- [forcefield\\_modification](#) - modify forcefield parameters and evaluate how system energy changes
- [using\\_smirnoff\\_in\\_amber\\_or\\_gromacs](#) - convert a System generated with the Open Force Field Toolkit, which can be simulated natively with OpenMM, into AMBER prmtop/inpcrd and GROMACS top/gro input files through the ParmEd library.



- [swap\\_amber\\_parameters](#) - take a prepared AMBER protein-ligand system (prmtop and crd) along with a structure file of the ligand, and replace ligand parameters with OpenFF parameters.
- [inspect\\_assigned\\_parameters](#) - check which parameters are used in which molecules and generate parameter usage statistics.
- [using\\_smirnoff\\_with\\_amber\\_protein\\_forcefield](#) - use SMIRNOFF parameters for small molecules in combination with more conventional force fields for proteins and other components of your system (using ParmEd to combine parameterized structures)
- [check\\_dataset\\_parameter\\_coverage](#) - shows how to use the Open Force Field Toolkit to ingest a dataset of molecules, and generate a report summarizing any chemistry that can not be parameterized.
- [visualization](#) - shows how rich representation of Molecule objects work in the context of Jupyter Notebooks.

## 1.5 Developing for the toolkit

### 1.5.1 Overview

#### Introduction

This guide is written with the understanding that our contributors are NOT professional software developers, but are instead computational chemistry trainees and professionals. With this in mind, we aim to use a minimum of bleeding-edge technology and alphabet soup, and we will define any potentially unfamiliar processes or technologies the first time they are mentioned. We enforce use of certain practices (tests, formatting, coverage analysis, documentation) primarily because they are worthwhile upfront investments in the long-term sustainability of this project. The resources allocated to this project will come and go, but we hope that following these practices will ensure that minimal developer time will maintain this software far into the future.

The process of contributing to the OFF toolkit is more than just writing code. Before contributing, it is a very good idea to start a discussion on the Issue tracker about the functionality you'd like to add. This Issue will help us identify where in the codebase it should go, any overlapping efforts with other developers, and what the user experience should be. Please note that the OFF toolkit is intended to be used primarily as one piece of larger workflows, and that simplicity and reliability are two of our primary goals. Often, the cost/benefit of new features must be discussed, as a complex codebase is harder to maintain. When new functionality is added to the OFF Toolkit, it becomes our responsibility to maintain it, so it's important that we understand contributed code and are in a position to keep it up to date.

#### Philosophy

- The *core functionality* of the OFF Toolkit is to combine an Open Force Field ForceField and Topology to create an OpenMM System.
- An OpenMM System contains *everything* needed to compute the potential energy of a system, except the coordinates.
- The OFF toolkit employs a modular “plugin” architecture wherever possible, providing a standard interface for contributed features.

## Terminology

### Open Force Field Toolkit Concepts

**OFF Molecule** A graph representation of a molecule containing enough information to unambiguously parametrize it. Required data fields for an OFF Molecule are:

- atoms: element (integer), formal\_charge (integer), is\_aromatic (boolean), stereochemistry (R/S/None)
- bonds: order (integer), is\_aromatic (boolean), stereochemistry (E/Z/None)

There are several other optional attributes such as conformers and partial\_charges that may be populated in the Molecule data structure. These are considered “optional” because they are not required for system creation, however if those fields are populated, the user MAY use them to override values that would otherwise be generated during system creation.

A dictionary, `Molecule.properties` is exposed, which is a Python dict that can be populated with arbitrary data. This data should be considered cosmetic and should not affect system creation. Whenever possible, molecule serialization or format conversion should preserve this data.

**OFF System** An object that contains everything needed to calculate a molecular system’s energy, except the atomic coordinates. Note that this does not exist yet, and that OpenMM System objects are being used for this purpose right now.

**OFF Topology** An object that efficiently holds many OFF Molecule objects. The atom indexing in a Topology may differ from those of the underlying ``Molecule``s

**OFF TopologyMolecule** The efficient data structures that make up an OFF Topology. There is one TopologyMolecule for each instance of a chemical species in a Topology. However, each unique chemical species has a single OFF Molecule representing it, which may be shared by multiple TopologyMolecules. TopologyMolecules contain an atom index map, as several copies of the same chemical species in a Topology may be present with different atom orderings. This data structure allows the OFF toolkit to only parametrize each unique Molecule once, and then write a copy of the assigned parameters out for each of the Molecule in the Topology (accounting for atom indexing differences in the process).

**OFF ForceField** An object generated from an OFFXML file (or other source of SMIRNOFF data). Most information from the SMIRNOFF data source is stored in this object’s several ParameterHandler``s, however some top-level SMIRNOFF data is stored in the ``ForceField object itself.

**SMIRNOFF data** A hierarchical data structure that complies with the SMIRNOFF specification. This can be serialized in many formats, including XML (OFFXML). The subsections in a SMIRNOFF data source generally correspond to one energy term in the functional form of a force field.

**ParameterHandler** An object that has the ability to produce one component of an OpenMM System, corresponding to one subsection in a SMIRNOFF data source. Most ParameterHandler objects contain a list of ParameterType objects.

**ParameterType** An object corresponding to a single SMARTS-based parameter.

**Cosmetic attribute** Data in a SMIRNOFF data source that does not correspond to a known attribute. These have no functional effect, but several programs use the extensibility of the OFFXML format to define additional attributes for their own use, and their workflows require the OFF toolkit to process the files while retaining these keywords.

### Development Infrastructure

**CI** “Continuous integration” testing.

Services that run frequently while the code is undergoing changes, ensuring that the codebase still installs and has the intended behavior. Currently, we use a service called [Travis CI](#) for this. Every time

we make commits to the master branch of the openforcefield Github repository, a set of virtual machines that mimic brand new Linux and Mac OSX computers are created, and follow build instructions specified in the repo's `.travis.yml` file to install the toolkit. After installing the OFF toolkit and its dependencies, these virtual machines run our test suite. If the tests all pass, the build “passes” (returns a green check mark on GitHub). If all the tests for a specific change to the master branch return green, then we know that the change has not broken the toolkit's existing functionality. When proposing code changes, we ask that contributors open a Pull Request (PR) on GitHub to merge their changes into the master branch. When a pull request is open, CI will run on the latest set of proposed changes and indicate whether they are safe to merge through status checks, summarized as a green check mark or red X.

**CodeCov** Code coverage.

An extension to our testing framework that reports the fraction of our source code lines that were run during the tests. This functionality is actually the combination of several components – Travis CI runs the tests using the `pytest-cov` package, and then uploads the results to the website `codecov.io`. This analysis is re-run with each change to the master branch, and a badge showing our coverage percentage is in the project README.

**LGTM** “Looks Good To Me”.

A service that analyzes the code in our repository for simple style and formatting issues. This service assigns a letter grade to codebases, and a badge showing our LGTM report is in the project README.

**RTD** ReadTheDocs.

A service that compiles and renders the packages documentation (from the `docs/` folder). The documentation itself can be accessed from the ReadTheDocs badge in the README.

## Modular design features

There are a few areas where we've designed the toolkit with extensibility in mind. Adding functionality at these interfaces should be considerably easier than in other parts of the toolkit, and we encourage experimentation and contribution on these fronts.

**ParameterHandler** A generic base class for objects that perform parametrization for one section in a SMIRNOFF data source.

**Each ParameterHandler-derived class MUST implement:**

- `create_force(self, system, topology, **kwargs)`: takes an OpenMM System and a OpenFF Topology as input, as well as optional keyword arguments, and modifies the System to contain the appropriate parameters.
- Class-level `ParameterAttributes` and `IndexedParameterAttributes`: These correspond to the header-level attributes in a SMIRNOFF data source. For example,, the Bonds tag in the SMIRNOFF spec has an optional `fractional_bondorder_method` field, which corresponds to the line `fractional_bondorder_method = ParameterAttribute(default=None)` in the `BondHandler` class definition. The `ParameterAttribute` and `IndexedParameterAttribute` classes offer considerable flexibility for validating inputs. Defining these attributes at the class level implements the corresponding behavior in the default `__init__` function.
- Class-level `definitions` `_MAX_SUPPORTED_SECTION_VERSION` and `_MAX_SUPPORTED_SECTION_VERSION`. `ParameterHandler` versions allow us to evolve `ParameterHandler` behavior in a controlled, recorded way. Force field development is experimental by nature, and it is unlikely that the initial choice of header attributes is suitable for all use cases. Recording the “versions” of a SMIRNOFF spec tag allows us to encode the default behavior and API of a specific generation of `ParameterHandlers`, while allowing the safe addition of new attributes and behaviors.

- Each `ParameterHandler`-derived class MAY implement:
  - `known_kwargs`: Keyword arguments passed to `ForceField.create_openmm_system` are validated against the `known_kwargs` lists of each `ParameterHandler` that the `ForceField` owns. If present, these `kwargs` and their values will be passed on to the `ParameterHandler`.
  - `to_dict`: converts the `ParameterHandler` to a hierarchical dict compliant with the SMIRNOFF specification. The default implementation of this function should suffice for most developers.
  - `check_handler_compatibility`: Checks whether this `ParameterHandler` is “compatible” with another. This function is used when a `ForceField` is attempted to be constructed from *multiple* SMIRNOFF data sources, and it is necessary to check that two sections with the same tagname can be combined in a sane way. For example, if the user instructed two vdW sections to be read, but the sections defined different vdW potentials, then this function should raise an `Exception` indicating that there is no safe way to combine the parameters. The default implementation of this function should suffice for most developers.
  - `postprocess_system`: operates identically to `create_force`, but is run after each `ParameterHandler`’s `create_force` has already been called. The default implementation of this method simply does nothing, and should suffice for most developers.

## User Experience

One important aspect of how we make design decisions is by asking “who do we envision using this software, and what would they want it to do here?”. There is a wide range of possible users, from non-chemists, to students/trainees, to expert computational medicinal chemists. We have decided to build functionality intended for use by *expert medicinal chemists*, and whenever possible, add fatal errors if the toolkit risks doing the wrong thing. So, for example, if a molecule is loaded with an odd ionization state, we assume that the user has input it this way intentionally. This design philosophy invariably has tradeoffs – For example, the OFF Toolkit will give the user a hard time if they try to load a “dirty” molecule dataset, where some molecules have errors or are not described in enough detail for the toolkit to unambiguously parametrize them. If there is risk of misinterpreting the molecule (for example, bond orders being undefined or chiral centers without defined stereochemistry), the toolkit should raise an error that the user can override. In this regard we differ from RDKit, which is more permissive in the level of detail it requires when creating molecules. This makes sense for RDKit’s use cases, as several of its analyses can operate with a lower level of detail about the molecules. Often, the same design decision is the best for all types of users, and there is no need for discussion. But when we do need to make tradeoffs, “assume the user is an expert” is our guiding principle.

At the same time, we aim for “automagic” behavior whenever a decision will clearly go one way over another. System parametrization is an inherently complex topic, and the OFF toolkit would be nearly unusable if we required the user to explicitly approve every aspect of the process. For example, if a `Topology` has its `box_vectors` attribute defined, we assume that the resulting `System` should be periodic.

### 1.5.2 Setting up a development environment

1. Install the conda package manager as part of the Anaconda Distribution from [here](#)
2. Set up conda environment

```
$ # Create a conda environment with the Open Force Field toolkit and its dependencies
$ conda create --name openff-dev -c conda-forge -c omnia -c openeye openforcefield openeye-toolkits
$ conda activate openff-dev
$ # Remove (only) the toolkit and replace it with a local install
```

(continues on next page)

(continued from previous page)

```
$ conda remove --force openforcefield
$ git clone https://github.com/openforcefield/openforcefield
$ cd openforcefield
$ pip install -e .
```

3. Obtain and store Open Eye license somewhere like `~/.oe_license.txt`. Optionally store the path in environmental variable `OE_LICENSE`, i.e. using a command like `echo "export OE_LICENSE=/Users/yournamehere/.oe_license.txt" >> ~/.bashrc`

### 1.5.3 Development Process

Development of new toolkit features generally proceeds in the following stages:

- **Begin a discussion on the [GitHub issue tracker](#) to determine big-picture “what should this feature do?” and “do**
  - “... typically, for existing water models, we want to assign library charges”
- **Start identifying details of the implementation that will be clear from the outset**
  - “Create a new “special section” in the SMIRNOFF format (kind of analogous to the Bond-ChargeCorrections section) which allows SMIRKS patterns to specify use of library charges for specific groups
  - “Following #86, here’s how library charges might work: ...”
- **Create a branch or fork for development**
  - The OFF Toolkit has one unusual aspect of its CI build process, which is that certain functionality requires the OpenEye toolkits, so the builds must contain a valid OpenEye license file. An encrypted OpenEye license is present in the OFF Toolkit GitHub repository, as `oe_license.txt.enc`. Only Travis has the decryption key for this file. However, this setup poses the risk that anyone who can run Travis builds could simply print the contents of the license after decryption, which would put us in violation of our academic contract with OpenEye. For this reason, the OpenEye-dependent tests will be skipped on forks.
  - Note that creating a fork will prevent the OpenEye license from being decrypted on Travis

### 1.5.4 Contributing

We always welcome [GitHub pull requests](#). For bug fixes, major feature additions, or refactoring, please raise an issue on the [GitHub issue tracker](#) first to ensure the design will be amenable to current developer plans.

### 1.5.5 How can I become a developer?

If you would like to contribute, please post an issue on the [GitHub issue tracker](#) describing the contribution you would like to make to start a discussion.

## 1.5.6 Style guide

Development for the openforcefield toolkit conforms to the recommendations given by the [Software Development Best Practices for Computational Chemistry](#) guide.

The naming conventions of classes, functions, and variables follows [PEP8](#), consistently with the best practices guide. The naming conventions used in this library not covered by PEP8 are: - Use `file_path`, `file_name`, and `file_stem` to indicate `path/to/stem.extension`, `stem.extension`, and `stem` respectively, consistently with the variables in the standard `pathlib` library. - Use `n_x` to abbreviate “number of X” (e.g. `n_atoms`, `n_molecules`).

We place a high priority on code cleanliness and readability, even if code could be written more compactly. For example, 15-character variable names are fine. Triply nested list comprehensions are not.

The openforcefield toolkit is in the process of adopting code formatting tools (“linters”) to maintain consistent style and remove the burden of adhering to these standards by hand. Currently, two are employed: 1. [Black](#), the uncompromising code formatter, automatically formats code with a consistent style. 1. [isort](#), sorts imports

There is a step in CI that uses these tools to check for a consistent style. These checks will use the most recent versions of each linter. To ensure that changes follow these standards, you can install and run these tools locally:

```
$ conda install black isort -c conda-forge
$ black openforcefield
$ isort openforcefield
```

Anything not covered above is currently up to personal preference, but may change as new linters are added.

## 1.6 Frequently asked questions (FAQ)

### 1.6.1 Input files for applying SMIRNOFF parameters

SMIRNOFF force fields use direct chemical perception meaning that, unlike many molecular mechanics (MM) force fields, they apply parameters based on substructure searches acting directly on molecules. This creates unique opportunities and allows them to encode a great deal of chemistry quite simply, but it also means that the *starting point* for parameter assignment must be well-defined chemically, giving not just the elements and connectivity for all of the atoms of all of the components of your system, but also providing the formal charges and bond orders.

Specifically, to apply SMIRNOFF to a system, you must either:

1. Provide Open Force Field Toolkit Molecule objects corresponding to the components of your system, or
2. Provide an OpenMM Topology which includes bond orders and thus can be converted to molecules corresponding to the components of your system

Without this information, our direct chemical perception cannot be applied to your molecule, as it requires the chemical identity of the molecules in your system – that is, bond order and formal charge as well as atoms and connectivity. Unless you provide the full chemical identity in this sense, we must attempt to guess or infer the chemical identity of your molecules, which is a recipe for trouble. Different molecules can have the same chemical graph but differ in bond order and formal charge, or different resonance structures may be treated rather differently by some force fields (e.g. c1cc(ccc1c2cc[nH+]cc2)[O-] vs C1=CC(C=CC1=C2C=CNC=C2)=O, where the central bond is rotatable in one resonance structure but not in the other) even though they have identical formal charge and connectivity (chemical graph). A force field which uses the chemical identity of

molecules to assign parameters needs to know the exact chemical identity of the molecule you are intending to parameterize.

### 1.6.2 Can I use an AMBER (or GROMACS) topology/coordinate file as a starting point for applying a SMIRNOFF force field?

In a word, “no”.

Parameter files used by typical molecular dynamics simulation packages do not currently encode enough information to identify the molecules chemically present, or at least not without drawing inferences. For example, one could take a structure file and infer bond orders based on bond lengths, or attempt to infer bond orders from force constants in a parameter file. Such inference work is outside the scope of SMIRNOFF.

If you have such an inference problem, we recommend that you use pre-existing cheminformatics tools available elsewhere (such as via the OpenEye toolkits, such as the `OEPerceiveBondOrders` functionality offered there) to solve this problem and identify your molecules before beginning your work with SMIRNOFF.

### 1.6.3 What about starting from a PDB file?

PDB files do not in general provide the chemical identity of small molecules contained therein, and thus do not provide suitable starting points for applying SMIRNOFF to small molecules. This is especially problematic for PDB files from X-ray crystallography which typically do not include proteins, making the problem even worse. For our purposes here, however, we assume you begin with the coordinates of all atoms present and the full topology of your system.

Given a PDB file of a hypothetical biomolecular system of interest containing a small molecule, there are several routes available to you for treating the small molecule present:

- Use a cheminformatics toolkit (see above) to infer bond orders
- Identify your ligand from a database; e.g. if it is in the Protein Data Bank (PDB), it will be present in the [Ligand Expo](#) meaning that it has a database entry and code you can use to look up its putative chemical identity
- Identify your ligand by name or SMILES string (or similar) from the literature or your collaborators

### 1.6.4 What do you recommend as a starting point?

For application of SMIRNOFF force fields, we recommend that you begin your work with formats which provide the chemical identity of your small molecule (including formal charge and bond order). This means we recommend one of the following or equivalent:

- A `.mol2` file or files for the molecules comprising your system, with correct bond orders and formal charges. (Note: Do NOT generate this from a simulation package or tool which does not have access to bond order information; you may end up with a `.mol2` file, but the bond orders will be incorrect)
- Isomeric SMILES strings for the components of your system
- InCHI strings for the components of your system
- Chemical Identity Registry numbers for the components of your system
- IUPAC names for the components of your system

Essentially, anything which provides the full identity of what you want to simulate (including stereochemistry) should work, though it may require more or less work to get it into an acceptable format.



### 1.6.5 My conda installation of the toolkit doesn't appear to work. What should I try next?

We recommend that you install the toolkit in a fresh conda environment, explicitly passing the channels to be used, in-order:

```
conda create -n <my_new_env> -c conda-forge -c omnia openforcefield
conda activate <my_new_env>
```

Installing into a new environment avoids forcing conda to satisfy the dependencies of both the toolkit and all existing packages in that environment. Taking the approach that conda environments are generally disposable, even ephemeral, minimizes the chances for hard-to-diagnose dependency issues.



## API DOCUMENTATION

## 2.1 Molecular topology representations

This module provides pure-Python classes for representing molecules and molecular systems. These classes offer several advantages over corresponding Topology objects in [OpenMM](#) and [MDTraj](#), including offering serialization to a variety of standard formats (including [XML](#), [JSON](#), [YAML](#), [BSON](#), [TOML](#), and [MessagePack](#)).

### 2.1.1 Primary objects

<code>FrozenMolecule</code>	Immutable chemical representation of a molecule, such as a small molecule or biopolymer.
<code>Molecule</code>	Mutable chemical representation of a molecule, such as a small molecule or biopolymer.
<code>Topology</code>	A Topology is a chemical representation of a system containing one or more molecules appearing in a specified order.
<code>TopologyMolecule</code>	TopologyMolecules are built to be an efficient way to store large numbers of copies of the same molecule for parameterization and system preparation.

#### `openforcefield.topology.FrozenMolecule`

```
class openforcefield.topology.FrozenMolecule(other=None, file_format=None,  
                                              toolkit_registry=ToolkitRegistry containing  
                                              The RDKit, AmberTools, Built-in Toolkit, al-  
                                              low_undefined_stereo=False)  
    Immutable chemical representation of a molecule, such as a small molecule or biopolymer.
```

## Examples

Create a molecule from a sdf file

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = FrozenMolecule.from_file(sdf_filepath)
```

Convert to OpenEye OEMol object

```
>>> oemol = molecule.to_openeye()
```

Create a molecule from an OpenEye molecule

```
>>> molecule = FrozenMolecule.from_openeye(oemol)
```

Convert to RDKit Mol object

```
>>> rdmol = molecule.to_rdkit()
```

Create a molecule from an RDKit molecule

```
>>> molecule = FrozenMolecule.from_rdkit(rdmol)
```

Create a molecule from IUPAC name (requires the OpenEye toolkit)

```
>>> molecule = FrozenMolecule.from_iupac('imatinib')
```

Create a molecule from SMILES

```
>>> molecule = FrozenMolecule.from_smiles('Cc1ccccc1')
```

**Warning:** This API is experimental and subject to change.

## Attributes

**angles** Get an iterator over all i-j-k angles.

**atoms** Iterate over all Atom objects.

**bonds** Iterate over all Bond objects.

**conformers** Returns the list of conformers for this molecule.

**has\_unique\_atom\_names** True if the molecule has unique atom names, False otherwise.

**hill\_formula** Get the Hill formula of the molecule

**impropers** Iterate over all proper torsions in the molecule

**n\_angles** int: number of angles in the Molecule.

**n\_atoms** The number of Atom objects.

**n\_bonds** The number of Bond objects.

**n\_conformers** Returns the number of conformers for this molecule.

**n\_impropers** int: number of improper torsions in the Molecule.

**n\_particles** The number of Particle objects, which corresponds to how many positions must be used.

**n\_propers** int: number of proper torsions in the Molecule.

**n\_rings** Return the number of rings found in the Molecule

**n\_virtual\_particles** The number of VirtualParticle objects.

**n\_virtual\_sites** The number of VirtualSite objects.

**name** The name (or title) of the molecule

**partial\_charges** Returns the partial charges (if present) on the molecule.

**particles** Iterate over all Particle objects.

**propers** Iterate over all proper torsions in the molecule

**properties** The properties dictionary of the molecule

**rings** Return the number of rings in this molecule.

**torsions** Get an iterator over all i-j-k-l torsions.

**total\_charge** Return the total charge on the molecule

**virtual\_sites** Iterate over all VirtualSite objects.

## Methods

<code>are_isomorphic(mol1, mol2[, ...])</code>	Determines whether the two molecules are isomorphic by comparing their graph representations and the chosen node/edge attributes.
<code>assign_fractional_bond_orders([...])</code>	Update and store list of bond orders this molecule.
<code>assign_partial_charges(partial_charge_method)</code>	Calculate partial atomic charges for this molecule using an underlying toolkit, and assign the new values to the <code>partial_charges</code> attribute.
<code>canonical_order_atoms([toolkit_registry])</code>	Canonical order the atoms in a copy of the molecule using a toolkit, returns a new copy.
<code>chemical_environment_matches(query[, ...])</code>	Retrieve all matches for a given chemical environment query.
<code>compute_partial_charges_am1bcc([...])</code>	Calculate partial atomic charges for this molecule using AM1-BCC run by an underlying toolkit and assign them to this molecule's <code>partial_charges</code> attribute.
<code>enumerate_protomers([max_states])</code>	Enumerate the formal charges of a molecule to generate different protomoers.
<code>enumerate_stereoisomers([undefined_only, ...])</code>	Enumerate the stereocenters and bonds of the current molecule.
<code>enumerate_tautomers([max_states, ...])</code>	Enumerate the possible tautomers of the current molecule
<code>find_rotatable_bonds([...])</code>	Find all bonds classed as rotatable ignoring any matched to the <code>ignore_functional_groups</code> list.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.

continues on next page

Table 2 – continued from previous page

<code>from_dict(molecule_dict)</code>	Create a new Molecule from a dictionary representation
<code>from_file(file_path[, file_format, ...])</code>	Create one or more molecules from a file
<code>from_inchi(inchi[, allow_undefined_stereo, ...])</code>	Construct a Molecule from a InChI representation
<code>from_iupac(iupac_name[, toolkit_registry, ...])</code>	Generate a molecule from IUPAC or common name
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_mapped_smiles(mapped_smiles[, ...])</code>	Create an openforcefield.topology.molecule.Molecule from a mapped SMILES made with cmiles.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_openeye(*args, **kwargs)</code>	Create a Molecule from an OpenEye molecule.
<code>from_pdb_and_smiles(file_path, smiles[, ...])</code>	Create a Molecule from a pdb file and a SMILES string using RDKit.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_qcschema(qca_record[, client, ...])</code>	Create a Molecule from a QCArchive entry based on the cmiles information.
<code>from_rdkit(*args, **kwargs)</code>	Create a Molecule from an RDKit molecule.
<code>from_smiles(smiles[, ...])</code>	Construct a Molecule from a SMILES representation
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_topology(topology)</code>	Return a Molecule representation of an openforcefield Topology containing a single Molecule object.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>generate_conformers([toolkit_registry, ...])</code>	Generate conformers for this molecule using an underlying toolkit.
<code>generate_unique_atom_names()</code>	Generate unique atom names using element name and number of times that element has occurred e.g.
<code>get_bond_between(i, j)</code>	Returns the bond between two atoms
<code>is_isomorphic_with(other, **kwargs)</code>	Check if the molecule is isomorphic with the other molecule which can be an openforcefield.topology.Molecule, or TopologyMolecule or nx.Graph().
<code>remap(mapping_dict[, current_to_new])</code>	Remap all of the indexes in the molecule to match the given mapping dict
<code>strip_atom_stereochemistry(smarts[, ...])</code>	Delete stereochemistry information for certain atoms, if it is present.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dictionary representation of the molecule.

continues on next page

Table 2 – continued from previous page

<code>to_file(file_path, file_format[, ...])</code>	Write the current molecule to a file or file-like object
<code>to_hill_formula(molecule)</code>	Generate the Hill formula from either a FrozenMolecule, TopologyMolecule or nx.Graph() of the molecule
<code>to_inchi([fixed_hydrogens, toolkit_registry])</code>	Create an InChI string for the molecule using the requested toolkit backend.
<code>to_inchikey([fixed_hydrogens, toolkit_registry])</code>	Create an InChIKey for the molecule using the requested toolkit backend.
<code>to_iupac([toolkit_registry])</code>	Generate IUPAC name from Molecule
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_networkx()</code>	Generate a NetworkX undirected graph from the Molecule.
<code>to_openeye([aromaticity_model])</code>	Create an OpenEye molecule
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_qcschema([multiplicity, conformer, extras])</code>	Generate the qschema input format used to submit jobs to archive or run qcengine calculations locally, spec can be found here < <a href="https://molssi-qc-schema.readthedocs.io/en/latest/index.html">https://molssi-qc-schema.readthedocs.io/en/latest/index.html</a> >
<code>to_rdkit([aromaticity_model])</code>	Create an RDKit molecule
<code>to_smiles([isomeric, explicit_hydrogens, ...])</code>	Return a canonical isomeric SMILES representation of the current molecule.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_topology()</code>	Return an openforcefield Topology representation containing one copy of this molecule
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

**\_\_init\_\_**(*other=None, file\_format=None, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, allow\_undefined\_stereo=False*)  
Create a new FrozenMolecule object

#### Parameters

**other** [optional, default=None] If specified, attempt to construct a copy of the Molecule from the specified object. This can be any one of the following:

- a `Molecule` object
- a file that can be used to construct a `Molecule` object
- an `openeye.oechem.OEMol`
- an `rdkit.Chem.rdchem.Mol`
- a serialized `Molecule` object

**file\_format** [str, optional, default=None] If providing a file-like object, you must specify the format of the data. If providing a file, the file format will attempt to be guessed from the suffix.

**toolkit\_registry** [a `ToolkitRegistry` or `ToolkitWrapper` object, optional, default=GLOBAL\_TOOLKIT\_REGISTRY] `ToolkitRegistry` or `ToolkitWrapper` to use for I/O operations

**allow\_undefined\_stereo** [bool, default=False] If loaded from a file and False, raises an exception if undefined stereochemistry is detected during the molecule's construction.

### Examples

Create an empty molecule:

```
>>> empty_molecule = FrozenMolecule()
```

Create a molecule from a file that can be used to construct a molecule, using either a filename or file-like object:

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = FrozenMolecule(sdf_filepath)
>>> molecule = FrozenMolecule(open(sdf_filepath, 'r'), file_format='sdf')
```

```
>>> import gzip
>>> mol2_gz_filepath = get_data_file_path('molecules/toluene.mol2.gz')
>>> molecule = FrozenMolecule(gzip.GzipFile(mol2_gz_filepath, 'r'), file_format='mol2')
```

Create a molecule from another molecule:

```
>>> molecule_copy = FrozenMolecule(molecule)
```

Convert to OpenEye OEMol object

```
>>> oemol = molecule.to_openeye()
```

Create a molecule from an OpenEye molecule:

```
>>> molecule = FrozenMolecule(oemol)
```

Convert to RDKit Mol object

```
>>> rdmol = molecule.to_rdkit()
```

Create a molecule from an RDKit molecule:

```
>>> molecule = FrozenMolecule(rdmol)
```

Create a molecule from a serialized molecule object:

```
>>> serialized_molecule = molecule.__getstate__()
>>> molecule_copy = Molecule(serialized_molecule)
```

## Methods

<code>__init__([other, file_format, ...])</code>	Create a new FrozenMolecule object
<code>are_isomorphic(mol1, mol2[, ...])</code>	Determines whether the two molecules are isomorphic by comparing their graph representations and the chosen node/edge attributes.
<code>assign_fractional_bond_orders([...])</code>	Update and store list of bond orders this molecule.
<code>assign_partial_charges(partial_charge_method)</code>	Calculate partial atomic charges for this molecule using an underlying toolkit, and assign the new values to the <code>partial_charges</code> attribute.
<code>canonical_order_atoms([toolkit_registry])</code>	Canonical order the atoms in a copy of the molecule using a toolkit, returns a new copy.
<code>chemical_environment_matches(query[, ...])</code>	Retrieve all matches for a given chemical environment query.
<code>compute_partial_charges_am1bcc([...])</code>	Calculate partial atomic charges for this molecule using AM1-BCC run by an underlying toolkit and assign them to this molecule's <code>partial_charges</code> attribute.
<code>enumerate_protomers([max_states])</code>	Enumerate the formal charges of a molecule to generate different protomers.
<code>enumerate_stereoisomers([undefined_only, ...])</code>	Enumerate the stereocenters and bonds of the current molecule.
<code>enumerate_tautomers([max_states, ...])</code>	Enumerate the possible tautomers of the current molecule
<code>find_rotatable_bonds([...])</code>	Find all bonds classed as rotatable ignoring any matched to the <code>ignore_functional_groups</code> list.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(molecule_dict)</code>	Create a new Molecule from a dictionary representation
<code>from_file(file_path[, file_format, ...])</code>	Create one or more molecules from a file
<code>from_inchi(inchi[, allow_undefined_stereo, ...])</code>	Construct a Molecule from a InChI representation
<code>from_iupac(iupac_name[, toolkit_registry, ...])</code>	Generate a molecule from IUPAC or common name
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_mapped_smiles(mapped_smiles[, ...])</code>	Create an <code>openforcefield.topology.molecule.Molecule</code> from a mapped SMILES made with <code>cmiles</code> .
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_openeye(*args, **kwargs)</code>	Create a Molecule from an OpenEye molecule.
<code>from_pdb_and_smiles(file_path, smiles[, ...])</code>	Create a Molecule from a pdb file and a SMILES string using RDKit.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_qcschema(qca_record[, client, ...])</code>	Create a Molecule from a QCArchive entry based on the <code>cmiles</code> information.
<code>from_rdkit(*args, **kwargs)</code>	Create a Molecule from an RDKit molecule.

continues on next page

Table 3 – continued from previous page

<code>from_smiles(smiles[, ...])</code>	Construct a Molecule from a SMILES representation
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_topology(topology)</code>	Return a Molecule representation of an openforcefield Topology containing a single Molecule object.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>generate_conformers([toolkit_registry, ...])</code>	Generate conformers for this molecule using an underlying toolkit.
<code>generate_unique_atom_names()</code>	Generate unique atom names using element name and number of times that element has occurred e.g.
<code>get_bond_between(i, j)</code>	Returns the bond between two atoms
<code>is_isomorphic_with(other, **kwargs)</code>	Check if the molecule is isomorphic with the other molecule which can be an openforcefield.topology.Molecule, or TopologyMolecule or nx.Graph().
<code>remap(mapping_dict[, current_to_new])</code>	Remap all of the indexes in the molecule to match the given mapping dict
<code>strip_atom_stereochemistry(smarts[, ...])</code>	Delete stereochemistry information for certain atoms, if it is present.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dictionary representation of the molecule.
<code>to_file(file_path, file_format[, ...])</code>	Write the current molecule to a file or file-like object
<code>to_hill_formula(molecule)</code>	Generate the Hill formula from either a FrozenMolecule, TopologyMolecule or nx.Graph() of the molecule
<code>to_inchi([fixed_hydrogens, toolkit_registry])</code>	Create an InChI string for the molecule using the requested toolkit backend.
<code>to_inchikey([fixed_hydrogens, toolkit_registry])</code>	Create an InChIKey for the molecule using the requested toolkit backend.
<code>to_iupac([toolkit_registry])</code>	Generate IUPAC name from Molecule
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_networkx()</code>	Generate a NetworkX undirected graph from the Molecule.
<code>to_openeye([aromaticity_model])</code>	Create an OpenEye molecule
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_qcschema([multiplicity, conformer, extras])</code>	Generate the qschema input format used to submit jobs to archive or run qcengine calculations locally, spec can be found here < <a href="https://molssi-qc-schema.readthedocs.io/en/latest/index.html">https://molssi-qc-schema.readthedocs.io/en/latest/index.html</a> >
<code>to_rdkit([aromaticity_model])</code>	Create an RDKit molecule

continues on next page



Table 3 – continued from previous page

<code>to_smiles([isomeric, explicit_hydrogens, ...])</code>	Return a canonical isomeric SMILES representation of the current molecule.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_topology()</code>	Return an openforcefield Topology representation containing one copy of this molecule
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

### Attributes

<code>angles</code>	Get an iterator over all i-j-k angles.
<code>atoms</code>	Iterate over all Atom objects.
<code>bonds</code>	Iterate over all Bond objects.
<code>conformers</code>	Returns the list of conformers for this molecule.
<code>has_unique_atom_names</code>	True if the molecule has unique atom names, False otherwise.
<code>hill_formula</code>	Get the Hill formula of the molecule
<code>impropers</code>	Iterate over all proper torsions in the molecule
<code>n_angles</code>	int: number of angles in the Molecule.
<code>n_atoms</code>	The number of Atom objects.
<code>n_bonds</code>	The number of Bond objects.
<code>n_conformers</code>	Returns the number of conformers for this molecule.
<code>n_impropers</code>	int: number of improper torsions in the Molecule.
<code>n_particles</code>	The number of Particle objects, which corresponds to how many positions must be used.
<code>n_propers</code>	int: number of proper torsions in the Molecule.
<code>n_rings</code>	Return the number of rings found in the Molecule
<code>n_virtual_particles</code>	The number of VirtualParticle objects.
<code>n_virtual_sites</code>	The number of VirtualSite objects.
<code>name</code>	The name (or title) of the molecule
<code>partial_charges</code>	Returns the partial charges (if present) on the molecule.
<code>particles</code>	Iterate over all Particle objects.
<code>propers</code>	Iterate over all proper torsions in the molecule
<code>properties</code>	The properties dictionary of the molecule
<code>rings</code>	Return the number of rings in this molecule.
<code>torsions</code>	Get an iterator over all i-j-k-l torsions.
<code>total_charge</code>	Return the total charge on the molecule
<code>virtual_sites</code>	Iterate over all VirtualSite objects.

#### property `has_unique_atom_names`

True if the molecule has unique atom names, False otherwise.

#### method `generate_unique_atom_names()`

Generate unique atom names using element name and number of times that element has occurred  
e.g. 'C1', 'H1', 'O1', 'C2', ...

**strip\_atom\_stereochemistry**(*smarts*, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Delete stereochemistry information for certain atoms, if it is present. This method can be used to “normalize” molecules imported from different cheminformatics toolkits, which differ in which atom centers are considered stereogenic.

#### Parameters

**smarts:** **str** or **ChemicalEnvironment** Tagged SMARTS with a single atom with index 1. Any matches for this atom will have any assigned stereochemistry information removed.

**toolkit\_registry** [a *ToolkitRegistry* or *ToolkitWrapper* object, optional, default=`GLOBAL_TOOLKIT_REGISTRY`] *ToolkitRegistry* or *ToolkitWrapper* to use for I/O operations

**to\_dict**()

Return a dictionary representation of the molecule.

#### Returns

**molecule\_dict** [*OrderedDict*] A dictionary representation of the molecule.

**classmethod** **from\_dict**(*molecule\_dict*)

Create a new *Molecule* from a dictionary representation

#### Parameters

**molecule\_dict** [*OrderedDict*] A dictionary representation of the molecule.

#### Returns

**molecule** [*Molecule*] A *Molecule* created from the dictionary representation

**to\_smiles**(*isomeric*=*True*, *explicit\_hydrogens*=*True*, *mapped*=*False*,  
*toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Return a canonical isomeric SMILES representation of the current molecule. A partially mapped smiles can also be generated for atoms of interest by supplying an *atom\_map* to the properties dictionary.

---

**Note:** RDKit and OpenEye versions will not necessarily return the same representation.

---

#### Parameters

**isomeric:** **bool optional, default= True** return an isomeric smiles

**explicit\_hydrogens:** **bool optional, default=True** return a smiles string containing all hydrogens explicitly

**mapped:** **bool optional, default=False** return a explicit hydrogen mapped smiles, the atoms to be mapped can be controlled by supplying an atom map into the properties dictionary. If no mapping is passed all atoms will be mapped in order, else an atom map dictionary from the current atom index to the map id should be supplied with no duplicates. The map ids (values) should start from 0 or 1.

**toolkit\_registry** [*openforcefield.utils.toolkits.ToolkitRegistry* or *openforcefield.utils.toolkits.ToolkitWrapper*, optional, default=None] *ToolkitRegistry* or *ToolkitWrapper* to use for SMILES conversion

#### Returns

**smiles** [*str*] Canonical isomeric explicit-hydrogen SMILES

## Examples

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
>>> smiles = molecule.to_smiles()
```

**static from\_inchi**(*inchi*, *allow\_undefined\_stereo*=False, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Construct a Molecule from a InChI representation

### Parameters

**inchi** [str] The InChI representation of the molecule.

**allow\_undefined\_stereo** [bool, default=False] Whether to accept InChI with undefined stereochemistry. If False, an exception will be raised if a InChI with undefined stereochemistry is passed into this function.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for InChI-to-molecule conversion

### Returns

**molecule** [openforcefield.topology.Molecule]

## Examples

```
make cis-1,2-Dichloroethene >>> molecule = Molecule.from_inchi('InChI=1S/C2H2Cl2/c3-1-2-4/h1-2H/b2-1-')
```

**to\_inchi**(*fixed\_hydrogens*=False, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Create an InChI string for the molecule using the requested toolkit backend. InChI is a standardised representation that does not capture tautomers unless specified using the fixed hydrogen layer.

For information on InChi see here <https://iupac.org/who-we-are/divisions/division-details/inchi/>

### Parameters

**fixed\_hydrogens**: bool, default=False If a fixed hydrogen layer should be added to the InChI, if *True* this will produce a non standard specific InChI string of the molecule.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for molecule-to-InChI conversion

### Returns

**inchi**: str The InChI string of the molecule.

### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the *toolkit\_registry* parameter

**to\_inchikey**(*fixed\_hydrogens=False, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Create an InChIKey for the molecule using the requested toolkit backend. InChIKey is a standardised representation that does not capture tautomers unless specified using the fixed hydrogen layer.

For information on InChi see here <https://iupac.org/who-we-are/divisions/division-details/inchi/>

#### Parameters

**fixed\_hydrogens:** `bool`, `default=False` If a fixed hydrogen layer should be added to the InChI, if `True` this will produce a non standard specific InChI string of the molecule.

**toolkit\_registry** [`openforcefield.utils.toolkits.ToolkitRegistry` or `openforcefield.utils.toolkits.ToolkitWrapper`, optional, `default=None`] `ToolkitRegistry` or `ToolkitWrapper` to use for molecule-to-InChIKey conversion

#### Returns

**inchi\_key:** `str` The InChIKey representation of the molecule.

#### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the `toolkit_registry` parameter

**static from\_smiles**(*smiles, hydrogens\_are\_explicit=False, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, allow\_undefined\_stereo=False*)

Construct a Molecule from a SMILES representation

#### Parameters

**smiles** [`str`] The SMILES representation of the molecule.

**hydrogens\_are\_explicit** [`bool`, `default = False`] If `False`, the cheminformatics toolkit will perform hydrogen addition

**toolkit\_registry** [`openforcefield.utils.toolkits.ToolkitRegistry` or `openforcefield.utils.toolkits.ToolkitWrapper`, optional, `default=None`] `ToolkitRegistry` or `ToolkitWrapper` to use for SMILES-to-molecule conversion

**allow\_undefined\_stereo** [`bool`, `default=False`] Whether to accept SMILES with undefined stereochemistry. If `False`, an exception will be raised if a SMILES with undefined stereochemistry is passed into this function.

#### Returns

**molecule** [`openforcefield.topology.Molecule`]

## Examples

```
>>> molecule = Molecule.from_smiles('Cc1ccccc1')
```

```
static are_isomorphic(mol1, mol2, return_atom_map=False, aromatic_matching=True, formal_charge_matching=True, bond_order_matching=True, atom_stereochemistry_matching=True, bond_stereochemistry_matching=True, strip_pyrimidal_n_atom_stereo=True, toolkit_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit)
```

Determines whether the two molecules are isomorphic by comparing their graph representations and the chosen node/edge attributes. Minimally connections and atomic\_number are checked.

If nx.Graphs() are given they must at least have atomic\_number attributes on nodes. other optional attributes for nodes are: is\_aromatic, formal\_charge and stereochemistry. optional attributes for edges are: is\_aromatic, bond\_order and stereochemistry.

**Warning:** This API is experimental and subject to change.

## Parameters

**mol1** [an openforcefield.topology.molecule.FrozenMolecule or TopologyMolecule or nx.Graph()]

**mol2** [an openforcefield.topology.molecule.FrozenMolecule or TopologyMolecule or nx.Graph()] The molecule to test for isomorphism.

**return\_atom\_map:** bool, default=False, optional will return an optional dict containing the atomic mapping.

**aromatic\_matching:** bool, default=True, optional compare the aromatic attributes of bonds and atoms.

**formal\_charge\_matching:** bool, default=True, optional compare the formal charges attributes of the atoms.

**bond\_order\_matching:** bool, default=True, optional compare the bond order on attributes of the bonds.

**atom\_stereochemistry\_matching** [bool, default=True, optional] If False, atoms' stereochemistry is ignored for the purpose of determining equality.

**bond\_stereochemistry\_matching** [bool, default=True, optional] If False, bonds' stereochemistry is ignored for the purpose of determining equality.

**strip\_pyrimidal\_n\_atom\_stereo:** bool, default=True, optional If True, any stereochemistry defined around pyrimidal nitrogen stereocenters will be disregarded in the isomorphism check.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for removing stereochemistry from pyrimidal nitrogens.

## Returns

**molecules\_are\_isomorphic** [bool]

**atom\_map** [default=None, Optional,] [Dict[int,int]] ordered by mol1 indexing {mol1\_index: mol2\_index} If molecules are not isomorphic given input arguments, will return None instead of dict.

**is\_isomorphic\_with**(other, \*\*kwargs)

Check if the molecule is isomorphic with the other molecule which can be an openforcefield.topology.Molecule, or TopologyMolecule or nx.Graph(). Full matching is done using the options described below.

**Warning:** This API is experimental and subject to change.

#### Parameters

**other:** openforcefield.topology.Molecule or TopologyMolecule or nx.Graph()

**return\_atom\_map:** bool, default=False, optional will return an optional dict containing the atomic mapping.

**aromatic\_matching:** bool, default=True, optional

compare the aromatic attributes of bonds and atoms.

**formal\_charge\_matching:** bool, default=True, optional

compare the formal charges attributes of the atoms.

**bond\_order\_matching:** bool, default=True, optional

compare the bond order on attributes of the bonds.

**atom\_stereochemistry\_matching** [bool, default=True, optional] If False, atoms' stereochemistry is ignored for the purpose of determining equality.

**bond\_stereochemistry\_matching** [bool, default=True, optional] If False, bonds' stereochemistry is ignored for the purpose of determining equality.

**strip\_pyrimidal\_n\_atom\_stereo:** bool, default=True, optional If True, any stereochemistry defined around pyrimidal nitrogen stereocenters will be disregarded in the isomorphism check.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for removing stereochemistry from pyrimidal nitrogens.

#### Returns

**isomorphic** [bool]

**generate\_conformers**(*toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, n\_conformers=10, rms\_cutoff=None, clear\_existing=True*)

Generate conformers for this molecule using an underlying toolkit. If n\_conformers=0, no toolkit wrapper will be called. If n\_conformers=0 and clear\_existing=True, molecule.conformers will be set to None.

#### Parameters

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

**n\_conformers** [int, default=1] The maximum number of conformers to produce

**rms\_cutoff** [simtk.Quantity-wrapped float, in units of distance, optional, default=None] The minimum RMS value at which two conformers are considered redundant and one is deleted. Precise implementation of this cutoff may be toolkit-dependent. If None, the cutoff is set to be the default value for each ToolkitWrapper (generally 1 Angstrom).

**clear\_existing** [bool, default=True] Whether to overwrite existing conformers for the molecule

#### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the `toolkit_registry` parameter

#### Examples

```
>>> molecule = Molecule.from_smiles('CCCCC')
>>> molecule.generate_conformers()
```

**compute\_partial\_charges\_am1bcc**(*use\_conformers=None*, *strict\_n\_conformers=False*, *toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Calculate partial atomic charges for this molecule using AM1-BCC run by an underlying toolkit and assign them to this molecule's `partial_charges` attribute.

#### Parameters

**strict\_n\_conformers** [bool, default=False] Whether to raise an exception if an invalid number of conformers is provided for the given charge method. If this is False and an invalid number of conformers is found, a warning will be raised.

**use\_conformers** [iterable of simtk.unit.Quantity-wrapped numpy arrays, each with shape (n\_atoms, 3) and dimension of distance. Optional, default=None] Coordinates to use for partial charge calculation. If None, an appropriate number of conformers for the given charge method will be generated.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for the calculation

#### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the `toolkit_registry` parameter

#### Examples

```
>>> molecule = Molecule.from_smiles('CCCCC')
>>> molecule.generate_conformers()
>>> molecule.compute_partial_charges_am1bcc()
```

**assign\_partial\_charges**(*partial\_charge\_method*, *strict\_n\_conformers=False*, *use\_conformers=None*, *toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Calculate partial atomic charges for this molecule using an underlying toolkit, and assign the new values to the `partial_charges` attribute.

#### Parameters

**partial\_charge\_method** [string] The partial charge calculation method to use for partial charge calculation.

**strict\_n\_conformers** [bool, default=False] Whether to raise an exception if an invalid number of conformers is provided for the given charge method. If this is False and an invalid number of conformers is found, a warning will be raised.

**use\_conformers** [iterable of simtk.unit.Quantity-wrapped numpy arrays, each with shape (n\_atoms, 3) and dimension of distance. Optional, default=None] Coordinates to use for partial charge calculation. If None, an appropriate number of conformers will be generated.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for the calculation.

#### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the toolkit\_registry parameter

#### Examples

```
>>> molecule = Molecule.from_smiles('CCCCC')
>>> molecule.assign_partial_charges('am1-mulliken')
```

**assign\_fractional\_bond\_orders**(bond\_order\_model=None, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, use\_conformers=None)

Update and store list of bond orders this molecule. Bond orders are stored on each bond, in the *bond.fractional\_bond\_order* attribute.

**Warning:** This API is experimental and subject to change.

#### Parameters

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

**bond\_order\_model** [string, optional. Default=None] The bond order model to use for fractional bond order calculation. If None, “am1-wiberg” will be used.

**use\_conformers** [iterable of simtk.unit.Quantity(np.array) with shape (n\_atoms, 3) and dimension of distance, optional, default=None] The conformers to use for fractional bond order calculation. If None, an appropriate number of conformers will be generated by an available ToolkitWrapper.

#### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the toolkit\_registry parameter



## Examples

```
>>> molecule = Molecule.from_smiles('CCCCC')
>>> molecule.assign_fractional_bond_orders()
```

### to\_networkx()

Generate a NetworkX undirected graph from the Molecule.

Nodes are Atoms labeled with particle indices and atomic elements (via the `element` node attribute). Edges denote chemical bonds between Atoms. Virtual sites are not included, since they lack a concept of chemical connectivity.

#### Returns

**graph** [networkx.Graph] The resulting graph, with nodes (atoms) labeled with atom indices, elements, stereochemistry and aromaticity flags and bonds with two atom indices, bond order, stereochemistry, and aromaticity flags

## Examples

Retrieve the bond graph for imatinib (OpenEye toolkit required)

```
>>> molecule = Molecule.from_iupac('imatinib')
>>> nxgraph = molecule.to_networkx()
```

### find\_rotatable\_bonds(*ignore\_functional\_groups=None, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Find all bonds classed as rotatable ignoring any matched to the `ignore_functional_groups` list.

#### Parameters

**ignore\_functional\_groups:** optional, List[str], default=None, A list of bond SMARTS patterns to be ignored when finding rotatable bonds.

**toolkit\_registry:** openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper or ToolkitWrapper to use for SMARTS matching

#### Returns

**bonds:** List[openforcefield.topology.molecule.Bond] The list of openforcefield.topology.molecule.Bond instances which are rotatable.

### property partial\_charges

Returns the partial charges (if present) on the molecule.

#### Returns

**partial\_charges** [a simtk.unit.Quantity - wrapped numpy array [1 x n\_atoms] or None] The partial charges on this Molecule's atoms. Returns None if no charges have been specified.

### property n\_particles

The number of Particle objects, which corresponds to how many positions must be used.

### property n\_atoms

The number of Atom objects.

### property n\_virtual\_sites

The number of VirtualSite objects.

**property n\_virtual\_particles**

The number of VirtualParticle objects.

**property n\_bonds**

The number of Bond objects.

**property n\_angles**

int: number of angles in the Molecule.

**property n\_propers**

int: number of proper torsions in the Molecule.

**property n\_impropers**

int: number of improper torsions in the Molecule.

**property n\_rings**

Return the number of rings found in the Molecule

Requires the RDKit to be installed.

---

**Note:** For systems containing some special cases of connected rings, this function may not be well-behaved and may report a different number rings than expected. Some problematic cases include networks of many (5+) rings or bicyclic moieties (i.e. norbornane).

---

**property particles**

Iterate over all Particle objects.

**property atoms**

Iterate over all Atom objects.

**property conformers**

Returns the list of conformers for this molecule. This returns a list of simtk.unit.Quantity-wrapped numpy arrays, of shape (3 x n\_atoms) and with dimensions of distance. The return value is the actual list of conformers, and changes to the contents affect the original FrozenMolecule.

**property n\_conformers**

Returns the number of conformers for this molecule.

**property virtual\_sites**

Iterate over all VirtualSite objects.

**property bonds**

Iterate over all Bond objects.

**property angles**

Get an iterator over all i-j-k angles.

**property torsions**

Get an iterator over all i-j-k-l torsions. Note that i-j-k-i torsions (cycles) are excluded.

**Returns**

**torsions** [iterable of 4-Atom tuples]

**property propers**

Iterate over all proper torsions in the molecule

**property impropers**

Iterate over all proper torsions in the molecule

**property total\_charge**

Return the total charge on the molecule

**property name**

The name (or title) of the molecule

**property properties**

The properties dictionary of the molecule

**property hill\_formula**

Get the Hill formula of the molecule

**static to\_hill\_formula(*molecule*)**

Generate the Hill formula from either a FrozenMolecule, TopologyMolecule or nx.Graph() of the molecule

**Parameters**

**molecule** [FrozenMolecule, TopologyMolecule or nx.Graph()]

**Returns**

**formula** [the Hill formula of the molecule]

**Raises**

**NotImplementedError** [if the molecule is not of one of the specified types.]

**chemical\_environment\_matches(*query*, *toolkit\_registry*=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit)**

Retrieve all matches for a given chemical environment query.

**Parameters**

**query** [str or ChemicalEnvironment] SMARTS string (with one or more tagged atoms) or ChemicalEnvironment query. Query will internally be resolved to SMIRKS using query.asSMIRKS() if it has an .asSMIRKS method.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=GLOBAL\_TOOLKIT\_REGISTRY] ToolkitRegistry or ToolkitWrapper to use for chemical environment matches

**Returns**

**matches** [list of atom index tuples] A list of tuples, containing the indices of the matching atoms.

**Examples**

Retrieve all the carbon-carbon bond matches in a molecule

```
>>> molecule = Molecule.from_iupac('imatinib')
>>> matches = molecule.chemical_environment_matches('[#6X3:1]~[#6X3:2]')
```

**classmethod from\_iupac(*iupac\_name*, *toolkit\_registry*=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, *allow\_undefined\_stereo*=False, \*\*kwargs)**

Generate a molecule from IUPAC or common name

**Parameters**

**iupac\_name** [str] IUPAC name of molecule to be generated

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=GLOBAL\_TOOLKIT\_REGISTRY] ToolkitRegistry or ToolkitWrapper to use for chemical environment matches

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if molecule contains undefined stereochemistry.

#### Returns

**molecule** [Molecule] The resulting molecule with position

---

**Note:** This method requires the OpenEye toolkit to be installed. ..

---

### Examples

Create a molecule from an IUPAC name

```
>>> molecule = Molecule.from_iupac('4-[(4-methylpiperazin-1-yl)methyl]-N-(4-methyl-3-[[4-(pyridin-3-yl)pyrimidin-2-yl]amino}phenyl)benzamide')
```

Create a molecule from a common name

```
>>> molecule = Molecule.from_iupac('imatinib')
```

**to\_iupac**(*toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Generate IUPAC name from Molecule

#### Returns

**iupac\_name** [str] IUPAC name of the molecule

---

**Note:** This method requires the OpenEye toolkit to be installed. ..

---

### Examples

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
>>> iupac_name = molecule.to_iupac()
```

**static from\_topology**(*topology*)

Return a Molecule representation of an openforcefield Topology containing a single Molecule object.

#### Parameters

**topology** [openforcefield.topology.Topology] The [Topology](#) object containing a single [Molecule](#) object. Note that OpenMM and MDTraj Topology objects are not supported.

#### Returns

**molecule** [openforcefield.topology.Molecule] The Molecule object in the topology

**Raises**

**ValueError** If the topology does not contain exactly one molecule.

**Examples**

Create a molecule from a Topology object that contains exactly one molecule

```
>>> molecule = Molecule.from_topology(topology)
```

**to\_topology()**

Return an openforcefield Topology representation containing one copy of this molecule

**Returns**

**topology** [openforcefield.topology.Topology] A Topology representation of this molecule

**Examples**

```
>>> molecule = Molecule.from_iupac('imatinib')
>>> topology = molecule.to_topology()
```

**static from\_file**(*file\_path*, *file\_format*=None, *toolkit\_registry*=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, *allow\_undefined\_stereo*=False)  
Create one or more molecules from a file

**Parameters**

**file\_path** [str or file-like object] The path to the file or file-like object to stream one or more molecules from.

**file\_format** [str, optional, default=None] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for your loaded toolkits for details.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper,]

**optional, default=GLOBAL\_TOOLKIT\_REGISTRY** ToolkitRegistry or ToolkitWrapper to use for file loading. If a Toolkit is passed, only the highest-precedence toolkit is used

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

**Returns**

**molecules** [Molecule or list of Molecules] If there is a single molecule in the file, a Molecule is returned; otherwise, a list of Molecule objects is returned.

## Examples

```
>>> from openforcefield.tests.utils import get_monomer_mol2_file_path
>>> mol2_file_path = get_monomer_mol2_file_path('cyclohexane')
>>> molecule = Molecule.from_file(mol2_file_path)
```

**to\_file**(*file\_path*, *file\_format*, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Write the current molecule to a file or file-like object

### Parameters

**file\_path** [str or file-like object] A file-like object or the path to the file to be written.

**file\_format** [str] Format specifier, one of ['MOL2', 'MOL2H', 'SDF', 'PDB', 'SMI', 'CAN', 'TDT'] Note that not all toolkits support all formats

**toolkit\_registry** [*openforcefield.utils.toolkits.ToolkitRegistry* or *openforcefield.utils.toolkits.ToolkitWrapper*,]

**optional, default=GLOBAL\_TOOLKIT\_REGISTRY** *ToolkitRegistry* or *ToolkitWrapper* to use for file writing. If a *Toolkit* is passed, only the highest-precedence toolkit is used

### Raises

**ValueError** If the requested *file\_format* is not supported by one of the installed chem-informatics toolkits

## Examples

```
>>> molecule = Molecule.from_iupac('imatinib')
>>> molecule.to_file('imatinib.mol2', file_format='mol2')
>>> molecule.to_file('imatinib.sdf', file_format='sdf')
>>> molecule.to_file('imatinib.pdb', file_format='pdb')
```

**enumerate\_tautomers**(*max\_states*=20, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Enumerate the possible tautomers of the current molecule

### Parameters

**max\_states: int optional, default=20** The maximum amount of molecules that should be returned

**toolkit\_registry:** *openforcefield.utils.toolkits.ToolkitRegistry* or *openforcefield.utils.toolkits.ToolkitWrapper*

**optional, default=GLOBAL\_TOOLKIT\_REGISTRY** *ToolkitRegistry* or *ToolkitWrapper* to use to enumerate the tautomers.

### Returns

**molecules:** *List[openforcefield.topology.Molecule]* A list of *openforcefield.topology.Molecule* instances not including the input molecule.

**enumerate\_stereoisomers**(*undefined\_only*=False, *max\_isomers*=20, *rationalise*=True, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Enumerate the stereocenters and bonds of the current molecule.

**Parameters**

**undefined\_only:** **bool optional, default=False** If we should enumerate all stereo-centers and bonds or only those with undefined stereochemistry

**max\_isomers:** **int optional, default=20** The maximum amount of molecules that should be returned

**rationalise:** **bool optional, default=True** If we should try to build and rationalise the molecule to ensure it can exist

**toolkit\_registry:** **openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper**

**optional, default=GLOBAL\_TOOLKIT\_REGISTRY** *ToolkitRegistry* or *ToolkitWrapper* to use to enumerate the stereoisomers.

**Returns**

**molecules:** **List[openforcefield.topology.Molecule]** A list of openforcefield.topology.Molecule instances not including the input molecule.

**enumerate\_protomers**(*max\_states=10*)

Enumerate the formal charges of a molecule to generate different protomoers.

**Parameters**

**max\_states:** **int optional, default=10**, The maximum number of protomer states to be returned.

**Returns**

**molecules:** **List[openforcefield.topology.Molecule]**, A list of the protomers of the input molecules not including the input.

**static from\_rdkit**(*\*args, \*\*kwargs*)

Create a Molecule from an RDKit molecule.

Requires the RDKit to be installed.

**Parameters**

**rdmol** [*rdkit.RDMol*] An RDKit molecule

**allow\_undefined\_stereo** [*bool*, *default=False*] If false, raises an exception if oemol contains undefined stereochemistry.

**Returns**

**molecule** [*openforcefield.Molecule*] An openforcefield molecule

**Examples**

Create a molecule from an RDKit molecule

```
>>> from rdkit import Chem
>>> from openforcefield.tests.utils import get_data_file_path
>>> rdmol = Chem.MolFromMolFile(get_data_file_path('systems/monomers/ethanol.sdf'))
>>> molecule = Molecule.from_rdkit(rdmol)
```

**to\_rdkit**(*aromaticity\_model='OEAAroModel\_MD'*)

Create an RDKit molecule

Requires the RDKit to be installed.

**Parameters**

**aromaticity\_model** [str, optional, default=DEFAULT\_AROMATICITY\_MODEL] The aromaticity model to use

**Returns**

**rdmol** [rkit.RDMol] An RDKit molecule

**Examples**

Convert a molecule to RDKit

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
>>> rdmol = molecule.to_rdkit()
```

**static from\_openeye**(\*args, \*\*kwargs)

Create a Molecule from an OpenEye molecule.

Requires the OpenEye toolkit to be installed.

**Parameters**

**oemol** [openeye.oechem.OEMol] An OpenEye molecule

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

**Returns**

**molecule** [openforcefield.topology.Molecule] An openforcefield molecule

**Examples**

Create a Molecule from an OpenEye OEMol

```
>>> from openeye import oechem
>>> from openforcefield.tests.utils import get_data_file_path
>>> ifs = oechem.oemolistream(get_data_file_path('systems/monomers/ethanol.mol2'))
>>> oemols = list(ifs.GetOEGraphMols())
>>> molecule = Molecule.from_openeye(oemols[0])
```

**to\_qcschema**(multiplicity=1, conformer=0, extras=None)

Generate the qcschema input format used to submit jobs to archive or run qcengine calculations locally, spec can be found here <<https://molssi-qc-schema.readthedocs.io/en/latest/index.html>>

**Warning:** This API is experimental and subject to change.

**Parameters**

**multiplicity** [int, default=1,] The multiplicity of the molecule required for qcschema

**conformer** [int, default=0,] The index of the conformer that should be used for qcschema



**extras** [dict, default=None] The extras dictionary that should be included into the `qcelestial.models.Molecule`. This can be used to include extra information such as the smiles representation.

#### Returns

**qcelestial.models.Molecule** : A validated qcschema

#### Raises

**ImportError** [if qcelestial is not installed; the qcschema can not be validated.]

**InvalidConformerError** [if there is no conformer found at the given index.]

**classmethod** `from_mapped_smiles(mapped_smiles, toolkit_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, allow_undefined_stereo=False)`

Create an `openforcefield.topology.molecule.Molecule` from a mapped SMILES made with `cmiles`. The molecule will be in the order of the indexing in the mapped smiles string.

**Warning:** This API is experimental and subject to change.

#### Parameters

**mapped\_smiles**: **str**, A CMILES-style mapped smiles string with explicit hydrogens.

**toolkit\_registry** [`openforcefield.utils.toolkits.ToolkitRegistry` or `openforcefield.utils.toolkits.ToolkitWrapper`, optional, default=None] `ToolkitRegistry` or `ToolkitWrapper` to use for SMILES-to-molecule conversion

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if `oemol` contains undefined stereochemistry.

#### Returns

**offmol** [`openforcefield.topology.molecule.Molecule`] An openforcefiled molecule instance.

#### Raises

**SmilesParsingError** [if the given SMILES had no indexing picked up by the toolkits.]

**classmethod** `from_qcschema(qca_record, client=None, toolkit_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, allow_undefined_stereo=False)`

Create a `Molecule` from a `QCArchive` entry based on the `cmiles` information.

If we also have a client instance/address we can go and attach the starting geometry.

#### Parameters

**qca\_record** [dict,] A `QCArchive` dict with json encoding or record instance

**client** [optional, default=None,] A `qcportal.FractalClient` instance so we can pull the initial molecule geometry.

**toolkit\_registry** [`openforcefield.utils.toolkits.ToolkitRegistry` or `openforcefield.utils.toolkits.ToolkitWrapper`, optional, default=None] `ToolkitRegistry` or `ToolkitWrapper` to use for SMILES-to-molecule conversion

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if `oemol` contains undefined stereochemistry.

**Returns**

**molecule** [openforcefield.topology.Molecule] An openforcefield molecule instance.

**Raises**

**AttributeError** [if the record dict can not be made from a record instance.] if a client is passed, because the client could not retrieve the initial molecule.

**KeyError** [if the dict does not contain the canonical\_isomeric\_explicit\_hydrogen\_mapped\_smiles.]

**InvalidConformerError** [silent error, if the conformer could not be attached.]

**classmethod from\_pdb\_and\_smiles**(*file\_path*, *smiles*, *allow\_undefined\_stereo=False*)

Create a Molecule from a pdb file and a SMILES string using RDKit.

Requires RDKit to be installed.

**Warning:** This API is experimental and subject to change.

The molecule is created and sanitised based on the SMILES string, we then find a mapping between this molecule and one from the PDB based only on atomic number and connections. The SMILES molecule is then reindex to match the PDB, the conformer is attached and the molecule returned.

**Parameters**

**file\_path:** str PDB file path

**smiles** [str] a valid smiles string for the pdb, used for stereochemistry and bond order

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

**Returns**

**molecule** [openforcefield.Molecule] An OFFMol instance with ordering the same as used in the PDB file.

**Raises**

**InvalidConformerError** [if the SMILES and PDB molecules are not isomorphic.]

**canonical\_order\_atoms**(*toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Canonical order the atoms in a copy of the molecule using a toolkit, returns a new copy.

**Warning:** This API is experimental and subject to change.

**Parameters**

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

**Returns**

**molecule** [openforcefield.topology.Molecule] An new openforcefield-style molecule with atoms in the canonical order.

**remap**(*mapping\_dict*, *current\_to\_new*=True)

Remap all of the indexes in the molecule to match the given mapping dict

**Warning:** This API is experimental and subject to change.

#### Parameters

**mapping\_dict** [dict,] A dictionary of the mapping between in the indexes, this should start from 0.

**current\_to\_new** [bool, default=True] The dict is {current\_index: new\_index} if True else {new\_index: current\_index}

#### Returns

**new\_molecule** [openforcefield.topology.molecule.Molecule] An openforcefield.Molecule instance with all attributes transferred, in the PDB order.

**to\_openeye**(*aromaticity\_model*='OEAroModel\_MDL')

Create an OpenEye molecule

Requires the OpenEye toolkit to be installed.

#### Parameters

**aromaticity\_model** [str, optional, default=DEFAULT\_AROMATICITY\_MODEL] The aromaticity model to use

#### Returns

**oemol** [openeye.oechem.OEMol] An OpenEye molecule

### Examples

Create an OpenEye molecule from a Molecule

```
>>> molecule = Molecule.from_smiles('CC')
>>> oemol = molecule.to_openeye()
```

**get\_bond\_between**(*i*, *j*)

Returns the bond between two atoms

#### Parameters

**i, j** [int or Atom] Atoms or atom indices to check

#### Returns

**bond** [Bond] The bond between i and j.

**property rings**

Return the number of rings in this molecule.

Requires the RDKit to be installed.

---

**Note:** For systems containing some special cases of connected rings, this function may not be well-behaved and may report a different number rings than expected. Some problematic cases include networks of many (5+) rings or bicyclic moieties (i.e. norbornane).

---

**classmethod** `from_bson(serialized)`

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_json(serialized)`

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_messagepack(serialized)`

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_pickle(serialized)`

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_toml(serialized)`

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**openforcefield.topology.Molecule**

**class** openforcefield.topology.**Molecule**(\*args, \*\*kwargs)

Mutable chemical representation of a molecule, such as a small molecule or biopolymer.

**Examples**

Create a molecule from an sdf file

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
```

Convert to OpenEye OEMol object

```
>>> oemol = molecule.to_openeye()
```

Create a molecule from an OpenEye molecule

```
>>> molecule = Molecule.from_openeye(oemol)
```

Convert to RDKit Mol object

```
>>> rdmol = molecule.to_rdkit()
```

Create a molecule from an RDKit molecule

```
>>> molecule = Molecule.from_rdkit(rdmol)
```

Create a molecule from IUPAC name (requires the OpenEye toolkit)

```
>>> molecule = Molecule.from_iupac('imatinib')
```

Create a molecule from SMILES

```
>>> molecule = Molecule.from_smiles('Cc1ccccc1')
```

**Warning:** This API is experimental and subject to change.

### Attributes

- angles** Get an iterator over all i-j-k angles.
- atoms** Iterate over all Atom objects.
- bonds** Iterate over all Bond objects.
- conformers** Returns the list of conformers for this molecule.
- has\_unique\_atom\_names** True if the molecule has unique atom names, False otherwise.
- hill\_formula** Get the Hill formula of the molecule
- impropers** Iterate over all proper torsions in the molecule
- n\_angles** int: number of angles in the Molecule.
- n\_atoms** The number of Atom objects.
- n\_bonds** The number of Bond objects.
- n\_conformers** Returns the number of conformers for this molecule.
- n\_impropers** int: number of improper torsions in the Molecule.
- n\_particles** The number of Particle objects, which corresponds to how many positions must be used.
- n\_propers** int: number of proper torsions in the Molecule.
- n\_rings** Return the number of rings found in the Molecule
- n\_virtual\_particles** The number of VirtualParticle objects.
- n\_virtual\_sites** The number of VirtualSite objects.
- name** The name (or title) of the molecule
- partial\_charges** Returns the partial charges (if present) on the molecule.
- particles** Iterate over all Particle objects.
- propers** Iterate over all proper torsions in the molecule
- properties** The properties dictionary of the molecule
- rings** Return the number of rings in this molecule.
- torsions** Get an iterator over all i-j-k-l torsions.

**total\_charge** Return the total charge on the molecule

**virtual\_sites** Iterate over all VirtualSite objects.

## Methods

<code>add_atom(atomic_number, formal_charge, ...)</code>	Add an atom
<code>add_bond(atom1, atom2, bond_order, is_aromatic)</code>	Add a bond between two specified atom indices
<code>add_bond_charge_virtual_site(atoms, ...)</code>	Create a bond charge-type virtual site, in which the location of the charge is specified by the position of two atoms. This supports placement of a virtual site S along a vector between two specified atoms, e.g. to allow for a sigma hole for halogens or similar contexts. With positive values of the distance, the virtual site lies outside the first indexed atom. Parameters ——— atoms : list of openforcefield.topology.molecule.Atom objects or ints of shape [N The atoms defining the virtual site's position or their indices distance : float.
<code>add_conformer(coordinates)</code>	Add a conformation of the molecule
<code>add_divalent_lone_pair_virtual_site(atoms, ...)</code>	Create a divalent lone pair-type virtual site, in which the location of the charge is specified by the position of three atoms.
<code>add_monovalent_lone_pair_virtual_site(atoms, ...)</code>	Create a bond charge-type virtual site, in which the location of the charge is specified by the position of three atoms.
<code>add_trivalent_lone_pair_virtual_site(atoms, ...)</code>	Create a trivalent lone pair-type virtual site, in which the location of the charge is specified by the position of four atoms.
<code>are_isomorphic(mol1, mol2[, ...])</code>	Determines whether the two molecules are isomorphic by comparing their graph representations and the chosen node/edge attributes.
<code>assign_fractional_bond_orders([...])</code>	Update and store list of bond orders this molecule.
<code>assign_partial_charges(partial_charge_method)</code>	Calculate partial atomic charges for this molecule using an underlying toolkit, and assign the new values to the <code>partial_charges</code> attribute.
<code>canonical_order_atoms([toolkit_registry])</code>	Canonical order the atoms in a copy of the molecule using a toolkit, returns a new copy.
<code>chemical_environment_matches(query[, ...])</code>	Retrieve all matches for a given chemical environment query.
<code>compute_partial_charges_am1bcc([...])</code>	Calculate partial atomic charges for this molecule using AM1-BCC run by an underlying toolkit and assign them to this molecule's <code>partial_charges</code> attribute.
<code>enumerate_protomers([max_states])</code>	Enumerate the formal charges of a molecule to generate different protomoers.
<code>enumerate_stereoisomers([undefined_only, ...])</code>	Enumerate the stereocenters and bonds of the current molecule.

continues on next page



Table 5 – continued from previous page

<code>enumerate_tautomers([max_states, ...])</code>	Enumerate the possible tautomers of the current molecule
<code>find_rotatable_bonds([...])</code>	Find all bonds classed as rotatable ignoring any matched to the <code>ignore_functional_groups</code> list.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(molecule_dict)</code>	Create a new Molecule from a dictionary representation
<code>from_file(file_path[, file_format, ...])</code>	Create one or more molecules from a file
<code>from_inchi(inchi[, allow_undefined_stereo, ...])</code>	Construct a Molecule from a InChI representation
<code>from_iupac(iupac_name[, toolkit_registry, ...])</code>	Generate a molecule from IUPAC or common name
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_mapped_smiles(mapped_smiles[, ...])</code>	Create an <code>openforcefield.topology.molecule.Molecule</code> from a mapped SMILES made with <code>cmiles</code> .
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_openeye(*args, **kwargs)</code>	Create a Molecule from an OpenEye molecule.
<code>from_pdb_and_smiles(file_path, smiles[, ...])</code>	Create a Molecule from a pdb file and a SMILES string using RDKit.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_qcschema(qca_record[, client, ...])</code>	Create a Molecule from a QCArchive entry based on the <code>cmiles</code> information.
<code>from_rdkit(*args, **kwargs)</code>	Create a Molecule from an RDKit molecule.
<code>from_smiles(smiles[, ...])</code>	Construct a Molecule from a SMILES representation
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_topology(topology)</code>	Return a Molecule representation of an <code>openforcefield.Topology</code> containing a single Molecule object.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>generate_conformers([toolkit_registry, ...])</code>	Generate conformers for this molecule using an underlying toolkit.
<code>generate_unique_atom_names()</code>	Generate unique atom names using element name and number of times that element has occurred e.g.
<code>get_bond_between(i, j)</code>	Returns the bond between two atoms
<code>is_isomorphic_with(other, **kwargs)</code>	Check if the molecule is isomorphic with the other molecule which can be an <code>openforcefield.topology.Molecule</code> , or <code>TopologyMolecule</code> or <code>nx.Graph()</code> .
<code>remap(mapping_dict[, current_to_new])</code>	Remap all of the indexes in the molecule to match the given mapping dict

continues on next page

Table 5 – continued from previous page

<code>strip_atom_stereochemistry(smarts[, ...])</code>	Delete stereochemistry information for certain atoms, if it is present.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dictionary representation of the molecule.
<code>to_file(file_path, file_format[, ...])</code>	Write the current molecule to a file or file-like object
<code>to_hill_formula(molecule)</code>	Generate the Hill formula from either a Frozen-Molecule, TopologyMolecule or nx.Graph() of the molecule
<code>to_inchi([fixed_hydrogens, toolkit_registry])</code>	Create an InChI string for the molecule using the requested toolkit backend.
<code>to_inchikey([fixed_hydrogens, toolkit_registry])</code>	Create an InChIKey for the molecule using the requested toolkit backend.
<code>to_iupac([toolkit_registry])</code>	Generate IUPAC name from Molecule
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_networkx()</code>	Generate a NetworkX undirected graph from the Molecule.
<code>to_openeye([aromaticity_model])</code>	Create an OpenEye molecule
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_qcschema([multiplicity, conformer, extras])</code>	Generate the qschema input format used to submit jobs to archive or run qcengine calculations locally, spec can be found here < <a href="https://molssi-qc-schema.readthedocs.io/en/latest/index.html">https://molssi-qc-schema.readthedocs.io/en/latest/index.html</a> >
<code>to_rdkit([aromaticity_model])</code>	Create an RDKit molecule
<code>to_smiles([isomeric, explicit_hydrogens, ...])</code>	Return a canonical isomeric SMILES representation of the current molecule.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_topology()</code>	Return an openforcefield Topology representation containing one copy of this molecule
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.
<code>visualize([backend, width, height])</code>	Render a visualization of the molecule in Jupyter

`__init__(*args, **kwargs)`

Create a new Molecule object

#### Parameters

**other** [optional, default=None] If specified, attempt to construct a copy of the Molecule from the specified object. This can be any one of the following:

- a `Molecule` object
- a file that can be used to construct a `Molecule` object
- an `openeye.ochem.OEMol`
- an `rdkit.Chem.rdchem.Mol`
- a serialized `Molecule` object

## Examples

Create an empty molecule:

```
>>> empty_molecule = Molecule()
```

Create a molecule from a file that can be used to construct a molecule, using either a filename or file-like object:

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
>>> molecule = Molecule(open(sdf_filepath, 'r'), file_format='sdf')
```

```
>>> import gzip
>>> mol2_gz_filepath = get_data_file_path('molecules/toluene.mol2.gz')
>>> molecule = Molecule(gzip.GzipFile(mol2_gz_filepath, 'r'), file_format='mol2')
```

Create a molecule from another molecule:

```
>>> molecule_copy = Molecule(molecule)
```

Convert to OpenEye OEMol object

```
>>> oemol = molecule.to_openeye()
```

Create a molecule from an OpenEye molecule:

```
>>> molecule = Molecule(oemol)
```

Convert to RDKit Mol object

```
>>> rdmol = molecule.to_rdkit()
```

Create a molecule from an RDKit molecule:

```
>>> molecule = Molecule(rdmol)
```

Create a molecule from a serialized molecule object:

```
>>> serialized_molecule = molecule.__getstate__()
>>> molecule_copy = Molecule(serialized_molecule)
```

## Methods

<code>__init__(*args, **kwargs)</code>	Create a new Molecule object
<code>add_atom(atomic_number, formal_charge, ...)</code>	Add an atom
<code>add_bond(atom1, atom2, bond_order, is_aromatic)</code>	Add a bond between two specified atom indices

continues on next page

Table 6 – continued from previous page

<code>add_bond_charge_virtual_site(atoms, ...)</code>	Create a bond charge-type virtual site, in which the location of the charge is specified by the position of two atoms. This supports placement of a virtual site <i>S</i> along a vector between two specified atoms, e.g. to allow for a sigma hole for halogens or similar contexts. With positive values of the distance, the virtual site lies outside the first indexed atom. Parameters ——— atoms : list of openforcefield.topology.molecule.Atom objects or ints of shape [N] The atoms defining the virtual site's position or their indices distance : float.
<code>add_conformer(coordinates)</code>	Add a conformation of the molecule
<code>add_divalent_lone_pair_virtual_site(atoms, ...)</code>	Create a divalent lone pair-type virtual site, in which the location of the charge is specified by the position of three atoms.
<code>add_monovalent_lone_pair_virtual_site(atoms, ...)</code>	Create a bond charge-type virtual site, in which the location of the charge is specified by the position of three atoms.
<code>add_trivalent_lone_pair_virtual_site(atoms, ...)</code>	Create a trivalent lone pair-type virtual site, in which the location of the charge is specified by the position of four atoms.
<code>are_isomorphic(mol1, mol2[, ...])</code>	Determines whether the two molecules are isomorphic by comparing their graph representations and the chosen node/edge attributes.
<code>assign_fractional_bond_orders([...])</code>	Update and store list of bond orders this molecule.
<code>assign_partial_charges(partial_charge_method)</code>	Calculate partial atomic charges for this molecule using an underlying toolkit, and assign the new values to the <code>partial_charges</code> attribute.
<code>canonical_order_atoms([toolkit_registry])</code>	Canonical order the atoms in a copy of the molecule using a toolkit, returns a new copy.
<code>chemical_environment_matches(query[, ...])</code>	Retrieve all matches for a given chemical environment query.
<code>compute_partial_charges_am1bcc([...])</code>	Calculate partial atomic charges for this molecule using AM1-BCC run by an underlying toolkit and assign them to this molecule's <code>partial_charges</code> attribute.
<code>enumerate_protomers([max_states])</code>	Enumerate the formal charges of a molecule to generate different protomers.
<code>enumerate_stereoisomers([undefined_only, ...])</code>	Enumerate the stereocenters and bonds of the current molecule.
<code>enumerate_tautomers([max_states, ...])</code>	Enumerate the possible tautomers of the current molecule
<code>find_rotatable_bonds([...])</code>	Find all bonds classed as rotatable ignoring any matched to the <code>ignore_functional_groups</code> list.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(molecule_dict)</code>	Create a new Molecule from a dictionary representation
<code>from_file(file_path[, file_format, ...])</code>	Create one or more molecules from a file

continues on next page

Table 6 – continued from previous page

<code>from_inchi(inchi[, allow_undefined_stereo, ...])</code>	Construct a Molecule from a InChI representation
<code>from_iupac(iupac_name[, toolkit_registry, ...])</code>	Generate a molecule from IUPAC or common name
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_mapped_smiles(mapped_smiles[, ...])</code>	Create an openforcefield.topology.molecule.Molecule from a mapped SMILES made with cmiles.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_openeye(*args, **kwargs)</code>	Create a Molecule from an OpenEye molecule.
<code>from_pdb_and_smiles(file_path, smiles[, ...])</code>	Create a Molecule from a pdb file and a SMILES string using RDKit.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_qcschema(qca_record[, client, ...])</code>	Create a Molecule from a QCArchive entry based on the cmiles information.
<code>from_rdkit(*args, **kwargs)</code>	Create a Molecule from an RDKit molecule.
<code>from_smiles(smiles[, ...])</code>	Construct a Molecule from a SMILES representation
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_topology(topology)</code>	Return a Molecule representation of an openforcefield Topology containing a single Molecule object.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>generate_conformers([toolkit_registry, ...])</code>	Generate conformers for this molecule using an underlying toolkit.
<code>generate_unique_atom_names()</code>	Generate unique atom names using element name and number of times that element has occurred e.g.
<code>get_bond_between(i, j)</code>	Returns the bond between two atoms
<code>is_isomorphic_with(other, **kwargs)</code>	Check if the molecule is isomorphic with the other molecule which can be an openforcefield.topology.Molecule, or TopologyMolecule or nx.Graph().
<code>remap(mapping_dict[, current_to_new])</code>	Remap all of the indexes in the molecule to match the given mapping dict
<code>strip_atom_stereochemistry(smarts[, ...])</code>	Delete stereochemistry information for certain atoms, if it is present.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dictionary representation of the molecule.
<code>to_file(file_path, file_format[, ...])</code>	Write the current molecule to a file or file-like object

continues on next page

Table 6 – continued from previous page

<code>to_hill_formula(molecule)</code>	Generate the Hill formula from either a Frozen-Molecule, TopologyMolecule or nx.Graph() of the molecule
<code>to_inchi([fixed_hydrogens, toolkit_registry])</code>	Create an InChI string for the molecule using the requested toolkit backend.
<code>to_inchikey([fixed_hydrogens, toolkit_registry])</code>	Create an InChIKey for the molecule using the requested toolkit backend.
<code>to_iupac([toolkit_registry])</code>	Generate IUPAC name from Molecule
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_networkx()</code>	Generate a NetworkX undirected graph from the Molecule.
<code>to_openeye([aromaticity_model])</code>	Create an OpenEye molecule
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_qcschema([multiplicity, conformer, extras])</code>	Generate the qschema input format used to submit jobs to archive or run qcengine calculations locally, spec can be found here < <a href="https://molssi-qc-schema.readthedocs.io/en/latest/index.html">https://molssi-qc-schema.readthedocs.io/en/latest/index.html</a> >
<code>to_rdkit([aromaticity_model])</code>	Create an RDKit molecule
<code>to_smiles([isomeric, explicit_hydrogens, ...])</code>	Return a canonical isomeric SMILES representation of the current molecule.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_topology()</code>	Return an openforcefield Topology representation containing one copy of this molecule
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.
<code>visualize([backend, width, height])</code>	Render a visualization of the molecule in Jupyter

### Attributes

<code>angles</code>	Get an iterator over all i-j-k angles.
<code>atoms</code>	Iterate over all Atom objects.
<code>bonds</code>	Iterate over all Bond objects.
<code>conformers</code>	Returns the list of conformers for this molecule.
<code>has_unique_atom_names</code>	True if the molecule has unique atom names, False otherwise.
<code>hill_formula</code>	Get the Hill formula of the molecule
<code>impropers</code>	Iterate over all proper torsions in the molecule
<code>n_angles</code>	int: number of angles in the Molecule.
<code>n_atoms</code>	The number of Atom objects.
<code>n_bonds</code>	The number of Bond objects.
<code>n_conformers</code>	Returns the number of conformers for this molecule.
<code>n_impropers</code>	int: number of improper torsions in the Molecule.
<code>n_particles</code>	The number of Particle objects, which corresponds to how many positions must be used.
<code>n_propers</code>	int: number of proper torsions in the Molecule.

continues on next page

Table 7 – continued from previous page

<code>n_rings</code>	Return the number of rings found in the Molecule
<code>n_virtual_particles</code>	The number of VirtualParticle objects.
<code>n_virtual_sites</code>	The number of VirtualSite objects.
<code>name</code>	The name (or title) of the molecule
<code>partial_charges</code>	Returns the partial charges (if present) on the molecule.
<code>particles</code>	Iterate over all Particle objects.
<code>propers</code>	Iterate over all proper torsions in the molecule
<code>properties</code>	The properties dictionary of the molecule
<code>rings</code>	Return the number of rings in this molecule.
<code>torsions</code>	Get an iterator over all i-j-k-l torsions.
<code>total_charge</code>	Return the total charge on the molecule
<code>virtual_sites</code>	Iterate over all VirtualSite objects.

**add\_atom**(*atomic\_number*, *formal\_charge*, *is\_aromatic*, *stereochemistry*=None, *name*=None)

Add an atom

#### Parameters

**atomic\_number** [int] Atomic number of the atom

**formal\_charge** [int] Formal charge of the atom

**is\_aromatic** [bool] If True, atom is aromatic; if False, not aromatic

**stereochemistry** [str, optional, default=None] Either 'R' or 'S' for specified stereochemistry, or None if stereochemistry is irrelevant

**name** [str, optional, default=None] An optional name for the atom

#### Returns

**index** [int] The index of the atom in the molecule

#### Examples

Define a methane molecule

```
>>> molecule = Molecule()
>>> molecule.name = 'methane'
>>> C = molecule.add_atom(6, 0, False)
>>> H1 = molecule.add_atom(1, 0, False)
>>> H2 = molecule.add_atom(1, 0, False)
>>> H3 = molecule.add_atom(1, 0, False)
>>> H4 = molecule.add_atom(1, 0, False)
>>> bond_idx = molecule.add_bond(C, H1, False, 1)
>>> bond_idx = molecule.add_bond(C, H2, False, 1)
>>> bond_idx = molecule.add_bond(C, H3, False, 1)
>>> bond_idx = molecule.add_bond(C, H4, False, 1)
```

**add\_bond\_charge\_virtual\_site**(*atoms*, *distance*, *\*\*kwargs*)

Create a bond charge-type virtual site, in which the location of the charge is specified by the position of two atoms. This supports placement of a virtual site S along a vector between two specified atoms, e.g. to allow for a sigma hole for halogens or similar contexts. With positive values of the distance, the virtual site lies outside the first indexed atom. Parameters ———  
*atoms* : list of openforcefield.topology.molecule.Atom objects or ints of shape [N]

The atoms defining the virtual site's position or their indices

**distance** : float

**weights** [list of floats of shape [N] or None, optional, default=None] **weights**[index] is the weight of **particles**[index] contributing to the position of the virtual site. Default is None

**charge\_increments** [list of floats of shape [N], optional, default=None] The amount of charge to remove from the VirtualSite's atoms and put in the VirtualSite. Indexing in this list should match the ordering in the atoms list. Default is None.

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] Rmin\_half term for VdW properties of virtual site. Default is None.

**name** [string or None, default=""] The name of this virtual site. Default is "".

**symmetric** [bool, default=True] Whether to make virtual site symmetric by creating two particles instead of just one. As an example, for N\_2 this should be set to True to model both lone pairs with the same parameters.

#### Returns

**index** [int] The index of the newly-added virtual site in the molecule

**add\_monovalent\_lone\_pair\_virtual\_site**(*atoms*, *distance*, *out\_of\_plane\_angle*, *in\_plane\_angle*,  
\*\**kwargs*)

Create a bond charge-type virtual site, in which the location of the charge is specified by the position of three atoms.

#### Parameters

**atoms** [list of three openforcefield.topology.molecule.Atom objects or ints] The three atoms defining the virtual site's position or their molecule atom indices

**distance** [float]

**out\_of\_plane\_angle** [float]

**in\_plane\_angle** [float]

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] Rmin\_half term for VdW properties of virtual site. Default is None.

**name** [string or None, default=""] The name of this virtual site. Default is "".

**symmetric** [bool, default=False] Whether to make virtual site symmetric by creating two particles instead of just one. Note that because this site is defined is placed on the noncentral atom, setting this to True will place one particle on atom1, and the other on atom3.

#### Returns

**index** [int] The index of the newly-added virtual site in the molecule

**add\_divalent\_lone\_pair\_virtual\_site**(*atoms*, *distance*, *out\_of\_plane\_angle*, \*\**kwargs*)

Create a divalent lone pair-type virtual site, in which the location of the charge is specified by the position of three atoms.



**Parameters**

**atoms** [list of 3 openforcefield.topology.molecule.Atom objects or ints] The three atoms defining the virtual site's position or their molecule atom indices

**distance** [float]

**out\_of\_plane\_angle** [float]

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] Rmin\_half term for VdW properties of virtual site. Default is None.

**name** [string or None, default=""] The name of this virtual site. Default is "".

**symmetric** [bool, default=True] Whether to make virtual site symmetric by creating two particles instead of just one. As an example, for TIP5 should be set to True to model both lone pairs with the same parameters.

**Returns**

**index** [int] The index of the newly-added virtual site in the molecule

**add\_trivalent\_lone\_pair\_virtual\_site**(atoms, distance, \*\*kwargs)

Create a trivalent lone pair-type virtual site, in which the location of the charge is specified by the position of four atoms.

**Parameters**

**atoms** [list of 4 openforcefield.topology.molecule.Atom objects or ints] The three atoms defining the virtual site's position or their molecule atom indices

**distance** [float]

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] Rmin\_half term for VdW properties of virtual site. Default is None.

**name** [string or None, default=""] The name of this virtual site. Default is "".

**Returns**

**index** [int] The index of the newly-added virtual site in the molecule

**add\_bond**(atom1, atom2, bond\_order, is\_aromatic, stereochemistry=None, fractional\_bond\_order=None)

Add a bond between two specified atom indices

**Parameters**

**atom1** [int or openforcefield.topology.molecule.Atom] Index of first atom

**atom2** [int or openforcefield.topology.molecule.Atom] Index of second atom

**bond\_order** [int] Integral bond order of Kekulized form

**is\_aromatic** [bool] True if this bond is aromatic, False otherwise

**stereochemistry** [str, optional, default=None] Either 'E' or 'Z' for specified stereochemistry, or None if stereochemistry is irrelevant

**fractional\_bond\_order** [float, optional, default=None] The fractional (eg. Wiberg) bond order

#### Returns

**index: int** Index of the bond in this molecule

**add\_conformer**(*coordinates*)

Add a conformation of the molecule

#### Parameters

**coordinates: simtk.unit.Quantity(np.array) with shape (n\_atoms, 3) and dimension of distance**  
Coordinates of the new conformer, with the first dimension of the array corresponding to the atom index in the Molecule's indexing system.

#### Returns

**index: int** The index of this conformer

#### property angles

Get an iterator over all i-j-k angles.

**static are\_isomorphic**(*mol1*, *mol2*, *return\_atom\_map=False*, *aromatic\_matching=True*, *formal\_charge\_matching=True*, *bond\_order\_matching=True*, *atom\_stereochemistry\_matching=True*, *bond\_stereochemistry\_matching=True*, *strip\_pyrimidal\_n\_atom\_stereo=True*, *toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Determines whether the two molecules are isomorphic by comparing their graph representations and the chosen node/edge attributes. Minimally connections and atomic\_number are checked.

If nx.Graphs() are given they must at least have atomic\_number attributes on nodes. other optional attributes for nodes are: is\_aromatic, formal\_charge and stereochemistry. optional attributes for edges are: is\_aromatic, bond\_order and stereochemistry.

**Warning:** This API is experimental and subject to change.

#### Parameters

**mol1** [an openforcefield.topology.molecule.FrozenMolecule or TopologyMolecule or nx.Graph()]

**mol2** [an openforcefield.topology.molecule.FrozenMolecule or TopologyMolecule or nx.Graph()] The molecule to test for isomorphism.

**return\_atom\_map: bool, default=False, optional** will return an optional dict containing the atomic mapping.

**aromatic\_matching: bool, default=True, optional** compare the aromatic attributes of bonds and atoms.

**formal\_charge\_matching: bool, default=True, optional** compare the formal charges attributes of the atoms.

**bond\_order\_matching: bool, default=True, optional** compare the bond order on attributes of the bonds.

**atom\_stereochemistry\_matching** [bool, default=True, optional] If False, atoms' stereochemistry is ignored for the purpose of determining equality.

**bond\_stereochemistry\_matching** [bool, default=True, optional] If False, bonds' stereochemistry is ignored for the purpose of determining equality.

**strip\_pyrimidal\_n\_atom\_stereo**: bool, default=True, optional If True, any stereochemistry defined around pyrimidal nitrogen stereocenters will be disregarded in the isomorphism check.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for removing stereochemistry from pyrimidal nitrogens.

#### Returns

**molecules\_are\_isomorphic** [bool]

**atom\_map** [default=None, Optional,] [Dict[int,int]] ordered by mol1 indexing {mol1\_index: mol2\_index} If molecules are not isomorphic given input arguments, will return None instead of dict.

**assign\_fractional\_bond\_orders**(*bond\_order\_model=None*, *toolkit\_registry=ToolkitRegistry*  
containing *The RDKit, AmberTools, Built-in Toolkit*,  
*use\_conformers=None*)

Update and store list of bond orders this molecule. Bond orders are stored on each bond, in the *bond.fractional\_bond\_order* attribute.

**Warning:** This API is experimental and subject to change.

#### Parameters

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

**bond\_order\_model** [string, optional. Default=None] The bond order model to use for fractional bond order calculation. If None, "am1-wiberg" will be used.

**use\_conformers** [iterable of simtk.unit.Quantity(np.array) with shape (n\_atoms, 3) and dimension of distance, optional, default=None] The conformers to use for fractional bond order calculation. If None, an appropriate number of conformers will be generated by an available ToolkitWrapper.

#### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the toolkit\_registry parameter

#### Examples

```
>>> molecule = Molecule.from_smiles('CCCCC')
>>> molecule.assign_fractional_bond_orders()
```

**assign\_partial\_charges**(*partial\_charge\_method*, *strict\_n\_conformers=False*,  
*use\_conformers=None*, *toolkit\_registry=ToolkitRegistry* containing  
*The RDKit, AmberTools, Built-in Toolkit*)

Calculate partial atomic charges for this molecule using an underlying toolkit, and assign the new values to the *partial\_charges* attribute.

### Parameters

**partial\_charge\_method** [string] The partial charge calculation method to use for partial charge calculation.

**strict\_n\_conformers** [bool, default=False] Whether to raise an exception if an invalid number of conformers is provided for the given charge method. If this is False and an invalid number of conformers is found, a warning will be raised.

**use\_conformers** [iterable of simtk.unit.Quantity-wrapped numpy arrays, each with shape (n\_atoms, 3) and dimension of distance. Optional, default=None] Coordinates to use for partial charge calculation. If None, an appropriate number of conformers will be generated.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for the calculation.

### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the toolkit\_registry parameter

### Examples

```
>>> molecule = Molecule.from_smiles('CCCCC')
>>> molecule.assign_partial_charges('am1-mulliken')
```

### property atoms

Iterate over all Atom objects.

### property bonds

Iterate over all Bond objects.

**canonical\_order\_atoms**(*toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Canonical order the atoms in a copy of the molecule using a toolkit, returns a new copy.

**Warning:** This API is experimental and subject to change.

### Parameters

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

### Returns

**molecule** [openforcefield.topology.Molecule] An new openforcefield-style molecule with atoms in the canonical order.

**chemical\_environment\_matches**(*query, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Retrieve all matches for a given chemical environment query.

### Parameters

**query** [str or ChemicalEnvironment] SMARTS string (with one or more tagged atoms) or ChemicalEnvironment query. Query will internally be resolved to SMIRKS using `query.asSMIRKS()` if it has an `.asSMIRKS` method.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=GLOBAL\_TOOLKIT\_REGISTRY] ToolkitRegistry or ToolkitWrapper to use for chemical environment matches

### Returns

**matches** [list of atom index tuples] A list of tuples, containing the indices of the matching atoms.

### Examples

Retrieve all the carbon-carbon bond matches in a molecule

```
>>> molecule = Molecule.from_iupac('imatinib')
>>> matches = molecule.chemical_environment_matches('[#6X3:1]~[#6X3:2]')
```

**compute\_partial\_charges\_am1bcc**(*use\_conformers=None*, *strict\_n\_conformers=False*, *toolkit\_registry=ToolkitRegistry containing The RDKit, Amber-Tools, Built-in Toolkit*)

Calculate partial atomic charges for this molecule using AM1-BCC run by an underlying toolkit and assign them to this molecule's `partial_charges` attribute.

### Parameters

**strict\_n\_conformers** [bool, default=False] Whether to raise an exception if an invalid number of conformers is provided for the given charge method. If this is False and an invalid number of conformers is found, a warning will be raised.

**use\_conformers** [iterable of simtk.unit.Quantity-wrapped numpy arrays, each with shape (n\_atoms, 3) and dimension of distance. Optional, default=None] Coordinates to use for partial charge calculation. If None, an appropriate number of conformers for the given charge method will be generated.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for the calculation

### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the `toolkit_registry` parameter

### Examples

```
>>> molecule = Molecule.from_smiles('CCCCC')
>>> molecule.generate_conformers()
>>> molecule.compute_partial_charges_am1bcc()
```

### property conformers

Returns the list of conformers for this molecule. This returns a list of simtk.unit.Quantity-wrapped numpy arrays, of shape (3 x n\_atoms) and with dimensions of distance. The return value is the actual list of conformers, and changes to the contents affect the original FrozenMolecule.

**enumerate\_protomers**(*max\_states=10*)

Enumerate the formal charges of a molecule to generate different protomoers.

**Parameters**

**max\_states:** **int optional, default=10**, The maximum number of protomer states to be returned.

**Returns**

**molecules:** **List[openforcefield.topology.Molecule]**, A list of the protomers of the input molecules not including the input.

**enumerate\_stereoisomers**(*undefined\_only=False, max\_isomers=20, rationalise=True, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Enumerate the stereocenters and bonds of the current molecule.

**Parameters**

**undefined\_only:** **bool optional, default=False** If we should enumerate all stereocenters and bonds or only those with undefined stereochemistry

**max\_isomers:** **int optional, default=20** The maximum amount of molecules that should be returned

**rationalise:** **bool optional, default=True** If we should try to build and rationalise the molecule to ensure it can exist

**toolkit\_registry:** **openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitV**

**optional, default=GLOBAL\_TOOLKIT\_REGISTRY** *ToolkitRegistry* or *ToolkitWrapper* to use to enumerate the stereoisomers.

**Returns**

**molecules:** **List[openforcefield.topology.Molecule]** A list of openforcefield.topology.Molecule instances not including the input molecule.

**enumerate\_tautomers**(*max\_states=20, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Enumerate the possible tautomers of the current molecule

**Parameters**

**max\_states:** **int optional, default=20** The maximum amount of molecules that should be returned

**toolkit\_registry:** **openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitV**

**optional, default=GLOBAL\_TOOLKIT\_REGISTRY** *ToolkitRegistry* or *ToolkitWrapper* to use to enumerate the tautomers.

**Returns**

**molecules:** **List[openforcefield.topology.Molecule]** A list of openforcefield.topology.Molecule instances not including the input molecule.

**find\_rotatable\_bonds**(*ignore\_functional\_groups=None, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Find all bonds classed as rotatable ignoring any matched to the ignore\_functional\_groups list.

**Parameters**

**ignore\_functional\_groups:** optional, List[str], default=None, A list of bond SMARTS patterns to be ignored when finding rotatable bonds.

**toolkit\_registry:** openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper to use for SMARTS matching

#### Returns

**bonds:** List[openforcefield.topology.molecule.Bond] The list of openforcefield.topology.molecule.Bond instances which are rotatable.

**classmethod from\_bson(serialized)**

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

#### Parameters

**serialized** [bytes] A BSON serialized representation of the object

#### Returns

**instance** [cls] An instantiated object

**classmethod from\_dict(molecule\_dict)**

Create a new Molecule from a dictionary representation

#### Parameters

**molecule\_dict** [OrderedDict] A dictionary representation of the molecule.

#### Returns

**molecule** [Molecule] A Molecule created from the dictionary representation

**static from\_file(file\_path, file\_format=None, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, allow\_undefined\_stereo=False)**

Create one or more molecules from a file

#### Parameters

**file\_path** [str or file-like object] The path to the file or file-like object to stream one or more molecules from.

**file\_format** [str, optional, default=None] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for your loaded toolkits for details.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper,]

**optional, default=GLOBAL\_TOOLKIT\_REGISTRY** ToolkitRegistry or ToolkitWrapper to use for file loading. If a Toolkit is passed, only the highest-precedence toolkit is used

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecules** [Molecule or list of Molecules] If there is a single molecule in the file, a Molecule is returned; otherwise, a list of Molecule objects is returned.

## Examples

```
>>> from openforcefield.tests.utils import get_monomer_mol2_file_path
>>> mol2_file_path = get_monomer_mol2_file_path('cyclohexane')
>>> molecule = Molecule.from_file(mol2_file_path)
```

**static from\_inchi**(*inchi*, *allow\_undefined\_stereo*=False, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Construct a Molecule from a InChI representation

### Parameters

**inchi** [str] The InChI representation of the molecule.

**allow\_undefined\_stereo** [bool, default=False] Whether to accept InChI with undefined stereochemistry. If False, an exception will be raised if a InChI with undefined stereochemistry is passed into this function.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for InChI-to-molecule conversion

### Returns

**molecule** [openforcefield.topology.Molecule]

## Examples

make cis-1,2-Dichloroethene >>> molecule = Molecule.from\_inchi('InChI=1S/C2H2Cl2/c3-1-2-4/h1-2H/b2-1-')

**classmethod from\_iupac**(*iupac\_name*, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*, *allow\_undefined\_stereo*=False, *\*\*kwargs*)

Generate a molecule from IUPAC or common name

### Parameters

**iupac\_name** [str] IUPAC name of molecule to be generated

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=GLOBAL\_TOOLKIT\_REGISTRY] ToolkitRegistry or ToolkitWrapper to use for chemical environment matches

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if molecule contains undefined stereochemistry.

### Returns

**molecule** [Molecule] The resulting molecule with position

---

**Note:** This method requires the OpenEye toolkit to be installed. ..

---



## Examples

Create a molecule from an IUPAC name

```
>>> molecule = Molecule.from_iupac('4-[(4-methylpiperazin-1-yl)methyl]-N-(4-methyl-3-[(4-  
→(pyridin-3-yl)pyrimidin-2-yl]amino}phenyl)benzamide')
```

Create a molecule from a common name

```
>>> molecule = Molecule.from_iupac('imatinib')
```

**classmethod** `from_json(serialized)`

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

### Parameters

**serialized** [str] A JSON serialized representation of the object

### Returns

**instance** [cls] An instantiated object

**classmethod** `from_mapped_smiles(mapped_smiles, toolkit_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, allow_undefined_stereo=False)`

Create an openforcefield.topology.molecule.Molecule from a mapped SMILES made with cmiles. The molecule will be in the order of the indexing in the mapped smiles string.

**Warning:** This API is experimental and subject to change.

### Parameters

**mapped\_smiles**: str, A CMILES-style mapped smiles string with explicit hydrogens.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

### Returns

**offmol** [openforcefield.topology.molecule.Molecule] An openforcefiled molecule instance.

### Raises

**SmilesParsingError** [if the given SMILES had no indexing picked up by the toolkits.]

**classmethod** `from_messagepack(serialized)`

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

### Parameters

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

### Returns

**instance** [cls] Instantiated object.

**static from\_openeye**(\*args, \*\*kwargs)

Create a Molecule from an OpenEye molecule.

Requires the OpenEye toolkit to be installed.

#### Parameters

**oemol** [openeye.oechem.OEMol] An OpenEye molecule

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecule** [openforcefield.topology.Molecule] An openforcefield molecule

### Examples

Create a Molecule from an OpenEye OEMol

```
>>> from openeye import oechem
>>> from openforcefield.tests.utils import get_data_file_path
>>> ifs = oechem.oemolistream(get_data_file_path('systems/monomers/ethanol.mol2'))
>>> oemols = list(ifs.GetOEGraphMols())
>>> molecule = Molecule.from_openeye(oemols[0])
```

**classmethod from\_pdb\_and\_smiles**(file\_path, smiles, allow\_undefined\_stereo=False)

Create a Molecule from a pdb file and a SMILES string using RDKit.

Requires RDKit to be installed.

**Warning:** This API is experimental and subject to change.

The molecule is created and sanitised based on the SMILES string, we then find a mapping between this molecule and one from the PDB based only on atomic number and connections. The SMILES molecule is then reindex to match the PDB, the conformer is attached and the molecule returned.

#### Parameters

**file\_path:** str PDB file path

**smiles** [str] a valid smiles string for the pdb, used for seterochemistry and bond order

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecule** [openforcefield.Molecule] An OFFMol instance with ordering the same as used in the PDB file.

#### Raises

**InvalidConformerError** [if the SMILES and PDB molecules are not isomorphic.]

**classmethod** `from_pickle(serialized)`

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

#### Parameters

**serialized** [str] A pickled representation of the object

#### Returns

**instance** [cls] An instantiated object

**classmethod** `from_qcschema(qca_record, client=None, toolkit_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, allow_undefined_stereo=False)`

Create a Molecule from a QCArchive entry based on the cmiles information.

If we also have a client instance/address we can go and attach the starting geometry.

#### Parameters

**qca\_record** [dict,] A QCArchive dict with json encoding or record instance

**client** [optional, default=None,] A qcportal.FractalClient instance so we can pull the initial molecule geometry.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecule** [openforcefield.topology.Molecule] An openforcefield molecule instance.

#### Raises

**AttributeError** [if the record dict can not be made from a record instance.] if a client is passed, because the client could not retrieve the initial molecule.

**KeyError** [if the dict does not contain the canonical\_isomeric\_explicit\_hydrogen\_mapped\_smiles.]

**InvalidConformerError** [silent error, if the conformer could not be attached.]

**static** `from_rdkit(*args, **kwargs)`

Create a Molecule from an RDKit molecule.

Requires the RDKit to be installed.

#### Parameters

**rdmol** [rdkit.RDMol] An RDKit molecule

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecule** [openforcefield.Molecule] An openforcefield molecule

## Examples

Create a molecule from an RDKit molecule

```
>>> from rdkit import Chem
>>> from openforcefield.tests.utils import get_data_file_path
>>> rdmol = Chem.MolFromMolFile(get_data_file_path('systems/monomers/ethanol.sdf'))
>>> molecule = Molecule.from_rdkit(rdmol)
```

```
static from_smiles(smiles, hydrogens_are_explicit=False, toolkit_registry=ToolkitRegistry
                    containing The RDKit, AmberTools, Built-in Toolkit, al-
                    low_undefined_stereo=False)
```

Construct a Molecule from a SMILES representation

### Parameters

**smiles** [str] The SMILES representation of the molecule.

**hydrogens\_are\_explicit** [bool, default = False] If False, the cheminformatics toolkit will perform hydrogen addition

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

**allow\_undefined\_stereo** [bool, default=False] Whether to accept SMILES with undefined stereochemistry. If False, an exception will be raised if a SMILES with undefined stereochemistry is passed into this function.

### Returns

**molecule** [openforcefield.topology.Molecule]

## Examples

```
>>> molecule = Molecule.from_smiles('Cc1ccccc1')
```

**classmethod from\_toml(serialized)**

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

### Parameters

**serialized** [str] A TOML serialized representation of the object

### Returns

**instance** [cls] An instantiated object

**static from\_topology(topology)**

Return a Molecule representation of an openforcefield Topology containing a single Molecule object.

### Parameters

**topology** [openforcefield.topology.Topology] The [Topology](#) object containing a single [Molecule](#) object. Note that OpenMM and MDTraj Topology objects are not supported.

**Returns**

**molecule** [openforcefield.topology.Molecule] The Molecule object in the topology

**Raises**

**ValueError** If the topology does not contain exactly one molecule.

**Examples**

Create a molecule from a Topology object that contains exactly one molecule

```
>>> molecule = Molecule.from_topology(topology)
```

**classmethod from\_xml(serialized)**

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_yaml(serialized)**

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**generate\_conformers(toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit, n\_conformers=10, rms\_cutoff=None, clear\_existing=True)**

Generate conformers for this molecule using an underlying toolkit. If `n_conformers=0`, no toolkit wrapper will be called. If `n_conformers=0` and `clear_existing=True`, `molecule.conformers` will be set to `None`.

**Parameters**

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES-to-molecule conversion

**n\_conformers** [int, default=1] The maximum number of conformers to produce

**rms\_cutoff** [simtk.Quantity-wrapped float, in units of distance, optional, default=None] The minimum RMS value at which two conformers are considered redundant and one is deleted. Precise implementation of this cutoff may be toolkit-dependent. If `None`, the cutoff is set to be the default value for each ToolkitWrapper (generally 1 Angstrom).

**clear\_existing** [bool, default=True] Whether to overwrite existing conformers for the molecule

**Raises**

**InvalidToolkitRegistryError** If an invalid object is passed as the toolkit\_registry parameter

### Examples

```
>>> molecule = Molecule.from_smiles('CCCCC')
>>> molecule.generate_conformers()
```

#### **generate\_unique\_atom\_names()**

Generate unique atom names using element name and number of times that element has occurred e.g. 'C1', 'H1', 'O1', 'C2', ...

#### **get\_bond\_between(*i*, *j*)**

Returns the bond between two atoms

##### **Parameters**

**i, j** [int or Atom] Atoms or atom indices to check

##### **Returns**

**bond** [Bond] The bond between i and j.

#### **property has\_unique\_atom\_names**

True if the molecule has unique atom names, False otherwise.

#### **property hill\_formula**

Get the Hill formula of the molecule

#### **property improvers**

Iterate over all proper torsions in the molecule

#### **is\_isomorphic\_with(*other*, *\*\*kwargs*)**

Check if the molecule is isomorphic with the other molecule which can be an openforcefield.topology.Molecule, or TopologyMolecule or nx.Graph(). Full matching is done using the options described below.

**Warning:** This API is experimental and subject to change.

##### **Parameters**

**other:** openforcefield.topology.Molecule or TopologyMolecule or nx.Graph()

**return\_atom\_map:** bool, default=False, optional will return an optional dict containing the atomic mapping.

**aromatic\_matching:** bool, default=True, optional

compare the aromatic attributes of bonds and atoms.

**formal\_charge\_matching:** bool, default=True, optional

compare the formal charges attributes of the atoms.

**bond\_order\_matching:** bool, default=True, optional

compare the bond order on attributes of the bonds.

**atom\_stereochemistry\_matching** [bool, default=True, optional] If False, atoms' stereochemistry is ignored for the purpose of determining equality.

**bond\_stereochemistry\_matching** [bool, default=True, optional] If False, bonds' stereochemistry is ignored for the purpose of determining equality.

**strip\_pyrimidal\_n\_atom\_stereo**: bool, default=True, optional If True, any stereochemistry defined around pyrimidal nitrogen stereocenters will be disregarded in the isomorphism check.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for removing stereochemistry from pyrimidal nitrogens.

#### Returns

**isomorphic** [bool]

#### property n\_angles

int: number of angles in the Molecule.

#### property n\_atoms

The number of Atom objects.

#### property n\_bonds

The number of Bond objects.

#### property n\_conformers

Returns the number of conformers for this molecule.

#### property n\_impropers

int: number of improper torsions in the Molecule.

#### property n\_particles

The number of Particle objects, which corresponds to how many positions must be used.

#### property n\_propers

int: number of proper torsions in the Molecule.

#### property n\_rings

Return the number of rings found in the Molecule

Requires the RDKit to be installed.

---

**Note:** For systems containing some special cases of connected rings, this function may not be well-behaved and may report a different number rings than expected. Some problematic cases include networks of many (5+) rings or bicyclic moieties (i.e. norbornane).

---

#### property n\_virtual\_particles

The number of VirtualParticle objects.

#### property n\_virtual\_sites

The number of VirtualSite objects.

#### property name

The name (or title) of the molecule

#### property partial\_charges

Returns the partial charges (if present) on the molecule.

#### Returns

**partial\_charges** [a simtk.unit.Quantity - wrapped numpy array [1 x n\_atoms] or None] The partial charges on this Molecule's atoms. Returns None if no charges have been specified.

**property particles**

Iterate over all Particle objects.

**property propers**

Iterate over all proper torsions in the molecule

**property properties**

The properties dictionary of the molecule

**remap(mapping\_dict, current\_to\_new=True)**

Remap all of the indexes in the molecule to match the given mapping dict

**Warning:** This API is experimental and subject to change.

**Parameters**

**mapping\_dict** [dict,] A dictionary of the mapping between in the indexes, this should start from 0.

**current\_to\_new** [bool, default=True] The dict is {current\_index: new\_index} if True else {new\_index: current\_index}

**Returns**

**new\_molecule** [openforcefield.topology.molecule.Molecule] An openforcefield.Molecule instance with all attributes transferred, in the PDB order.

**property rings**

Return the number of rings in this molecule.

Requires the RDKit to be installed.

---

**Note:** For systems containing some special cases of connected rings, this function may not be well-behaved and may report a different number rings than expected. Some problematic cases include networks of many (5+) rings or bicyclic moieties (i.e. norbornane).

---

**strip\_atom\_stereochemistry(smarts, toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit)**

Delete stereochemistry information for certain atoms, if it is present. This method can be used to “normalize” molecules imported from different cheminformatics toolkits, which differ in which atom centers are considered stereogenic.

**Parameters**

**smarts: str or ChemicalEnvironment** Tagged SMARTS with a single atom with index 1. Any matches for this atom will have any assigned stereochemistry information removed.

**toolkit\_registry** [a ToolkitRegistry or ToolkitWrapper object, optional, default=GLOBAL\_TOOLKIT\_REGISTRY] ToolkitRegistry or ToolkitWrapper to use for I/O operations

**to\_bson()**

Return a BSON serialized representation.



Specification: <http://bsonspec.org/>

#### Returns

**serialized** [bytes] A BSON serialized representation of the object

#### **to\_dict()**

Return a dictionary representation of the molecule.

#### Returns

**molecule\_dict** [OrderedDict] A dictionary representation of the molecule.

#### **to\_file**(*file\_path*, *file\_format*, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Write the current molecule to a file or file-like object

#### Parameters

**file\_path** [str or file-like object] A file-like object or the path to the file to be written.

**file\_format** [str] Format specifier, one of ['MOL2', 'MOL2H', 'SDF', 'PDB', 'SMI', 'CAN', 'TDT'] Note that not all toolkits support all formats

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper,]

**optional, default=GLOBAL\_TOOLKIT\_REGISTRY** ToolkitRegistry or ToolkitWrapper to use for file writing. If a Toolkit is passed, only the highest-precedence toolkit is used

#### Raises

**ValueError** If the requested *file\_format* is not supported by one of the installed cheminformatics toolkits

### Examples

```
>>> molecule = Molecule.from_iupac('imatinib')
>>> molecule.to_file('imatinib.mol2', file_format='mol2')
>>> molecule.to_file('imatinib.sdf', file_format='sdf')
>>> molecule.to_file('imatinib.pdb', file_format='pdb')
```

#### **static to\_hill\_formula**(*molecule*)

Generate the Hill formula from either a FrozenMolecule, TopologyMolecule or nx.Graph() of the molecule

#### Parameters

**molecule** [FrozenMolecule, TopologyMolecule or nx.Graph()]

#### Returns

**formula** [the Hill formula of the molecule]

#### Raises

**NotImplementedError** [if the molecule is not of one of the specified types.]

#### **to\_inchi**(*fixed\_hydrogens*=False, *toolkit\_registry*=*ToolkitRegistry* containing *The RDKit, AmberTools, Built-in Toolkit*)

Create an InChI string for the molecule using the requested toolkit backend. InChI is a standardised representation that does not capture tautomers unless specified using the fixed hydrogen layer.

For information on InChi see here <https://iupac.org/who-we-are/divisions/division-details/inchi/>

#### Parameters

**fixed\_hydrogens:** **bool**, **default=False** If a fixed hydrogen layer should be added to the InChI, if *True* this will produce a non standard specific InChI string of the molecule.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for molecule-to-InChI conversion

#### Returns

**inchi:** **str** The InChI string of the molecule.

#### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the toolkit\_registry parameter

**to\_inchikey**(*fixed\_hydrogens=False*, *toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)

Create an InChIKey for the molecule using the requested toolkit backend. InChIKey is a standardised representation that does not capture tautomers unless specified using the fixed hydrogen layer.

For information on InChi see here <https://iupac.org/who-we-are/divisions/division-details/inchi/>

#### Parameters

**fixed\_hydrogens:** **bool**, **default=False** If a fixed hydrogen layer should be added to the InChI, if *True* this will produce a non standard specific InChI string of the molecule.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for molecule-to-InChIKey conversion

#### Returns

**inchi\_key:** **str** The InChIKey representation of the molecule.

#### Raises

**InvalidToolkitRegistryError** If an invalid object is passed as the toolkit\_registry parameter

**to\_iupac**(*toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)  
Generate IUPAC name from Molecule

#### Returns

**iupac\_name** [str] IUPAC name of the molecule

---

**Note:** This method requires the OpenEye toolkit to be installed. ..

---

## Examples

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
>>> iupac_name = molecule.to_iupac()
```

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

### Parameters

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

### Returns

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

### Returns

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_networkx()**

Generate a NetworkX undirected graph from the Molecule.

Nodes are Atoms labeled with particle indices and atomic elements (via the `element` node attribute). Edges denote chemical bonds between Atoms. Virtual sites are not included, since they lack a concept of chemical connectivity.

### Returns

**graph** [networkx.Graph] The resulting graph, with nodes (atoms) labeled with atom indices, elements, stereochemistry and aromaticity flags and bonds with two atom indices, bond order, stereochemistry, and aromaticity flags

## Examples

Retrieve the bond graph for imatinib (OpenEye toolkit required)

```
>>> molecule = Molecule.from_iupac('imatinib')
>>> nxgraph = molecule.to_networkx()
```

**to\_openeye(aromaticity\_model='OEArModel\_MDL')**

Create an OpenEye molecule

Requires the OpenEye toolkit to be installed.

### Parameters

**aromaticity\_model** [str, optional, default=DEFAULT\_AROMATICITY\_MODEL] The aromaticity model to use

### Returns

**oemol** [openeye.oechem.OEMol] An OpenEye molecule

### Examples

Create an OpenEye molecule from a Molecule

```
>>> molecule = Molecule.from_smiles('CC')
>>> oemol = molecule.to_openeye()
```

### to\_pickle()

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

### Returns

**serialized** [str] A pickled representation of the object

### to\_qcschema(*multiplicity=1, conformer=0, extras=None*)

Generate the qcschema input format used to submit jobs to archive or run qcengine calculations locally, spec can be found here <<https://molssi-qc-schema.readthedocs.io/en/latest/index.html>>

**Warning:** This API is experimental and subject to change.

### Parameters

**multiplicity** [int, default=1,] The multiplicity of the molecule required for qcschema

**conformer** [int, default=0,] The index of the conformer that should be used for qcschema

**extras** [dict, default=None] The extras dictionary that should be included into the qcelestial.models.Molecule. This can be used to include extra information such as the smiles representation.

### Returns

**qcelestial.models.Molecule** : A validated qcschema

### Raises

**ImportError** [if qcelestial is not installed; the qcschema can not be validated.]

**InvalidConformerError** [if there is no conformer found at the given index.]

### to\_rdkit(*aromaticity\_model='OEAroModel\_MDL'*)

Create an RDKit molecule

Requires the RDKit to be installed.

### Parameters

**aromaticity\_model** [str, optional, default=DEFAULT\_AROMATICITY\_MODEL] The aromaticity model to use

### Returns

**rdmol** [rkit.RDMol] An RDKit molecule

## Examples

Convert a molecule to RDKit

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
>>> rdmol = molecule.to_rdkit()
```

**to\_smiles**(*isomeric=True*, *explicit\_hydrogens=True*, *mapped=False*, *toolkit\_registry=ToolkitRegistry containing The RDKit, AmberTools, Built-in Toolkit*)  
Return a canonical isomeric SMILES representation of the current molecule. A partially mapped smiles can also be generated for atoms of interest by supplying an *atom\_map* to the properties dictionary.

---

**Note:** RDKit and OpenEye versions will not necessarily return the same representation.

---

## Parameters

**isomeric:** bool optional, default= True return an isomeric smiles

**explicit\_hydrogens:** bool optional, default=True return a smiles string containing all hydrogens explicitly

**mapped:** bool optional, default=False return a explicit hydrogen mapped smiles, the atoms to be mapped can be controlled by supplying an atom map into the properties dictionary. If no mapping is passed all atoms will be mapped in order, else an atom map dictionary from the current atom index to the map id should be supplied with no duplicates. The map ids (values) should start from 0 or 1.

**toolkit\_registry** [openforcefield.utils.toolkits.ToolkitRegistry or openforcefield.utils.toolkits.ToolkitWrapper, optional, default=None] ToolkitRegistry or ToolkitWrapper to use for SMILES conversion

## Returns

**smiles** [str] Canonical isomeric explicit-hydrogen SMILES

## Examples

```
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
>>> smiles = molecule.to_smiles()
```

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

## Returns

**serialized** [str] A TOML serialized representation of the object

**to\_topology()**

Return an openforcefield Topology representation containing one copy of this molecule

**Returns**

**topology** [openforcefield.topology.Topology] A Topology representation of this molecule

**Examples**

```
>>> molecule = Molecule.from_iupac('imatinib')
>>> topology = molecule.to_topology()
```

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**property torsions**

Get an iterator over all i-j-k-l torsions. Note that i-j-k-i torsions (cycles) are excluded.

**Returns**

**torsions** [iterable of 4-Atom tuples]

**property total\_charge**

Return the total charge on the molecule

**property virtual\_sites**

Iterate over all VirtualSite objects.

**visualize(backend='rdkit', width=500, height=300)**

Render a visualization of the molecule in Jupyter

**Parameters**

**backend** [str, optional, default='rdkit'] Which visualization engine to use. Choose from: - rdkit - openeye - ngview (conformers needed)

**width** [int, optional, default=500] Width of the generated representation (only applicable to backend=openeye)

**height** [int, optional, default=300] Width of the generated representation (only applicable to backend=openeye)

**Returns**

**object** Depending on the backend chosen: - rdkit, openeye -> IPython.display.Image  
 - ngview -> ngview.NGLWidget

## openforcefield.topology.Topology

**class** openforcefield.topology.Topology(*other=None*)

A Topology is a chemical representation of a system containing one or more molecules appearing in a specified order.

As of the 0.7.0 release, the Topology particle indexing system puts all atoms before all virtualsites. This ensures that atoms keep the same Topology particle index value, even if the Topology is modified during system creation by the addition of virtual sites.

**Warning:** This API is experimental and subject to change.

## Examples

Import some utilities

```
>>> from simtk.openmm import app
>>> from openforcefield.tests.utils import get_data_file_path, get_packmol_pdb_file_path
>>> pdb_filepath = get_packmol_pdb_file_path('cyclohexane_ethanol_0.4_0.6')
>>> monomer_names = ('cyclohexane', 'ethanol')
```

Create a Topology object from a PDB file and sdf files defining the molecular contents

```
>>> from openforcefield.topology import Molecule, Topology
>>> pdbfile = app.PDBFile(pdb_filepath)
>>> sdf_filepaths = [get_data_file_path(f'systems/monomers/{name}.sdf') for name in monomer_names]
>>> unique_molecules = [Molecule.from_file(sdf_filepath) for sdf_filepath in sdf_filepaths]
>>> topology = Topology.from_openmm(pdbfile.topology, unique_molecules=unique_molecules)
```

Create a Topology object from a PDB file and IUPAC names of the molecular contents

```
>>> pdbfile = app.PDBFile(pdb_filepath)
>>> unique_molecules = [Molecule.from_iupac(name) for name in monomer_names]
>>> topology = Topology.from_openmm(pdbfile.topology, unique_molecules=unique_molecules)
```

Create an empty Topology object and add a few copies of a single benzene molecule

```
>>> topology = Topology()
>>> molecule = Molecule.from_iupac('benzene')
>>> molecule_topology_indices = [topology.add_molecule(molecule) for index in range(10)]
```

## Attributes

- angles** Iterable of Tuple[TopologyAtom]: iterator over the angles in this Topology.
- aromaticity\_model** Get the aromaticity model applied to all molecules in the topology.
- box\_vectors** Return the box vectors of the topology, if specified
- charge\_model** Get the partial charge model applied to all molecules in the topology.
- constrained\_atom\_pairs** Returns the constrained atom pairs of the Topology

**`fractional_bond_order_model`** Get the fractional bond order model for the Topology.

**`impropers`** Iterable of `Tuple[TopologyAtom]`: iterator over the improper torsions in this Topology.

**`n_angles`** int: number of angles in this Topology.

**`n_impropers`** int: number of improper torsions in this Topology.

**`n_propers`** int: number of proper torsions in this Topology.

**`n_reference_molecules`** Returns the number of reference (unique) molecules in in this Topology.

**`n_topology_atoms`** Returns the number of topology atoms in in this Topology.

**`n_topology_bonds`** Returns the number of TopologyBonds in in this Topology.

**`n_topology_molecules`** Returns the number of topology molecules in in this Topology.

**`n_topology_particles`** Returns the number of topology particles (TopologyAtoms and TopologyVirtualSites) in in this Topology.

**`n_topology_virtual_sites`** Returns the number of TopologyVirtualSites in in this Topology.

**`propers`** Iterable of `Tuple[TopologyAtom]`: iterator over the proper torsions in this Topology.

**`reference_molecules`** Get an iterator of reference molecules in this Topology.

**`topology_atoms`** Returns an iterator over the atoms in this Topology.

**`topology_bonds`** Returns an iterator over the bonds in this Topology

**`topology_molecules`** Returns an iterator over all the TopologyMolecules in this Topology

**`topology_particles`** Returns an iterator over the particles (TopologyAtoms and TopologyVirtualSites) in this Topology.

**`topology_virtual_sites`** Get an iterator over the virtual sites in this Topology

## Methods

<code>add_constraint(iatom, jatom[, distance])</code>	Mark a pair of atoms as constrained.
<code>add_molecule(molecule[, ...])</code>	Add a Molecule to the Topology.
<code>add_particle(particle)</code>	Add a Particle to the Topology.
<code>assert_bonded(atom1, atom2)</code>	Raise an exception if the specified atoms are not bonded in the topology.
<code>atom(atom_topology_index)</code>	Get the TopologyAtom at a given Topology atom index.
<code>bond(bond_topology_index)</code>	Get the TopologyBond at a given Topology bond index.
<code>chemical_environment_matches(query[, ...])</code>	Retrieve all matches for a given chemical environment query.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.

continues on next page



Table 8 – continued from previous page

<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_mdtraj(mdtraj_topology[, unique_molecules])</code>	Construct an openforcefield Topology object from an MDTraj Topology object.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_molecules(molecules)</code>	Create a new Topology object containing one copy of each of the specified molecule(s).
<code>from_openmm(openmm_topology[, unique_molecules])</code>	Construct an openforcefield Topology object from an OpenMM Topology object.
<code>from_parmed(parmed_structure[, unique_molecules])</code>	

**Warning:**

This  
func-  
tion-  
al-  
ity  
will  
be  
im-  
ple-  
mented  
in  
a  
fu-  
ture  
toolkit  
re-  
lease.

<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_bond_between(i, j)</code>	Returns the bond between two atoms
<code>is_bonded(i, j)</code>	Returns True if the two atoms are bonded
<code>is_constrained(iatom, jatom)</code>	Check if a pair of atoms are marked as constrained.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.

continues on next page

Table 8 – continued from previous page

<code>to_file(filename, positions[, file_format, ...])</code>	To save a PDB file with coordinates as well as topology from openforcefield topology object Reference: <a href="https://github.com/openforcefield/openforcefield/issues/502">https://github.com/openforcefield/openforcefield/issues/502</a> Note: 1. This doesn't handle virtual sites (they're ignored) 2. Atom numbering may not remain same, for example if the atoms in water are numbered as 1001, 1002, 1003, they would change to 1, 2, 3. This doesn't affect the topology or coordinates or atom-ordering in anyway 3. Same issue with the amino acid names in the pdb file, they are not returned.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_openmm([ensure_unique_atom_names])</code>	Create an OpenMM Topology object.
<code>to_parmed()</code>	

**Warning:**

This  
func-  
tion-  
al-  
ity  
will  
be  
im-  
ple-  
mented  
in  
a  
fu-  
ture  
toolkit  
re-  
lease.

<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.
<code>virtual_site(vsite_topology_index)</code>	Get the TopologyAtom at a given Topology atom index.

`__init__(other=None)`

Create a new Topology.

**Parameters**

**other** [optional, default=None] If specified, attempt to construct a copy of the Topology from the specified object. This might be a Topology object, or a file that can be used to construct a Topology object or serialized Topology object.

## Methods

<code>__init__([other])</code>	Create a new Topology.
<code>add_constraint(iatom, jatom[, distance])</code>	Mark a pair of atoms as constrained.
<code>add_molecule(molecule[, ...])</code>	Add a Molecule to the Topology.
<code>add_particle(particle)</code>	Add a Particle to the Topology.
<code>assert_bonded(atom1, atom2)</code>	Raise an exception if the specified atoms are not bonded in the topology.
<code>atom(atom_topology_index)</code>	Get the TopologyAtom at a given Topology atom index.
<code>bond(bond_topology_index)</code>	Get the TopologyBond at a given Topology bond index.
<code>chemical_environment_matches(query[, ...])</code>	Retrieve all matches for a given chemical environment query.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_mdtraj(mdtraj_topology[, unique_molecules])</code>	Construct an openforcefield Topology object from an MDTraj Topology object.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_molecules(molecules)</code>	Create a new Topology object containing one copy of each of the specified molecule(s).
<code>from_openmm(openmm_topology[, unique_molecules])</code>	Construct an openforcefield Topology object from an OpenMM Topology object.
<code>from_parmed(parmed_structure[, unique_molecules])</code>	

**Warning:**

This functionality will be implemented in a future toolkit release.

<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
--------------------------------------	--

continues on next page

Table 9 – continued from previous page

<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_bond_between(i, j)</code>	Returns the bond between two atoms
<code>is_bonded(i, j)</code>	Returns True if the two atoms are bonded
<code>is_constrained(iatom, jatom)</code>	Check if a pair of atoms are marked as constrained.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_file(filename, positions[, file_format, ...])</code>	To save a PDB file with coordinates as well as topology from openforcefield topology object Reference: <a href="https://github.com/openforcefield/openforcefield/issues/502">https://github.com/openforcefield/openforcefield/issues/502</a> Note: 1. This doesn't handle virtual sites (they're ignored) 2. Atom numbering may not remain same, for example if the atoms in water are numbered as 1001, 1002, 1003, they would change to 1, 2, 3. This doesn't affect the topology or coordinates or atom-ordering in anyway 3. Same issue with the amino acid names in the pdb file, they are not returned.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_openmm([ensure_unique_atom_names])</code>	Create an OpenMM Topology object.
<code>to_parmed()</code>	

**Warning:**

This functionality will be implemented in a future toolkit release.

<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.

continues on next page

Table 9 – continued from previous page

<code>to_yaml()</code>	Return a YAML serialized representation.
<code>virtual_site(vsite_topology_index)</code>	Get the TopologyAtom at a given Topology atom index.

**Attributes**

<code>angles</code>	Iterable of Tuple[TopologyAtom]: iterator over the angles in this Topology.
<code>aromaticity_model</code>	Get the aromaticity model applied to all molecules in the topology.
<code>box_vectors</code>	Return the box vectors of the topology, if specified Returns <code>box_vectors</code> : simtk.unit.Quantity wrapped numpy array of shape (3, 3) The unit-wrapped box vectors of this topology
<code>charge_model</code>	Get the partial charge model applied to all molecules in the topology.
<code>constrained_atom_pairs</code>	Returns the constrained atom pairs of the Topology
<code>fractional_bond_order_model</code>	Get the fractional bond order model for the Topology.
<code>impropers</code>	Iterable of Tuple[TopologyAtom]: iterator over the improper torsions in this Topology.
<code>n_angles</code>	int: number of angles in this Topology.
<code>n_impropers</code>	int: number of improper torsions in this Topology.
<code>n_propers</code>	int: number of proper torsions in this Topology.
<code>n_reference_molecules</code>	Returns the number of reference (unique) molecules in in this Topology.
<code>n_topology_atoms</code>	Returns the number of topology atoms in in this Topology.
<code>n_topology_bonds</code>	Returns the number of TopologyBonds in in this Topology.
<code>n_topology_molecules</code>	Returns the number of topology molecules in in this Topology.
<code>n_topology_particles</code>	Returns the number of topology particles (TopologyAtoms and TopologyVirtualSites) in in this Topology.
<code>n_topology_virtual_sites</code>	Returns the number of TopologyVirtualSites in in this Topology.
<code>propers</code>	Iterable of Tuple[TopologyAtom]: iterator over the proper torsions in this Topology.
<code>reference_molecules</code>	Get an iterator of reference molecules in this Topology.
<code>topology_atoms</code>	Returns an iterator over the atoms in this Topology.
<code>topology_bonds</code>	Returns an iterator over the bonds in this Topology
<code>topology_molecules</code>	Returns an iterator over all the Topology-Molecules in this Topology

continues on next page

Table 10 – continued from previous page

<code>topology_particles</code>	Returns an iterator over the particles (Topology-Atoms and TopologyVirtualSites) in this Topology.
<code>topology_virtual_sites</code>	Get an iterator over the virtual sites in this Topology.

**property reference\_molecules**

Get an iterator of reference molecules in this Topology.

**Returns**

iterable of `openforcefield.topology.Molecule`

**classmethod from\_molecules(*molecules*)**

Create a new Topology object containing one copy of each of the specified molecule(s).

**Parameters**

**molecules** [Molecule or iterable of Molecules] One or more molecules to be added to the Topology

**Returns**

**topology** [Topology] The Topology created from the specified molecule(s)

**assert\_bonded(*atom1*, *atom2*)**

Raise an exception if the specified atoms are not bonded in the topology.

**Parameters**

**atom1, atom2** [openforcefield.topology.Atom or int] The atoms or atom topology indices to check to ensure they are bonded

**property aromaticity\_model**

Get the aromaticity model applied to all molecules in the topology.

**Returns**

**aromaticity\_model** [str] Aromaticity model in use.

**property box\_vectors**

Return the box vectors of the topology, if specified Returns — box\_vectors : simtk.unit.Quantity wrapped numpy array of shape (3, 3)

The unit-wrapped box vectors of this topology

**property charge\_model**

Get the partial charge model applied to all molecules in the topology.

**Returns**

**charge\_model** [str] Charge model used for all molecules in the Topology.

**property constrained\_atom\_pairs**

Returns the constrained atom pairs of the Topology

**Returns**

**constrained\_atom\_pairs** [dict] dictionary of the form `d[(atom1_topology_index, atom2_topology_index)] = distance (float)`

**property fractional\_bond\_order\_model**

Get the fractional bond order model for the Topology.

**Returns**

**fractional\_bond\_order\_model** [str] Fractional bond order model in use.

**property n\_reference\_molecules**

Returns the number of reference (unique) molecules in in this Topology.

**Returns**

**n\_reference\_molecules** [int]

**property n\_topology\_molecules**

Returns the number of topology molecules in in this Topology.

**Returns**

**n\_topology\_molecules** [int]

**property topology\_molecules**

Returns an iterator over all the TopologyMolecules in this Topology

**Returns**

**topology\_molecules** [Iterable of TopologyMolecule]

**property n\_topology\_atoms**

Returns the number of topology atoms in in this Topology.

**Returns**

**n\_topology\_atoms** [int]

**property topology\_atoms**

Returns an iterator over the atoms in this Topology. These will be in ascending order of topology index (Note that this is not necessarily the same as the reference molecule index)

**Returns**

**topology\_atoms** [Iterable of TopologyAtom]

**property n\_topology\_bonds**

Returns the number of TopologyBonds in in this Topology.

**Returns**

**n\_bonds** [int]

**property topology\_bonds**

Returns an iterator over the bonds in this Topology

**Returns**

**topology\_bonds** [Iterable of TopologyBond]

**property n\_topology\_particles**

Returns the number of topology particles (TopologyAtoms and TopologyVirtualSites) in in this Topology.

**Returns**

**n\_topology\_particles** [int]

**property topology\_particles**

Returns an iterator over the particles (TopologyAtoms and TopologyVirtualSites) in this Topology. The TopologyAtoms will be in order of ascending Topology index (Note that this may differ from the order of atoms in the reference molecule index).

**Returns**

**topology\_particles** [Iterable of TopologyAtom and TopologyVirtualSite]

**property n\_topology\_virtual\_sites**

Returns the number of TopologyVirtualSites in in this Topology.

**Returns**

**n\_virtual\_sites** [iterable of TopologyVirtualSites]

**property topology\_virtual\_sites**

Get an iterator over the virtual sites in this Topology

**Returns**

**topology\_virtual\_sites** [Iterable of TopologyVirtualSite]

**property n\_angles**

int: number of angles in this Topology.

**property angles**

Iterable of Tuple[TopologyAtom]: iterator over the angles in this Topology.

**property n\_propers**

int: number of proper torsions in this Topology.

**property propers**

Iterable of Tuple[TopologyAtom]: iterator over the proper torsions in this Topology.

**property n\_impropers**

int: number of improper torsions in this Topology.

**property impropers**

Iterable of Tuple[TopologyAtom]: iterator over the improper torsions in this Topology.

**chemical\_environment\_matches**(*query*, *aromaticity\_model*='MDL',  
*toolkit\_registry*=*ToolkitRegistry* containing *The RDKit*, *AmberTools*, *Built-in Toolkit*)

Retrieve all matches for a given chemical environment query.

TODO: \* Do we want to generalize this to other kinds of queries too, like mdtraj DSL, pymol selections, atom index slices, etc?

We could just call it `topology.matches(query)`

**Parameters**

**query** [str or ChemicalEnvironment] SMARTS string (with one or more tagged atoms) or ChemicalEnvironment query Query will internally be resolved to SMARTS using `query.as_smarts()` if it has an `.as_smarts` method.

**aromaticity\_model** [str] Override the default aromaticity model for this topology and use the specified aromaticity model instead. Allowed values: ['MDL']

**Returns**

**matches** [list of Topology\_ChemicalEnvironmentMatch] A list of tuples, containing the topology indices of the matching atoms.

**to\_dict()**

Convert to dictionary representation.

**classmethod from\_dict(d)**

Static constructor from dictionary representation.



**classmethod** `from_openmm(openmm_topology, unique_molecules=None)`

Construct an openforcefield Topology object from an OpenMM Topology object.

#### Parameters

**openmm\_topology** [simtk.openmm.app.Topology] An OpenMM Topology object

**unique\_molecules** [iterable of objects that can be used to construct unique Molecule objects] All unique molecules must be provided, in any order, though multiple copies of each molecule are allowed. The atomic elements and bond connectivity will be used to match the reference molecules to molecule graphs appearing in the OpenMM Topology. If bond orders are present in the OpenMM Topology, these will be used in matching as well. If all bonds have bond orders assigned in `mdtraj_topology`, these bond orders will be used to attempt to construct the list of unique Molecules if the `unique_molecules` argument is omitted.

#### Returns

**topology** [openforcefield.topology.Topology] An openforcefield Topology object

**to\_openmm(ensure\_unique\_atom\_names=True)**

Create an OpenMM Topology object.

The OpenMM Topology object will have one residue per topology molecule. Currently, the number of chains depends on how many copies of the same molecule are in the Topology. Molecules with more than 5 copies are all assigned to a single chain, otherwise one chain is created for each molecule. This behavior may change in the future.

#### Parameters

**ensure\_unique\_atom\_names** [bool, optional. Default=True] Whether to check that the molecules in each molecule have unique atom names, and regenerate them if not. Note that this looks only at molecules, and does not guarantee uniqueness in the entire Topology.

#### Returns

**openmm\_topology** [simtk.openmm.app.Topology] An OpenMM Topology object

**to\_file(filename, positions, file\_format='PDB', keepIds=False)**

To save a PDB file with coordinates as well as topology from openforcefield topology object Reference: <https://github.com/openforcefield/openforcefield/issues/502> Note: 1. This doesn't handle virtual sites (they're ignored)

2. Atom numbering may not remain same, for example if the atoms in water are numbered as 1001, 1002, 1003, they would change to 1, 2, 3. This doesn't affect the topology or coordinates or atom-ordering in anyway
3. Same issue with the amino acid names in the pdb file, they are not returned

#### Parameters

**filename** [str] name of the pdb file to write to

**positions** [n\_atoms x 3 numpy array or simtk.unit.Quantity-wrapped n\_atoms x 3 iterable] Can be an openmm 'quantity' object which has atomic positions as a list of Vec3s along with associated units, otherwise a 3D array of UNITLESS numbers are considered as "Angstroms" by default

**file\_format** [str] Output file format. Case insensitive. Currently only supported value is "pdb".

**static** `from_mdtraj(mdtraj_topology, unique_molecules=None)`

Construct an openforcefield Topology object from an MDTraj Topology object.

#### Parameters

**mdtraj\_topology** [mdtraj.Topology] An MDTraj Topology object

**unique\_molecules** [iterable of objects that can be used to construct unique Molecule objects] All unique molecules must be provided, in any order, though multiple copies of each molecule are allowed. The atomic elements and bond connectivity will be used to match the reference molecules to molecule graphs appearing in the MDTraj Topology. If bond orders are present in the MDTraj Topology, these will be used in matching as well. If all bonds have bond orders assigned in `mdtraj_topology`, these bond orders will be used to attempt to construct the list of unique Molecules if the `unique_molecules` argument is omitted.

#### Returns

**topology** [openforcefield.Topology] An openforcefield Topology object

**static** `from_parmed(parmed_structure, unique_molecules=None)`

**Warning:** This functionality will be implemented in a future toolkit release.

Construct an openforcefield Topology object from a ParmEd Structure object.

#### Parameters

**parmed\_structure** [parmed.Structure] A ParmEd structure object

**unique\_molecules** [iterable of objects that can be used to construct unique Molecule objects] All unique molecules must be provided, in any order, though multiple copies of each molecule are allowed. The atomic elements and bond connectivity will be used to match the reference molecules to molecule graphs appearing in the structure's topology object. If bond orders are present in the structure's topology object, these will be used in matching as well. If all bonds have bond orders assigned in the structure's topology object, these bond orders will be used to attempt to construct the list of unique Molecules if the `unique_molecules` argument is omitted.

#### Returns

**topology** [openforcefield.Topology] An openforcefield Topology object

`to_parmed()`

**Warning:** This functionality will be implemented in a future toolkit release.

Create a ParmEd Structure object.

#### Returns

**parmed\_structure** [parmed.Structure] A ParmEd Structure object

`get_bond_between(i, j)`

Returns the bond between two atoms

**Parameters**

**i, j** [int or TopologyAtom] Atoms or atom indices to check

**Returns**

**bond** [TopologyBond] The bond between i and j.

**is\_bonded**(*i, j*)

Returns True if the two atoms are bonded

**Parameters**

**i, j** [int or TopologyAtom] Atoms or atom indices to check

**Returns**

**is\_bonded** [bool] True if atoms are bonded, False otherwise.

**atom**(*atom\_topology\_index*)

Get the TopologyAtom at a given Topology atom index.

**Parameters**

**atom\_topology\_index** [int] The index of the TopologyAtom in this Topology

**Returns**

An `openforcefield.topology.TopologyAtom`

**virtual\_site**(*vsite\_topology\_index*)

Get the TopologyAtom at a given Topology atom index.

**Parameters**

**vsite\_topology\_index** [int] The index of the TopologyVirtualSite in this Topology

**Returns**

An `openforcefield.topology.TopologyVirtualSite`

**bond**(*bond\_topology\_index*)

Get the TopologyBond at a given Topology bond index.

**Parameters**

**bond\_topology\_index** [int] The index of the TopologyBond in this Topology

**Returns**

An `openforcefield.topology.TopologyBond`

**add\_particle**(*particle*)

Add a Particle to the Topology.

**Parameters**

**particle** [Particle] The Particle to be added. The Topology will take ownership of the Particle.

**classmethod from\_bson**(*serialized*)

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_json**(*serialized*)

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_messagepack**(*serialized*)

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_pickle**(*serialized*)

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_toml**(*serialized*)

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_xml**(*serialized*)

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml**(*indent=2*)

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml**()

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**add\_molecule**(*molecule, local\_topology\_to\_reference\_index=None*)

Add a Molecule to the Topology. You can optionally request that the atoms be added to the Topology in a different order than they appear in the Molecule.

**Parameters**

**molecule** [Molecule] The Molecule to be added.

**local\_topology\_to\_reference\_index**: dict, optional, default = None Dictionary of {TopologyMolecule\_atom\_index : Molecule\_atom\_index} for the Topology-Molecule that will be built. If None, this function will add the atoms to the Topology in the order that they appear in the reference molecule.

**Returns**

**index** [int] The index of this molecule in the topology

**add\_constraint**(*iatom, jatom, distance=True*)

Mark a pair of atoms as constrained.

Constraints between atoms that are not bonded (e.g., rigid waters) are permissible.

**Parameters**

**iatom, jatom** [Atom] Atoms to mark as constrained These atoms may be bonded or not in the Topology

**distance** [simtk.unit.Quantity, optional, default=True] Constraint distance True if distance has yet to be determined False if constraint is to be removed

**is\_constrained**(*iatom, jatom*)

Check if a pair of atoms are marked as constrained.

**Parameters**

**iatom, jatom** [int] Indices of atoms to mark as constrained.

**Returns**

**distance** [simtk.unit.Quantity or bool] True if constrained but constraints have not yet been applied Distance if constraint has already been added to System

## openforcefield.topology.TopologyMolecule

**class** openforcefield.topology.**TopologyMolecule**(*reference\_molecule*, *topology*, *local\_topology\_to\_reference\_index=None*)

TopologyMolecules are built to be an efficient way to store large numbers of copies of the same molecule for parameterization and system preparation.

**Warning:** This API is experimental and subject to change.

### Attributes

**angles** Iterable of Tuple[TopologyAtom]: iterator over the angles in this Topology.

**atom\_start\_topology\_index** Get the topology index of the first atom in this TopologyMolecule

**atoms** Return an iterator of all the TopologyAtoms in this TopologyMolecule

**bond\_start\_topology\_index** Get the topology index of the first bond in this TopologyMolecule

**bonds** Return an iterator of all the TopologyBonds in this TopologyMolecule

**impropers** Iterable of Tuple[TopologyAtom]: iterator over the improper torsions in this Topology.

**n\_angles** int: number of angles in this Topology.

**n\_atoms** The number of atoms in this topology.

**n\_bonds** Get the number of bonds in this TopologyMolecule

**n\_impropers** int: number of proper torsions in this Topology.

**n\_particles** Get the number of particles in this TopologyMolecule

**n\_propers** int: number of proper torsions in this Topology.

**n\_virtual\_sites** Get the number of virtual sites in this TopologyMolecule

**particles** Return an iterator of all the TopologyParticles in this TopologyMolecules

**propers** Iterable of Tuple[TopologyAtom]: iterator over the proper torsions in this Topology.

**reference\_molecule** Get the reference molecule for this TopologyMolecule

**topology** Get the topology that this TopologyMolecule belongs to

**virtual\_particle\_start\_topology\_index** Get the topology index of the first virtual particle in this TopologyMolecule

**virtual\_site\_start\_topology\_index** Get the topology index of the first virtual site in this TopologyMolecule

**virtual\_sites** Return an iterator of all the TopologyVirtualSites in this TopologyMolecules

## Methods

<code>atom(index)</code>	Get the TopologyAtom with a given topology atom index in this TopologyMolecule.
<code>bond(index)</code>	Get the TopologyBond with a given reference molecule index in this TopologyMolecule
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>particle(index)</code>	Get the TopologyParticle with a given reference molecule index in this TopologyMolecule
<code>to_dict()</code>	Convert to dictionary representation.
<code>virtual_site(index)</code>	Get the TopologyVirtualSite with a given reference molecule index in this TopologyMolecule

`__init__(reference_molecule, topology, local_topology_to_reference_index=None)`  
Create a new TopologyMolecule.

### Parameters

**reference\_molecule** [an openforcefield.topology.molecule.Molecule] The reference molecule, with details like formal charges, partial charges, bond orders, partial bond orders, and atomic symbols.

**topology** [an openforcefield.topology.Topology] The topology that this TopologyMolecule belongs to

**local\_topology\_to\_reference\_index** [dict, optional, default=None] Dictionary of {TopologyMolecule\_atom\_index : Molecule\_atom\_index} for the TopologyMolecule that will be built

## Methods

<code>__init__(reference_molecule, topology[, ...])</code>	Create a new TopologyMolecule.
<code>atom(index)</code>	Get the TopologyAtom with a given topology atom index in this TopologyMolecule.
<code>bond(index)</code>	Get the TopologyBond with a given reference molecule index in this TopologyMolecule
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>particle(index)</code>	Get the TopologyParticle with a given reference molecule index in this TopologyMolecule
<code>to_dict()</code>	Convert to dictionary representation.
<code>virtual_site(index)</code>	Get the TopologyVirtualSite with a given reference molecule index in this TopologyMolecule



**Attributes**

<code>angles</code>	Iterable of Tuple[TopologyAtom]: iterator over the angles in this Topology.
<code>atom_start_topology_index</code>	Get the topology index of the first atom in this TopologyMolecule
<code>atoms</code>	Return an iterator of all the TopologyAtoms in this TopologyMolecule
<code>bond_start_topology_index</code>	Get the topology index of the first bond in this TopologyMolecule
<code>bonds</code>	Return an iterator of all the TopologyBonds in this TopologyMolecule
<code>impropers</code>	Iterable of Tuple[TopologyAtom]: iterator over the improper torsions in this Topology.
<code>n_angles</code>	int: number of angles in this Topology.
<code>n_atoms</code>	The number of atoms in this topology.
<code>n_bonds</code>	Get the number of bonds in this Topology-Molecule
<code>n_impropers</code>	int: number of proper torsions in this Topology.
<code>n_particles</code>	Get the number of particles in this Topology-Molecule
<code>n_propers</code>	int: number of proper torsions in this Topology.
<code>n_virtual_sites</code>	Get the number of virtual sites in this Topology-Molecule
<code>particles</code>	Return an iterator of all the TopologyParticles in this TopologyMolecules
<code>propers</code>	Iterable of Tuple[TopologyAtom]: iterator over the proper torsions in this Topology.
<code>reference_molecule</code>	Get the reference molecule for this Topology-Molecule
<code>topology</code>	Get the topology that this TopologyMolecule belongs to
<code>virtual_particle_start_topology_index</code>	Get the topology index of the first virtual particle in this TopologyMolecule
<code>virtual_site_start_topology_index</code>	Get the topology index of the first virtual site in this TopologyMolecule
<code>virtual_sites</code>	Return an iterator of all the TopologyVirtualSites in this TopologyMolecules

**property topology**

Get the topology that this TopologyMolecule belongs to

**Returns**

an `openforcefield.topology.Topology`

**property reference\_molecule**

Get the reference molecule for this TopologyMolecule

**Returns**

an `openforcefield.topology.molecule.Molecule`

**property n\_atoms**

The number of atoms in this topology.

**Returns****int****atom(*index*)**

Get the TopologyAtom with a given topology atom index in this TopologyMolecule.

**Parameters****index** [int] Index of the TopologyAtom within this TopologyMolecule to retrieve**Returns****an openforcefield.topology.TopologyAtom****property atoms**

Return an iterator of all the TopologyAtoms in this TopologyMolecule

**Returns****an iterator of openforcefield.topology.TopologyAtoms****property atom\_start\_topology\_index**

Get the topology index of the first atom in this TopologyMolecule

**property virtual\_particle\_start\_topology\_index**

Get the topology index of the first virtual particle in this TopologyMolecule

**bond(*index*)**

Get the TopologyBond with a given reference molecule index in this TopologyMolecule

**Parameters****index** [int] Index of the TopologyBond within this TopologyMolecule to retrieve**Returns****an openforcefield.topology.TopologyBond****property bonds**

Return an iterator of all the TopologyBonds in this TopologyMolecule

**Returns****an iterator of openforcefield.topology.TopologyBonds****property n\_bonds**

Get the number of bonds in this TopologyMolecule

**Returns****int** [number of bonds]**property bond\_start\_topology\_index**

Get the topology index of the first bond in this TopologyMolecule

**particle(*index*)**

Get the TopologyParticle with a given reference molecule index in this TopologyMolecule

**Parameters****index** [int] Index of the TopologyParticle within this TopologyMolecule to retrieve**Returns****an openforcefield.topology.TopologyParticle**

**property particles**

Return an iterator of all the TopologyParticles in this TopologyMolecules

**Returns**

an iterator of `openforcefield.topology.TopologyParticle`

**property n\_particles**

Get the number of particles in this TopologyMolecule

**Returns**

`int` [The number of particles]

**virtual\_site(index)**

Get the TopologyVirtualSite with a given reference molecule index in this TopologyMolecule

**Parameters**

`index` [`int`] Index of the TopologyVirtualSite within this TopologyMolecule to retrieve

**Returns**

an `openforcefield.topology.TopologyVirtualSite`

**property virtual\_sites**

Return an iterator of all the TopologyVirtualSites in this TopologyMolecules

**Returns**

an iterator of `openforcefield.topology.TopologyVirtualSite`

**property n\_virtual\_sites**

Get the number of virtual sites in this TopologyMolecule

**Returns**

`int`

**property angles**

Iterable of `Tuple[TopologyAtom]`: iterator over the angles in this Topology.

**property n\_angles**

`int`: number of angles in this Topology.

**property propers**

Iterable of `Tuple[TopologyAtom]`: iterator over the proper torsions in this Topology.

**property n\_propers**

`int`: number of proper torsions in this Topology.

**property impropers**

Iterable of `Tuple[TopologyAtom]`: iterator over the improper torsions in this Topology.

**property n\_impropers**

`int`: number of proper torsions in this Topology.

**property virtual\_site\_start\_topology\_index**

Get the topology index of the first virtual site in this TopologyMolecule

**to\_dict()**

Convert to dictionary representation.

**classmethod from\_dict(d)**

Static constructor from dictionary representation.

## 2.1.2 Secondary objects

Particle	Base class for all particles in a molecule.
Atom	A particle representing a chemical atom.
Bond	Chemical bond representation.
VirtualSite	A container representing one or more virtual particles whose positions are defined in terms of Atom positions.
VirtualParticle	A single particle owned by a VirtualSite
TopologyVirtualParticle	
<b>Attributes</b>	
BondChargeVirtualSite	A particle representing a “Bond Charge”-type virtual site, in which the location of the charge is specified by the positions of two atoms.
MonovalentLonePairVirtualSite	A particle representing a “Monovalent Lone Pair”-type virtual site, in which the location of the charge is specified by the positions of three atoms.
DivalentLonePairVirtualSite	A particle representing a “Divalent Lone Pair”-type virtual site, in which the location of the charge is specified by the positions of three atoms.
TrivalentLonePairVirtualSite	A particle representing a “Trivalent Lone Pair”-type virtual site, in which the location of the charge is specified by the positions of four atoms.
TopologyAtom	A TopologyAtom is a lightweight data structure that represents a single openforcefield.topology.molecule.Atom in a Topology.
TopologyBond	A TopologyBond is a lightweight data structure that represents a single openforcefield.topology.molecule.Bond in a Topology.
TopologyVirtualSite	A TopologyVirtualSite is a lightweight data structure that represents a single openforcefield.topology.molecule.VirtualSite in a Topology.
ValenceDict	Enforce uniqueness in atom indices.
ImproperDict	Symmetrize improper torsions.

### openforcefield.topology.Particle

**class** openforcefield.topology.Particle  
Base class for all particles in a molecule.

A particle object could be an Atom or a VirtualSite.

**Warning:** This API is experimental and subject to change.

#### Attributes

**molecule** The Molecule this particle is part of.

**molecule\_particle\_index** Returns the index of this particle in its molecule

**name** The name of the particle

## Methods

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

`__init__(*args, **kwargs)`

Initialize self. See `help(type(self))` for accurate signature.

## Methods

<code>__init__(*args, **kwargs)</code>	Initialize self.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.

continues on next page

Table 16 – continued from previous page

<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

### Attributes

<code>molecule</code>	The Molecule this particle is part of.
<code>molecule_particle_index</code>	Returns the index of this particle in its molecule
<code>name</code>	The name of the particle

#### property `molecule`

The Molecule this particle is part of.

#### property `molecule_particle_index`

Returns the index of this particle in its molecule

#### property `name`

The name of the particle

#### `to_dict()`

Convert to dictionary representation.

#### classmethod `from_dict(d)`

Static constructor from dictionary representation.

#### classmethod `from_bson(serialized)`

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

##### Parameters

**serialized** [bytes] A BSON serialized representation of the object

##### Returns

**instance** [cls] An instantiated object

#### classmethod `from_json(serialized)`

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

##### Parameters

**serialized** [str] A JSON serialized representation of the object

##### Returns

**instance** [cls] An instantiated object

#### classmethod `from_messagepack(serialized)`

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_pickle**(*serialized*)

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_toml**(*serialized*)

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_xml**(*serialized*)

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_yaml**(*serialized*)

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**to\_bson**()

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.



Specification: <http://yaml.org/>

### Returns

**serialized** [str] A YAML serialized representation of the object

## openforcefield.topology.Atom

**class** openforcefield.topology.**Atom**(*atomic\_number*, *formal\_charge*, *is\_aromatic*, *name*=None, *molecule*=None, *stereochemistry*=None)

A particle representing a chemical atom.

Note that non-chemical virtual sites are represented by the `VirtualSite` object.

**Warning:** This API is experimental and subject to change.

### Attributes

**atomic\_number** The integer atomic number of the atom.

**bonded\_atoms** The list of `Atom` objects this atom is involved in bonds with

**bonds** The list of `Bond` objects this atom is involved in.

**element** The element name

**formal\_charge** The atom's formal charge

**is\_aromatic** The atom's `is_aromatic` flag

**is\_in\_ring** Return whether or not this atom is in a ring(s) (of any size)

**mass** The standard atomic weight (abundance-weighted isotopic mass) of the atomic site.

**molecule** The `Molecule` this particle is part of.

**molecule\_atom\_index** The index of this `Atom` within the the list of atoms in `Molecules`.

**molecule\_particle\_index** The index of this `Atom` within the the list of particles in the parent `Molecule`.

**name** The name of this atom, if any

**partial\_charge** The partial charge of the atom, if any.

**stereochemistry** The atom's stereochemistry (if defined, otherwise None)

**virtual\_sites** The list of `VirtualSite` objects this atom is involved in.

### Methods

<code>add_bond(bond)</code>	Adds a bond that this atom is involved in .
<code>add_virtual_site(vsite)</code>	Adds a bond that this atom is involved in .
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(atom_dict)</code>	Create an <code>Atom</code> from a dict representation.

continues on next page

Table 18 – continued from previous page

<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>is_bonded_to(atom2)</code>	Determine whether this atom is bound to another atom
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the atom.
<code>to_json(indent)</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml(indent)</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

**`__init__`**(*atomic\_number*, *formal\_charge*, *is\_aromatic*, *name=None*, *molecule=None*, *stereochemistry=None*)

Create an immutable Atom object.

Object is serializable and immutable.

#### Parameters

**`atomic_number`** [int] Atomic number of the atom

**`formal_charge`** [int or simtk.unit.Quantity-wrapped int with dimension “charge”]  
Formal charge of the atom

**`is_aromatic`** [bool] If True, atom is aromatic; if False, not aromatic

**`stereochemistry`** [str, optional, default=None] Either ‘R’ or ‘S’ for specified stereochemistry, or None for ambiguous stereochemistry

**`name`** [str, optional, default=None] An optional name to be associated with the atom

#### Examples

Create a non-aromatic carbon atom

```
>>> atom = Atom(6, 0, False)
```

Create a chiral carbon atom

```
>>> atom = Atom(6, 0, False, stereochemistry='R', name='CT')
```

## Methods

<code>__init__(atomic_number, formal_charge, ...)</code>	Create an immutable Atom object.
<code>add_bond(bond)</code>	Adds a bond that this atom is involved in .
<code>add_virtual_site(vsite)</code>	Adds a bond that this atom is involved in .
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(atom_dict)</code>	Create an Atom from a dict representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>is_bonded_to(atom2)</code>	Determine whether this atom is bound to another atom
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the atom.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>atomic_number</code>	The integer atomic number of the atom.
<code>bonded_atoms</code>	The list of Atom objects this atom is involved in bonds with
<code>bonds</code>	The list of Bond objects this atom is involved in.
<code>element</code>	The element name
<code>formal_charge</code>	The atom's formal charge
<code>is_aromatic</code>	The atom's <code>is_aromatic</code> flag
<code>is_in_ring</code>	Return whether or not this atom is in a ring(s) (of any size)
<code>mass</code>	The standard atomic weight (abundance-weighted isotopic mass) of the atomic site.
<code>molecule</code>	The Molecule this particle is part of.
<code>molecule_atom_index</code>	The index of this Atom within the the list of atoms in Molecules.
<code>molecule_particle_index</code>	The index of this Atom within the the list of particles in the parent Molecule.

continues on next page

Table 20 – continued from previous page

<code>name</code>	The name of this atom, if any
<code>partial_charge</code>	The partial charge of the atom, if any.
<code>stereochemistry</code>	The atom's stereochemistry (if defined, otherwise None)
<code>virtual_sites</code>	The list of VirtualSite objects this atom is involved in.

**add\_bond**(*bond*)

Adds a bond that this atom is involved in .. todo :: Is this how we want to keep records?

**Parameters**

**bond:** an `openforcefield.topology.molecule.Bond` A bond involving this atom

**add\_virtual\_site**(*vsite*)

Adds a bond that this atom is involved in .. todo :: Is this how we want to keep records?

**Parameters**

**bond:** an `openforcefield.topology.molecule.Bond` A bond involving this atom

**to\_dict**()

Return a dict representation of the atom.

**classmethod from\_dict**(*atom\_dict*)

Create an Atom from a dict representation.

**property formal\_charge**

The atom's formal charge

**property partial\_charge**

The partial charge of the atom, if any.

**Returns**

`simtk.unit.Quantity` with dimension of atomic charge, or None if no charge has been specified

**property is\_aromatic**

The atom's `is_aromatic` flag

**property stereochemistry**

The atom's stereochemistry (if defined, otherwise None)

**property element**

The element name

**property atomic\_number**

The integer atomic number of the atom.

**property mass**

The standard atomic weight (abundance-weighted isotopic mass) of the atomic site.

TODO (from jeff): Are there atoms that have different chemical properties based on their isotopes?

**property name**

The name of this atom, if any

**property bonds**

The list of Bond objects this atom is involved in.

**property `bonded_atoms`**

The list of Atom objects this atom is involved in bonds with

**property `is_bonded_to(atom2)`**

Determine whether this atom is bound to another atom

**Parameters**

**atom2:** `openforcefield.topology.molecule.Atom` a different atom in the same molecule

**Returns**

**bool** Whether this atom is bound to atom2

**property `is_in_ring`**

Return whether or not this atom is in a ring(s) (of any size)

**property `virtual_sites`**

The list of VirtualSite objects this atom is involved in.

**property `molecule_atom_index`**

The index of this Atom within the the list of atoms in Molecules. Note that this can be different from `molecule_particle_index`.

**property `molecule_particle_index`**

The index of this Atom within the the list of particles in the parent Molecule. Note that this can be different from `molecule_atom_index`.

**classmethod `from_bson(serialized)`**

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod `from_json(serialized)`**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod `from_messagepack(serialized)`**

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_pickle(serialized)`

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_toml(serialized)`

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**property** `molecule`

The Molecule this particle is part of.

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

## openforcefield.topology.Bond

**class** openforcefield.topology.Bond(*atom1*, *atom2*, *bond\_order*, *is\_aromatic*, *fractional\_bond\_order*=None, *stereochemistry*=None)

Chemical bond representation.

**Warning:** This API is experimental and subject to change.

### Attributes

**atom1, atom2** [openforcefield.topology.Atom] Atoms involved in the bond

**bondtype** [int] Discrete bond type representation for the Open Forcefield aromaticity model TODO: Do we want to pin ourselves to a single standard aromaticity model?

**type** [str] String based bond type

**order** [int] Integral bond order

**fractional\_bond\_order** [float, optional] Fractional bond order, or None.

**.. warning :: This API is experimental and subject to change.**

### Methods

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(molecule, d)</code>	Create a Bond from a dict representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the bond.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

**\_\_init\_\_**(*atom1*, *atom2*, *bond\_order*, *is\_aromatic*, *fractional\_bond\_order*=None, *stereochemistry*=None)



Create a new chemical bond.

## Methods

<code>__init__(atom1, atom2, bond_order, is_aromatic)</code>	Create a new chemical bond.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(molecule, d)</code>	Create a Bond from a dict representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the bond.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>atom1</code>	
<code>atom1_index</code>	
<code>atom2</code>	
<code>atom2_index</code>	
<code>atoms</code>	
<code>bond_order</code>	
<code>fractional_bond_order</code>	
<code>is_aromatic</code>	
<code>is_in_ring</code>	Return whether or not this bond is in a ring(s) (of any size)
<code>molecule</code>	
<code>molecule_bond_index</code>	The index of this Bond within the the list of bonds in Molecules.
<code>stereochemistry</code>	

### `to_dict()`

Return a dict representation of the bond.

**classmethod** `from_dict(molecule, d)`

Create a Bond from a dict representation.

**property** `molecule_bond_index`

The index of this Bond within the the list of bonds in Molecules.

**property** `is_in_ring`

Return whether or not this bond is in a ring(s) (of any size)

**classmethod** `from_bson(serialized)`

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_json(serialized)`

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_messagepack(serialized)`

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_pickle(serialized)`

Instantiate an object from a pickle serialized representation.

<p><b>Warning:</b> This is not recommended for safe, stable storage since the pickle specification may change between Python versions.</p>
--

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_toml(serialized)`

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

#### Returns

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

#### Returns

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

#### Parameters

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

#### Returns

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

#### Returns

**serialized** [str] A YAML serialized representation of the object

## openforcefield.topology.VirtualSite

```
class openforcefield.topology.VirtualSite(atoms, charge_increments=None, epsilon=None,
                                          sigma=None, rmin_half=None, name=None, orientations=None)
```

A container representing one or more virtual particles whose positions are defined in terms of Atom positions. This container enables the coupling of particles that are symmetric about some axis/plane of the underlying atoms. For example, a single virtual site can represent two lone pairs of a water molecule, where the angle and distance parameters are expected to stay coupled, and are reflections across the plane of symmetry.

Note that chemical atoms are represented by the Atom.

**Warning:** This API is experimental and subject to change.

### Attributes

**atoms** Atoms on whose position this VirtualSite depends.

**charge\_increments** Charges taken from this VirtualSite's atoms and given to the VirtualSite

**epsilon** The VdW epsilon term of this VirtualSite

**molecule** The Molecule this particle is part of.

**molecule\_particle\_index** Returns the index of this particle in its molecule

**molecule\_virtual\_site\_index** The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from particle\_index.

**n\_particles** The number of particles that the virtual site represents

**name** The name of this VirtualSite

**orientations**

**particles** Particles owned by this VirtualSite

**rmin\_half** The VdW rmin\_half term of this VirtualSite

**sigma** The VdW sigma term of this VirtualSite

**type** The type of this VirtualSite (returns the class name as string)

### Methods

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Create a virtual site from a dict representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.

continues on next page

Table 24 – continued from previous page

<code>to_yaml()</code>	Return a YAML serialized representation.
------------------------	--

<b>index_of_orientation</b>
-----------------------------

**\_\_init\_\_**(atoms, charge\_increments=None, epsilon=None, sigma=None, rmin\_half=None, name=None, orientations=None)

Base class for VirtualSites

#### Parameters

**atoms** [list of Atom of shape [N]] atoms[index] is the corresponding Atom for weights[index]

**charge\_increments** [list of floats of shape [N], optional, default=None] The amount of charge to remove from the VirtualSite's atoms and put in the VirtualSite. Indexing in this list should match the ordering in the atoms list. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] Rmin\_half term for VdW properties of virtual site. Default is None.

**name** [string or None, default=None] The name of this virtual site. Default is None.

**virtual\_site\_type** [str] Virtual site type.

**name** [str or None, default=None] The name of this virtual site. Default is None

#### Methods

<code>__init__(atoms[, charge_increments, ...])</code>	Base class for VirtualSites
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Create a virtual site from a dict representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>index_of_orientation(virtual_particle)</code>	
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.

continues on next page

Table 25 – continued from previous page

<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

**Attributes**

<code>atoms</code>	Atoms on whose position this VirtualSite depends.
<code>charge_increments</code>	Charges taken from this VirtualSite's atoms and given to the VirtualSite
<code>epsilon</code>	The VdW epsilon term of this VirtualSite
<code>molecule</code>	The Molecule this particle is part of.
<code>molecule_particle_index</code>	Returns the index of this particle in its molecule
<code>molecule_virtual_site_index</code>	The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from <code>particle_index</code> .
<code>n_particles</code>	The number of particles that the virtual site represents
<code>name</code>	The name of this VirtualSite
<code>orientations</code>	
<code>particles</code>	Particles owned by this VirtualSite
<code>rmin_half</code>	The VdW <code>rmin_half</code> term of this VirtualSite
<code>sigma</code>	The VdW sigma term of this VirtualSite
<code>type</code>	The type of this VirtualSite (returns the class name as string)

**to\_dict()**

Return a dict representation of the virtual site.

**classmethod from\_dict(*vsite\_dict*)**

Create a virtual site from a dict representation.

**property particles**

Particles owned by this VirtualSite

**property n\_particles**

The number of particles that the virtual site represents

**property molecule\_virtual\_site\_index**

The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from `particle_index`.

**property atoms**

Atoms on whose position this VirtualSite depends.

**property charge\_increments**

Charges taken from this VirtualSite's atoms and given to the VirtualSite

**property epsilon**

The VdW epsilon term of this VirtualSite

**property** `sigma`

The VdW sigma term of this VirtualSite

**property** `rmin_half`

The VdW `rmin_half` term of this VirtualSite

**property** `name`

The name of this VirtualSite

**property** `type`

The type of this VirtualSite (returns the class name as string)

**classmethod** `from_bson(serialized)`

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_json(serialized)`

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_messagepack(serialized)`

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_pickle(serialized)`

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object



**classmethod** `from_toml(serialized)`

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**property** `molecule`

The Molecule this particle is part of.

**property** `molecule_particle_index`

Returns the index of this particle in its molecule

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**openforcefield.topology.VirtualParticle**

**class** openforcefield.topology.**VirtualParticle**(*vsite*, *orientation*, *name=None*)

A single particle owned by a VirtualSite

**Warning:** This API is experimental and subject to change.

**Attributes**

**molecule** The Molecule this particle is part of.

**molecule\_particle\_index** Returns the index of this particle in its molecule

**name** The name of the particle

**orientation**

**virtual\_site**

**virtual\_site\_particle\_index** The index of the particle relative to its owning virtual site.

**Methods**

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

**\_\_init\_\_**(*vsite*, *orientation*, *name=None*)

A single particle owned by a VirtualSite

**Parameters**

**vsite** [openforcefield.topology.VirtualSite] The parent VirtualSite of this VirtualParticle

**orientation** [tuple of int] Molecule atom indices of parent atoms

**name** [str, optional] The name of the particle

## Methods

<code>__init__(vsite, orientation[, name])</code>	A single particle owned by a VirtualSite
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>molecule</code>	The Molecule this particle is part of.
<code>molecule_particle_index</code>	Returns the index of this particle in its molecule
<code>name</code>	The name of the particle
<code>orientation</code>	
<code>virtual_site</code>	
<code>virtual_site_particle_index</code>	The index of the particle relative to its owning virtual site.

### property `virtual_site_particle_index`

The index of the particle relative to its owning virtual site. Normally this should either be 0 or 1.

### classmethod `from_bson(serialized)`

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_dict(*d*)**

Static constructor from dictionary representation.

**classmethod from\_json(*serialized*)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_messagepack(*serialized*)**

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_pickle(*serialized*)**

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_toml(*serialized*)**

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**property** `molecule`

The Molecule this particle is part of.

**property** `molecule_particle_index`

Returns the index of this particle in its molecule

**property** `name`

The name of the particle

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_dict()**

Convert to dictionary representation.

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

#### Returns

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

#### Returns

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

#### Parameters

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

#### Returns

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

#### Returns

**serialized** [str] A YAML serialized representation of the object

### openforcefield.topology.TopologyVirtualParticle

**class** openforcefield.topology.TopologyVirtualParticle(*virtual\_site*, *virtual\_particle*, *topology\_molecule*)

#### Attributes

**atoms** Get the TopologyAtoms involved in this TopologyVirtualSite.

**molecule** Get the reference Molecule that this TopologyVirtualSite belongs to.

**n\_particles** Get the number of particles represented by this VirtualSite

**particles** Get an iterator to the reference particles that this TopologyVirtualSite contains.

**topology\_molecule** Get the TopologyMolecule that this TopologyVirtualSite belongs to.

**topology\_particle\_index** Get the index of this particle in its parent Topology.

**topology\_virtual\_particle\_start\_index** Get the index of the first virtual site particle in its parent Topology.

**topology\_virtual\_site\_index** Get the index of this virtual site in its parent Topology.

**type** Get the type of this virtual site

**virtual\_site** Get the reference VirtualSite for this TopologyVirtualSite.

## Methods

<code>atom(index)</code>	Get the atom at a specific index in this TopologyVirtualSite
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

<code>invalidate_cached_data</code>	
-------------------------------------	--

`__init__(virtual_site, virtual_particle, topology_molecule)`

## Parameters

**virtual\_site** [An `openforcefield.topology.molecule.VirtualSite`] The reference virtual site

**topology\_molecule** [An `openforcefield.topology.TopologyMolecule`] The TopologyMolecule that this TopologyVirtualSite belongs to



## Methods

<code>__init__(virtual_site, virtual_particle, ...)</code>	
	Parameters
<code>atom(index)</code>	Get the atom at a specific index in this TopologyVirtualSite
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>invalidate_cached_data()</code>	
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>atoms</code>	Get the TopologyAtoms involved in this TopologyVirtualSite.
<code>molecule</code>	Get the reference Molecule that this TopologyVirtualSite belongs to.
<code>n_particles</code>	Get the number of particles represented by this VirtualSite
<code>particles</code>	Get an iterator to the reference particles that this TopologyVirtualSite contains.
<code>topology_molecule</code>	Get the TopologyMolecule that this TopologyVirtualSite belongs to.
<code>topology_particle_index</code>	Get the index of this particle in its parent Topology.
<code>topology_virtual_particle_start_index</code>	Get the index of the first virtual site particle in its parent Topology.

continues on next page

Table 32 – continued from previous page

<code>topology_virtual_site_index</code>	Get the index of this virtual site in its parent Topology.
<code>type</code>	Get the type of this virtual site
<code>virtual_site</code>	Get the reference VirtualSite for this TopologyVirtualSite.

**property topology\_particle\_index**

Get the index of this particle in its parent Topology.

**Returns**

**idx** [int] The index of this particle in its parent topology.

**atom(index)**

Get the atom at a specific index in this TopologyVirtualSite

**Parameters**

**index** [int] The index of the atom in the reference VirtualSite to retrieve

**Returns**

**TopologyAtom**

**property atoms**

Get the TopologyAtoms involved in this TopologyVirtualSite.

**Returns**

**iterator of openforcefield.topology.TopologyAtom**

**classmethod from\_bson(serialized)**

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_dict(d)**

Static constructor from dictionary representation.

**classmethod from\_json(serialized)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_messagepack(serialized)**

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

#### Returns

**instance** [cls] Instantiated object.

**classmethod from\_pickle**(*serialized*)

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

#### Parameters

**serialized** [str] A pickled representation of the object

#### Returns

**instance** [cls] An instantiated object

**classmethod from\_toml**(*serialized*)

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

#### Parameters

**serialized** [str] A TOML serialized representation of the object

#### Returns

**instance** [cls] An instantiated object

**classmethod from\_xml**(*serialized*)

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

#### Parameters

**serialized** [bytes] An XML serialized representation

#### Returns

**instance** [cls] Instantiated object.

**classmethod from\_yaml**(*serialized*)

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

#### Parameters

**serialized** [str] A YAML serialized representation of the object

#### Returns

**instance** [cls] Instantiated object

**property molecule**

Get the reference Molecule that this TopologyVirtualSite belongs to.

#### Returns

`openforcefield.topology.molecule.Molecule`

**property n\_particles**

Get the number of particles represented by this VirtualSite

**Returns**

**int** [The number of particles]

**property particles**

Get an iterator to the reference particles that this TopologyVirtualSite contains.

**Returns**

**iterator of TopologyVirtualParticles**

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_dict()**

Convert to dictionary representation.

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**property topology\_molecule**

Get the TopologyMolecule that this TopologyVirtualSite belongs to.

**Returns**

**openforcefield.topology.TopologyMolecule**

**property topology\_virtual\_particle\_start\_index**

Get the index of the first virtual site particle in its parent Topology.

**Returns**

**int** The index of this particle in its parent topology.

**property topology\_virtual\_site\_index**

Get the index of this virtual site in its parent Topology.

**Returns**

**int** The index of this virtual site in its parent topology.

**property type**

Get the type of this virtual site

**Returns**

**str** [The class name of this virtual site]

**property virtual\_site**

Get the reference VirtualSite for this TopologyVirtualSite.

**Returns**

**an openforcefield.topology.molecule.VirtualSite**

**openforcefield.topology.BondChargeVirtualSite**

```
class openforcefield.topology.BondChargeVirtualSite(atoms, distance, charge_increments=None,
                                                    epsilon=None,          sigma=None,
                                                    rmin_half=None,   name=None,   orien-
                                                    tations=None)
```

A particle representing a “Bond Charge”-type virtual site, in which the location of the charge is specified by the positions of two atoms. This supports placement of a virtual site *S* along a vector between two specified atoms, e.g. to allow for a sigma hole for halogens or similar contexts. With positive values of the distance, the virtual site lies outside the first indexed atom.

**Warning:** This API is experimental and subject to change.

**Attributes**

- atoms** Atoms on whose position this VirtualSite depends.
- charge\_increments** Charges taken from this VirtualSite’s atoms and given to the VirtualSite
- distance** The distance parameter of the virtual site
- epsilon** The VdW epsilon term of this VirtualSite
- molecule** The Molecule this particle is part of.
- molecule\_particle\_index** Returns the index of this particle in its molecule
- molecule\_virtual\_site\_index** The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from `particle_index`.
- n\_particles** The number of particles that the virtual site represents
- name** The name of this VirtualSite
- orientations**
- particles** Particles owned by this VirtualSite
- rmin\_half** The VdW `rmin_half` term of this VirtualSite
- sigma** The VdW sigma term of this VirtualSite
- type** The type of this VirtualSite (returns the class name as string)

**Methods**

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Create a virtual site from a dict representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.

continues on next page

Table 33 – continued from previous page

<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_openmm_virtual_site(atoms)</code>	Returns the OpenMMVirtualSite corresponding to this BondChargeVirtualSite.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

<b>index_of_orientation</b>	
-----------------------------	--

**\_\_init\_\_**(*atoms*, *distance*, *charge\_increments*=None, *epsilon*=None, *sigma*=None, *rmin\_half*=None, *name*=None, *orientations*=None)

Create a bond charge-type virtual site, in which the location of the charge is specified by the position of two atoms. This supports placement of a virtual site S along a vector between two specified atoms, e.g. to allow for a sigma hole for halogens or similar contexts. With positive values of the distance, the virtual site lies outside the first indexed atom.

TODO: One of the examples on <https://open-forcefield-toolkit.readthedocs.io/en/topology/smirnoff.html#virtualsites-virtual-sites-for-off-atom-charges> has a BondCharge defined with three atoms – How does that work?

#### Parameters

**atoms** [list of openforcefield.topology.molecule.Atom objects of shape [N]] The atoms defining the virtual site's position

**distance** [float]

**weights** [list of floats of shape [N] or None, optional, default=None] *weights[index]* is the weight of *particles[index]* contributing to the position of the virtual site. Default is None

**charge\_increments** [list of floats of shape [N], optional, default=None] The amount of charge to remove from the VirtualSite's atoms and put in the VirtualSite. Indexing in this list should match the ordering in the atoms list. Default is None.

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] *rmin\_half* term for VdW properties of virtual site. Default is None.

**name** [string or None, default=None] The name of this virtual site. Default is None.

**orientations** [list of tuples of 3 Atoms or ints] The permutations of the matched atoms that should be used to define the orientation of each virtual site particle

## Methods

<code>__init__(atoms, distance[, ...])</code>	Create a bond charge-type virtual site, in which the location of the charge is specified by the position of two atoms.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Create a virtual site from a dict representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_openmm_virtual_site(atoms)</code>	Returns the OpenMMVirtualSite corresponding to this BondChargeVirtualSite.
<code>index_of_orientation(virtual_particle)</code>	
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>atoms</code>	Atoms on whose position this VirtualSite depends.
<code>charge_increments</code>	Charges taken from this VirtualSite's atoms and given to the VirtualSite
<code>distance</code>	The distance parameter of the virtual site
<code>epsilon</code>	The VdW epsilon term of this VirtualSite
<code>molecule</code>	The Molecule this particle is part of.
<code>molecule_particle_index</code>	Returns the index of this particle in its molecule
<code>molecule_virtual_site_index</code>	The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from <code>particle_index</code> .
<code>n_particles</code>	The number of particles that the virtual site represents
<code>name</code>	The name of this VirtualSite
<code>orientations</code>	

continues on next page



Table 35 – continued from previous page

<code>particles</code>	Particles owned by this VirtualSite
<code>rmin_half</code>	The VdW <code>rmin_half</code> term of this VirtualSite
<code>sigma</code>	The VdW <code>sigma</code> term of this VirtualSite
<code>type</code>	The type of this VirtualSite (returns the class name as string)

**to\_dict()**

Return a dict representation of the virtual site.

**classmethod from\_dict(*vsite\_dict*)**

Create a virtual site from a dict representation.

**property distance**

The distance parameter of the virtual site

**get\_openmm\_virtual\_site(*atoms*)**

Returns the OpenMMVirtualSite corresponding to this BondChargeVirtualSite.

**Parameters**

**atoms** [iterable of int] The indices of the atoms involved in this virtual site (not assumed to be the same as the molecule indices as this method may be accessed with regard to particles in a Topology).

**Returns**

**virtual\_site** [a simtk.openmm LocalCoordinatesSite]

**property atoms**

Atoms on whose position this VirtualSite depends.

**property charge\_increments**

Charges taken from this VirtualSite's atoms and given to the VirtualSite

**property epsilon**

The VdW epsilon term of this VirtualSite

**classmethod from\_bson(*serialized*)**

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_json(*serialized*)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_messagepack(serialized)`

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_pickle(serialized)`

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_toml(serialized)`

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**property molecule**

The Molecule this particle is part of.

**property molecule\_particle\_index**

Returns the index of this particle in its molecule

**property molecule\_virtual\_site\_index**

The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from particle\_index.

**property n\_particles**

The number of particles that the virtual site represents

**property name**

The name of this VirtualSite

**property particles**

Particles owned by this VirtualSite

**property rmin\_half**

The VdW rmin\_half term of this VirtualSite

**property sigma**

The VdW sigma term of this VirtualSite

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**property type**

The type of this VirtualSite (returns the class name as string)

**openforcefield.topology.MonovalentLonePairVirtualSite**

```
class openforcefield.topology.MonovalentLonePairVirtualSite(atoms, distance,
                                                             out_of_plane_angle,
                                                             in_plane_angle,
                                                             charge_increments=None, ep-
                                                             silon=None, sigma=None,
                                                             rmin_half=None, name=None,
                                                             orientations=None)
```

A particle representing a “Monovalent Lone Pair”-type virtual site, in which the location of the charge is specified by the positions of three atoms. This is originally intended for situations like a carbonyl, and allows placement of a virtual site S at a specified distance d, in\_plane\_angle, and out\_of\_plane\_angle relative to a central atom and two connected atoms.

**Warning:** This API is experimental and subject to change.

**Attributes**

**atoms** Atoms on whose position this VirtualSite depends.

**charge\_increments** Charges taken from this VirtualSite's atoms and given to the VirtualSite

**distance** The distance parameter of the virtual site

**epsilon** The VdW epsilon term of this VirtualSite

**in\_plane\_angle** The in\_plane\_angle parameter of the virtual site

**molecule** The Molecule this particle is part of.

**molecule\_particle\_index** Returns the index of this particle in its molecule

**molecule\_virtual\_site\_index** The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from particle\_index.

**n\_particles** The number of particles that the virtual site represents

**name** The name of this VirtualSite

**orientations**

**out\_of\_plane\_angle** The out\_of\_plane\_angle parameter of the virtual site

**particles** Particles owned by this VirtualSite

**rmin\_half** The VdW rmin\_half term of this VirtualSite

**sigma** The VdW sigma term of this VirtualSite

**type** The type of this VirtualSite (returns the class name as string)

## Methods

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Construct a new MonovalentLonePairVirtualSite from an serialized dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_openmm_virtual_site(atoms)</code>	Returns the OpenMMVirtualSite corresponding to this MonovalentLonePairVirtualSite.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.

continues on next page

Table 36 – continued from previous page

<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

<b>index_of_orientation</b>	
-----------------------------	--

**\_\_init\_\_**(*atoms*, *distance*, *out\_of\_plane\_angle*, *in\_plane\_angle*, *charge\_increments=None*, *epsilon=None*, *sigma=None*, *rmin\_half=None*, *name=None*, *orientations=None*)  
 Create a bond charge-type virtual site, in which the location of the charge is specified by the position of three atoms.

**Parameters**

**atoms** [list of three openforcefield.topology.molecule.Atom objects] The three atoms defining the virtual site's position

**distance** [float]

**out\_of\_plane\_angle** [float]

**in\_plane\_angle** [float]

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] Rmin\_half term for VdW properties of virtual site. Default is None.

**name** [string or None, default=None] The name of this virtual site. Default is None.

**orientations** [list of tuples of 3 Atoms or ints] The permutations of the matched atoms that should be used to define the orientation of each virtual site particle

**Methods**

<code>__init__(atoms, distance, ...[, ...])</code>	Create a bond charge-type virtual site, in which the location of the charge is specified by the position of three atoms.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Construct a new MonovalentLonePairVirtualSite from an serialized dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.

continues on next page

Table 37 – continued from previous page

<code>get_openmm_virtual_site(atoms)</code>	Returns the OpenMMVirtualSite corresponding to this MonovalentLonePairVirtualSite.
<code>index_of_orientation(virtual_particle)</code>	
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

**Attributes**

<code>atoms</code>	Atoms on whose position this VirtualSite depends.
<code>charge_increments</code>	Charges taken from this VirtualSite's atoms and given to the VirtualSite
<code>distance</code>	The distance parameter of the virtual site
<code>epsilon</code>	The VdW epsilon term of this VirtualSite
<code>in_plane_angle</code>	The <code>in_plane_angle</code> parameter of the virtual site
<code>molecule</code>	The Molecule this particle is part of.
<code>molecule_particle_index</code>	Returns the index of this particle in its molecule
<code>molecule_virtual_site_index</code>	The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from <code>particle_index</code> .
<code>n_particles</code>	The number of particles that the virtual site represents
<code>name</code>	The name of this VirtualSite
<code>orientations</code>	
<code>out_of_plane_angle</code>	The <code>out_of_plane_angle</code> parameter of the virtual site
<code>particles</code>	Particles owned by this VirtualSite
<code>rmin_half</code>	The VdW <code>rmin_half</code> term of this VirtualSite
<code>sigma</code>	The VdW sigma term of this VirtualSite
<code>type</code>	The type of this VirtualSite (returns the class name as string)

**to\_dict()**

Return a dict representation of the virtual site.

**classmethod from\_dict(vsite\_dict)**

Construct a new MonovalentLonePairVirtualSite from an serialized dictionary representation.

**Parameters**

**vsite\_dict** [dict] The VirtualSite to deserialize.

**Returns**

The newly created MonovalentLonePairVirtualSite

**property distance**

The distance parameter of the virtual site

**property in\_plane\_angle**

The in\_plane\_angle parameter of the virtual site

**property out\_of\_plane\_angle**

The out\_of\_plane\_angle parameter of the virtual site

**get\_openmm\_virtual\_site**(*atoms*)

Returns the OpenMMVirtualSite corresponding to this MonovalentLonePairVirtualSite.

**Parameters**

**atoms** [iterable of int] The indices of the atoms involved in this virtual site (not assumed to be the same as the molecule indices as this method may be accessed with regard to particles in a Topology).

**Returns**

**virtual\_site** [a simtk.openmm LocalCoordinatesSite]

**property atoms**

Atoms on whose position this VirtualSite depends.

**property charge\_increments**

Charges taken from this VirtualSite's atoms and given to the VirtualSite

**property epsilon**

The VdW epsilon term of this VirtualSite

**classmethod from\_bson**(*serialized*)

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_json**(*serialized*)

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_messagepack**(*serialized*)

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.



**classmethod** `from_pickle(serialized)`

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_toml(serialized)`

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**property** `molecule`

The Molecule this particle is part of.

**property** `molecule_particle_index`

Returns the index of this particle in its molecule

**property** `molecule_virtual_site_index`

The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from `particle_index`.

**property n\_particles**

The number of particles that the virtual site represents

**property name**

The name of this VirtualSite

**property particles**

Particles owned by this VirtualSite

**property rmin\_half**

The VdW rmin\_half term of this VirtualSite

**property sigma**

The VdW sigma term of this VirtualSite

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**property type**

The type of this VirtualSite (returns the class name as string)

**openforcefield.topology.DivalentLonePairVirtualSite**

```
class openforcefield.topology.DivalentLonePairVirtualSite(atoms, distance,
                                                         out_of_plane_angle,
                                                         charge_increments=None, epsilon=None,
                                                         sigma=None,
                                                         rmin_half=None, name=None,
                                                         orientations=None)
```

A particle representing a “Divalent Lone Pair”-type virtual site, in which the location of the charge is specified by the positions of three atoms. This is suitable for cases like four-point and five-point water models as well as pyrimidine; a charge site *S* lies a specified distance *d* from the central atom among three atoms along the bisector of the angle between the atoms (if *out\_of\_plane\_angle* is zero) or out of the plane by the specified angle (if *out\_of\_plane\_angle* is nonzero) with its projection along the bisector. For positive values of the distance *d* the virtual site lies outside the 2-1-3 angle and for negative values it lies inside.

**Warning:** This API is experimental and subject to change.

**Attributes**

**atoms** Atoms on whose position this VirtualSite depends.

**charge\_increments** Charges taken from this VirtualSite’s atoms and given to the VirtualSite

**distance** The distance parameter of the virtual site

**epsilon** The VdW epsilon term of this VirtualSite

**molecule** The Molecule this particle is part of.

**molecule\_particle\_index** Returns the index of this particle in its molecule

**molecule\_virtual\_site\_index** The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from particle\_index.

**n\_particles** The number of particles that the virtual site represents

**name** The name of this VirtualSite

**orientations**

**out\_of\_plane\_angle** The out\_of\_plane\_angle parameter of the virtual site

**particles** Particles owned by this VirtualSite

**rmin\_half** The VdW rmin\_half term of this VirtualSite

**sigma** The VdW sigma term of this VirtualSite

**type** The type of this VirtualSite (returns the class name as string)

## Methods

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Construct a new DivalentLonePairVirtualSite from an serialized dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_openmm_virtual_site(atoms)</code>	Returns the OpenMMVirtualSite corresponding to this DivalentLonePairVirtualSite.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## index\_of\_orientation

**\_\_init\_\_**(atoms, distance, out\_of\_plane\_angle, charge\_increments=None, epsilon=None, sigma=None, rmin\_half=None, name=None, orientations=None)

Create a divalent lone pair-type virtual site, in which the location of the charge is specified by the

position of three atoms.

### Parameters

**atoms** [list of 3 openforcefield.topology.molecule.Atom objects] The three atoms defining the virtual site's position

**distance** [float]

**out\_of\_plane\_angle** [float]

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] Rmin\_half term for VdW properties of virtual site. Default is None.

**name** [string or None, default=None] The name of this virtual site. Default is None.

**orientations** [list of tuples of 3 Atoms or ints] The permutations of the matched atoms that should be used to define the orientation of each virtual site particle

### Methods

<code>__init__(atoms, distance, out_of_plane_angle)</code>	Create a divalent lone pair-type virtual site, in which the location of the charge is specified by the position of three atoms.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Construct a new DivalentLonePairVirtualSite from an serialized dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_openmm_virtual_site(atoms)</code>	Returns the OpenMMVirtualSite corresponding to this DivalentLonePairVirtualSite.
<code>index_of_orientation(virtual_particle)</code>	
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>atoms</code>	Atoms on whose position this VirtualSite depends.
<code>charge_increments</code>	Charges taken from this VirtualSite's atoms and given to the VirtualSite
<code>distance</code>	The distance parameter of the virtual site
<code>epsilon</code>	The VdW epsilon term of this VirtualSite
<code>molecule</code>	The Molecule this particle is part of.
<code>molecule_particle_index</code>	Returns the index of this particle in its molecule
<code>molecule_virtual_site_index</code>	The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from <code>particle_index</code> .
<code>n_particles</code>	The number of particles that the virtual site represents
<code>name</code>	The name of this VirtualSite
<code>orientations</code>	
<code>out_of_plane_angle</code>	The <code>out_of_plane_angle</code> parameter of the virtual site
<code>particles</code>	Particles owned by this VirtualSite
<code>rmin_half</code>	The VdW <code>rmin_half</code> term of this VirtualSite
<code>sigma</code>	The VdW <code>sigma</code> term of this VirtualSite
<code>type</code>	The type of this VirtualSite (returns the class name as string)

### `to_dict()`

Return a dict representation of the virtual site.

### `classmethod from_dict(vsite_dict)`

Construct a new DivalentLonePairVirtualSite from an serialized dictionary representation.

#### Parameters

**`vsite_dict`** [dict] The VirtualSite to deserialize.

#### Returns

The newly created DivalentLonePairVirtualSite

### `property distance`

The distance parameter of the virtual site

### `property out_of_plane_angle`

The `out_of_plane_angle` parameter of the virtual site

### `get_openmm_virtual_site(atoms)`

Returns the OpenMMVirtualSite corresponding to this DivalentLonePairVirtualSite.

#### Parameters

**`atoms`** [iterable of int] The indices of the atoms involved in this virtual site (not assumed to be the same as the molecule indices as this method may be accessed with regard to particles in a Topology).

#### Returns

**`virtual_site`** [a simtk.openmm LocalCoordinatesSite]

**property atoms**

Atoms on whose position this VirtualSite depends.

**property charge\_increments**

Charges taken from this VirtualSite's atoms and given to the VirtualSite

**property epsilon**

The VdW epsilon term of this VirtualSite

**classmethod from\_bson(*serialized*)**

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_json(*serialized*)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_messagepack(*serialized*)**

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_pickle(*serialized*)**

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_toml(serialized)`

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**property** `molecule`

The Molecule this particle is part of.

**property** `molecule_particle_index`

Returns the index of this particle in its molecule

**property** `molecule_virtual_site_index`

The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from `particle_index`.

**property** `n_particles`

The number of particles that the virtual site represents

**property** `name`

The name of this VirtualSite

**property** `particles`

Particles owned by this VirtualSite

**property** `rmin_half`

The VdW `rmin_half` term of this VirtualSite

**property** `sigma`

The VdW `sigma` term of this VirtualSite

**to\_bson()**

Return a BSON serialized representation.



Specification: <http://bsonspec.org/>

#### Returns

**serialized** [bytes] A BSON serialized representation of the object

**to\_json**(*indent=None*)

Return a JSON serialized representation.

Specification: <https://www.json.org/>

#### Parameters

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

#### Returns

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack**()

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

#### Returns

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle**()

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

#### Returns

**serialized** [str] A pickled representation of the object

**to\_toml**()

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

#### Returns

**serialized** [str] A TOML serialized representation of the object

**to\_xml**(*indent=2*)

Return an XML representation.

Specification: <https://www.w3.org/XML/>

#### Parameters

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

#### Returns

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**property type**

The type of this VirtualSite (returns the class name as string)

## openforcefield.topology.TrivalentLonePairVirtualSite

```
class openforcefield.topology.TrivalentLonePairVirtualSite(atoms, distance,
                                                           charge_increments=None, epsilon=None,
                                                           sigma=None,
                                                           rmin_half=None, name=None,
                                                           orientations=None)
```

A particle representing a “Trivalent Lone Pair”-type virtual site, in which the location of the charge is specified by the positions of four atoms. This is suitable for planar or tetrahedral nitrogen lone pairs; a charge site *S* lies above the central atom (e.g. nitrogen a distance *d* along the vector perpendicular to the plane of the three connected atoms (2,3,4). With positive values of *d* the site lies above the nitrogen and with negative values it lies below the nitrogen.

**Warning:** This API is experimental and subject to change.

### Attributes

**atoms** Atoms on whose position this VirtualSite depends.

**charge\_increments** Charges taken from this VirtualSite’s atoms and given to the VirtualSite

**distance** The distance parameter of the virtual site

**epsilon** The VdW epsilon term of this VirtualSite

**molecule** The Molecule this particle is part of.

**molecule\_particle\_index** Returns the index of this particle in its molecule

**molecule\_virtual\_site\_index** The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from `particle_index`.

**n\_particles** The number of particles that the virtual site represents

**name** The name of this VirtualSite

**orientations**

**particles** Particles owned by this VirtualSite

**rmin\_half** The VdW `rmin_half` term of this VirtualSite

**sigma** The VdW sigma term of this VirtualSite

**type** The type of this VirtualSite (returns the class name as string)

## Methods

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Construct a new TrivalentPairVirtualSite from an serialized dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_openmm_virtual_site(atoms)</code>	Returns the OpenMMVirtualSite corresponding to this TrivalentLonePairVirtualSite.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

<b>index_of_orientation</b>	
-----------------------------	--

**\_\_init\_\_**(*atoms*, *distance*, *charge\_increments=None*, *epsilon=None*, *sigma=None*, *rmin\_half=None*, *name=None*, *orientations=None*)  
 Create a trivalent lone pair-type virtual site, in which the location of the charge is specified by the position of four atoms.

### Parameters

**atoms** [list of 4 openforcefield.topology.molecule.Atom objects] The three atoms defining the virtual site's position

**distance** [float]

**epsilon** [float] Epsilon term for VdW properties of virtual site. Default is None.

**sigma** [float, default=None] Sigma term for VdW properties of virtual site. Default is None.

**rmin\_half** [float] Rmin\_half term for VdW properties of virtual site. Default is None.

**name** [string or None, default=None] The name of this virtual site. Default is None.

**orientations** [list of tuples of 3 Atoms or ints] The permutations of the matched atoms that should be used to define the orientation of each virtual site particle

## Methods

<code>__init__(atoms, distance[, ...])</code>	Create a trivalent lone pair-type virtual site, in which the location of the charge is specified by the position of four atoms.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(vsite_dict)</code>	Construct a new TrivalentPairVirtualSite from an serialized dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>get_openmm_virtual_site(atoms)</code>	Returns the OpenMMVirtualSite corresponding to this TrivalentLonePairVirtualSite.
<code>index_of_orientation(virtual_particle)</code>	
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Return a dict representation of the virtual site.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>atoms</code>	Atoms on whose position this VirtualSite depends.
<code>charge_increments</code>	Charges taken from this VirtualSite's atoms and given to the VirtualSite
<code>distance</code>	The distance parameter of the virtual site
<code>epsilon</code>	The VdW epsilon term of this VirtualSite
<code>molecule</code>	The Molecule this particle is part of.
<code>molecule_particle_index</code>	Returns the index of this particle in its molecule
<code>molecule_virtual_site_index</code>	The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from <code>particle_index</code> .
<code>n_particles</code>	The number of particles that the virtual site represents
<code>name</code>	The name of this VirtualSite

continues on next page

Table 44 – continued from previous page

<code>orientations</code>	
<code>particles</code>	Particles owned by this VirtualSite
<code>rmin_half</code>	The VdW <code>rmin_half</code> term of this VirtualSite
<code>sigma</code>	The VdW <code>sigma</code> term of this VirtualSite
<code>type</code>	The type of this VirtualSite (returns the class name as string)

**to\_dict()**

Return a dict representation of the virtual site.

**classmethod from\_dict(*vsite\_dict*)**

Construct a new TrivalentPairVirtualSite from an serialized dictionary representation.

**Parameters**

**vsite\_dict** [dict] The VirtualSite to deserialize.

**Returns**

The newly created TrivalentLonePairVirtualSite

**property distance**

The distance parameter of the virtual site

**get\_openmm\_virtual\_site(*atoms*)**

Returns the OpenMMVirtualSite corresponding to this TrivalentLonePairVirtualSite.

**Parameters**

**atoms** [iterable of int] The indices of the atoms involved in this virtual site (not assumed to be the same as the molecule indices as this method may be accessed with regard to particles in a Topology).

**Returns**

**virtual\_site** [a simtk.openmm LocalCoordinatesSite]

**property atoms**

Atoms on whose position this VirtualSite depends.

**property charge\_increments**

Charges taken from this VirtualSite's atoms and given to the VirtualSite

**property epsilon**

The VdW epsilon term of this VirtualSite

**classmethod from\_bson(*serialized*)**

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_json(*serialized*)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**serialized** [str] A JSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_messagepack**(*serialized*)

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_pickle**(*serialized*)

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_toml**(*serialized*)

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_xml**(*serialized*)

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_yaml**(*serialized*)

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**property molecule**

The Molecule this particle is part of.

**property molecule\_particle\_index**

Returns the index of this particle in its molecule

**property molecule\_virtual\_site\_index**

The index of this VirtualSite within the list of virtual sites within Molecule Note that this can be different from particle\_index.

**property n\_particles**

The number of particles that the virtual site represents

**property name**

The name of this VirtualSite

**property particles**

Particles owned by this VirtualSite

**property rmin\_half**

The VdW rmin\_half term of this VirtualSite

**property sigma**

The VdW sigma term of this VirtualSite

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.**Returns****serialized** [str] A pickled representation of the object**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>**Returns****serialized** [str] A TOML serialized representation of the object**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>**Parameters****indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation**Returns****serialized** [bytes] A MessagePack-encoded bytes serialized representation.**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>**Returns****serialized** [str] A YAML serialized representation of the object**property type**

The type of this VirtualSite (returns the class name as string)

**openforcefield.topology.TopologyAtom****class** openforcefield.topology.**TopologyAtom**(*atom*, *topology\_molecule*)

A TopologyAtom is a lightweight data structure that represents a single openforcefield.topology.molecule.Atom in a Topology. A TopologyAtom consists of two references – One to its fully detailed “atom”, an openforcefield.topology.molecule.Atom, and another to its parent “topology\_molecule”, which occupies a spot in the parent Topology’s TopologyMolecule list.

As some systems can be very large, there is no always-existing representation of a TopologyAtom. They are created on demand as the user requests them.

**Warning:** This API is experimental and subject to change.



## Attributes

- atom** Get the reference Atom for this TopologyAtom.
- atomic\_number** Get the atomic number of this atom
- molecule** Get the reference Molecule that this TopologyAtom belongs to.
- topology\_atom\_index** Get the index of this atom in its parent Topology.
- topology\_bonds** Get the TopologyBonds connected to this TopologyAtom.
- topology\_molecule** Get the TopologyMolecule that this TopologyAtom belongs to.
- topology\_particle\_index** Get the index of this particle in its parent Topology.

## Methods

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

**\_\_init\_\_**(*atom*, *topology\_molecule*)  
Create a new TopologyAtom.

## Parameters

- atom** [An openforcefield.topology.molecule.Atom] The reference atom
- topology\_molecule** [An openforcefield.topology.TopologyMolecule] The TopologyMolecule that this TopologyAtom belongs to

## Methods

<code>__init__(atom, topology_molecule)</code>	Create a new TopologyAtom.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>atom</code>	Get the reference Atom for this TopologyAtom.
<code>atomic_number</code>	Get the atomic number of this atom
<code>molecule</code>	Get the reference Molecule that this TopologyAtom belongs to.
<code>topology_atom_index</code>	Get the index of this atom in its parent Topology.
<code>topology_bonds</code>	Get the TopologyBonds connected to this TopologyAtom.
<code>topology_molecule</code>	Get the TopologyMolecule that this TopologyAtom belongs to.
<code>topology_particle_index</code>	Get the index of this particle in its parent Topology.

### property atom

Get the reference Atom for this TopologyAtom.

### Returns

an `openforcefield.topology.molecule.Atom`

### property atomic\_number

Get the atomic number of this atom

**Returns****int****property topology\_molecule**

Get the TopologyMolecule that this TopologyAtom belongs to.

**Returns****openforcefield.topology.TopologyMolecule****property molecule**

Get the reference Molecule that this TopologyAtom belongs to.

**Returns****openforcefield.topology.molecule.Molecule****property topology\_atom\_index**

Get the index of this atom in its parent Topology.

**Returns****int** The index of this atom in its parent topology.**property topology\_particle\_index**

Get the index of this particle in its parent Topology.

**Returns****int** The index of this atom in its parent topology.**property topology\_bonds**

Get the TopologyBonds connected to this TopologyAtom.

**Returns****iterator of openforcefield.topology.TopologyBonds****to\_dict()**

Convert to dictionary representation.

**classmethod from\_dict(d)**

Static constructor from dictionary representation.

**classmethod from\_bson(serialized)**

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>**Parameters****serialized** [bytes] A BSON serialized representation of the object**Returns****instance** [cls] An instantiated object**classmethod from\_json(serialized)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>**Parameters****serialized** [str] A JSON serialized representation of the object**Returns**

**instance** [cls] An instantiated object

**classmethod from\_messagepack**(*serialized*)

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

**Parameters**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_pickle**(*serialized*)

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters**

**serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_toml**(*serialized*)

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_xml**(*serialized*)

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_yaml**(*serialized*)

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**openforcefield.topology.TopologyBond**

**class** openforcefield.topology.**TopologyBond**(*bond*, *topology\_molecule*)

A TopologyBond is a lightweight data structure that represents a single openforcefield.topology.molecule.Bond in a Topology. A TopologyBond consists of two references – One to its fully detailed “bond”, an openforcefield.topology.molecule.Bond, and another to its parent “topology\_molecule”, which occupies a spot in the parent Topology’s TopologyMolecule list.

As some systems can be very large, there is no always-existing representation of a TopologyBond. They are created on demand as the user requests them.

**Warning:** This API is experimental and subject to change.

**Attributes**

**atoms** Get the TopologyAtoms connected to this TopologyBond.

**bond** Get the reference Bond for this TopologyBond.

**bond\_order** Get the order of this TopologyBond.

**molecule** Get the reference Molecule that this TopologyBond belongs to.

**topology\_bond\_index** Get the index of this bond in its parent Topology.

**topology\_molecule** Get the TopologyMolecule that this TopologyBond belongs to.

**Methods**

<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.

continues on next page

Table 48 – continued from previous page

<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

`__init__(bond, topology_molecule)`

#### Parameters

**bond** [An `openforcefield.topology.molecule.Bond`] The reference bond.

**topology\_molecule** [An `openforcefield.topology.TopologyMolecule`] The TopologyMolecule that this TopologyBond belongs to.

#### Methods

<code>__init__(bond, topology_molecule)</code>	
Parameters	
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

## Attributes

<code>atoms</code>	Get the TopologyAtoms connected to this TopologyBond.
<code>bond</code>	Get the reference Bond for this TopologyBond.
<code>bond_order</code>	Get the order of this TopologyBond.
<code>molecule</code>	Get the reference Molecule that this TopologyBond belongs to.
<code>topology_bond_index</code>	Get the index of this bond in its parent Topology.
<code>topology_molecule</code>	Get the TopologyMolecule that this TopologyBond belongs to.

### property `bond`

Get the reference Bond for this TopologyBond.

#### Returns

an `openforcefield.topology.molecule.Bond`

### property `topology_molecule`

Get the TopologyMolecule that this TopologyBond belongs to.

#### Returns

`openforcefield.topology.TopologyMolecule`

### property `topology_bond_index`

Get the index of this bond in its parent Topology.

#### Returns

`int` The index of this bond in its parent topology.

### property `molecule`

Get the reference Molecule that this TopologyBond belongs to.

#### Returns

`openforcefield.topology.molecule.Molecule`

### property `bond_order`

Get the order of this TopologyBond.

#### Returns

`int` [bond order]

### property `atoms`

Get the TopologyAtoms connected to this TopologyBond.

#### Returns

iterator of `openforcefield.topology.TopologyAtom`

### `to_dict()`

Convert to dictionary representation.

### `classmethod from_dict(d)`

Static constructor from dictionary representation.

### `classmethod from_bson(serialized)`

Instantiate an object from a BSON serialized representation.



Specification: <http://bsonspec.org/>

#### Parameters

**serialized** [bytes] A BSON serialized representation of the object

#### Returns

**instance** [cls] An instantiated object

**classmethod from\_json(serialized)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

#### Parameters

**serialized** [str] A JSON serialized representation of the object

#### Returns

**instance** [cls] An instantiated object

**classmethod from\_messagepack(serialized)**

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

#### Parameters

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

#### Returns

**instance** [cls] Instantiated object.

**classmethod from\_pickle(serialized)**

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

#### Parameters

**serialized** [str] A pickled representation of the object

#### Returns

**instance** [cls] An instantiated object

**classmethod from\_toml(serialized)**

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

#### Parameters

**serialized** [str] A TOML serialized representation of the object

#### Returns

**instance** [cls] An instantiated object

**classmethod** `from_xml(serialized)`

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod** `from_yaml(serialized)`

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object

**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**openforcefield.topology.TopologyVirtualSite**

**class** openforcefield.topology.**TopologyVirtualSite**(*virtual\_site*, *topology\_molecule*)

A TopologyVirtualSite is a lightweight data structure that represents a single openforcefield.topology.molecule.VirtualSite in a Topology. A TopologyVirtualSite consists of two references – One to its fully detailed “VirtualSite”, an openforcefield.topology.molecule.VirtualSite, and another to its parent “topology\_molecule”, which occupies a spot in the parent Topology’s TopologyMolecule list.

As some systems can be very large, there is no always-existing representation of a TopologyVirtualSite. They are created on demand as the user requests them.

**Warning:** This API is experimental and subject to change.

**Attributes**

**atoms** Get the TopologyAtoms involved in this TopologyVirtualSite.

**molecule** Get the reference Molecule that this TopologyVirtualSite belongs to.

**n\_particles** Get the number of particles represented by this VirtualSite

**particles** Get an iterator to the reference particles that this TopologyVirtualSite contains.

**topology\_molecule** Get the TopologyMolecule that this TopologyVirtualSite belongs to.

**topology\_virtual\_particle\_start\_index** Get the index of the first virtual site particle in its parent Topology.

**topology\_virtual\_site\_index** Get the index of this virtual site in its parent Topology.

**type** Get the type of this virtual site

**virtual\_site** Get the reference VirtualSite for this TopologyVirtualSite.

## Methods

<code>atom(index)</code>	Get the atom at a specific index in this TopologyVirtualSite
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	Static constructor from dictionary representation.
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	Convert to dictionary representation.
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

<code>invalidate_cached_data</code>	
-------------------------------------	--

`__init__(virtual_site, topology_molecule)`

### Parameters

**virtual\_site** [An openforcefield.topology.molecule.VirtualSite] The reference virtual site

**topology\_molecule** [An openforcefield.topology.TopologyMolecule] The Topology-Molecule that this TopologyVirtualSite belongs to

## Methods

__init__(virtual_site, topology_molecule)	
	Parameters
atom(index)	Get the atom at a specific index in this TopologyVirtualSite
from_bson(serialized)	Instantiate an object from a BSON serialized representation.
from_dict(d)	Static constructor from dictionary representation.
from_json(serialized)	Instantiate an object from a JSON serialized representation.
from_messagepack(serialized)	Instantiate an object from a MessagePack serialized representation.
from_pickle(serialized)	Instantiate an object from a pickle serialized representation.
from_toml(serialized)	Instantiate an object from a TOML serialized representation.
from_xml(serialized)	Instantiate an object from an XML serialized representation.
from_yaml(serialized)	Instantiate from a YAML serialized representation.
invalidate_cached_data()	
to_bson()	Return a BSON serialized representation.
to_dict()	Convert to dictionary representation.
to_json([indent])	Return a JSON serialized representation.
to_messagepack()	Return a MessagePack representation.
to_pickle()	Return a pickle serialized representation.
to_toml()	Return a TOML serialized representation.
to_xml([indent])	Return an XML representation.
to_yaml()	Return a YAML serialized representation.

## Attributes

atoms	Get the TopologyAtoms involved in this TopologyVirtualSite.
molecule	Get the reference Molecule that this TopologyVirtualSite belongs to.
n_particles	Get the number of particles represented by this VirtualSite
particles	Get an iterator to the reference particles that this TopologyVirtualSite contains.
topology_molecule	Get the TopologyMolecule that this TopologyVirtualSite belongs to.
topology_virtual_particle_start_index	Get the index of the first virtual site particle in its parent Topology.
topology_virtual_site_index	Get the index of this virtual site in its parent Topology.

continues on next page

Table 53 – continued from previous page

<code>type</code>	Get the type of this virtual site
<code>virtual_site</code>	Get the reference VirtualSite for this TopologyVirtualSite.

**atom(*index*)**

Get the atom at a specific index in this TopologyVirtualSite

**Parameters**

**index** [int] The index of the atom in the reference VirtualSite to retrieve

**Returns**

**TopologyAtom**

**property atoms**

Get the TopologyAtoms involved in this TopologyVirtualSite.

**Returns**

**iterator of openforcefield.topology.TopologyAtom**

**property virtual\_site**

Get the reference VirtualSite for this TopologyVirtualSite.

**Returns**

**an openforcefield.topology.molecule.VirtualSite**

**property topology\_molecule**

Get the TopologyMolecule that this TopologyVirtualSite belongs to.

**Returns**

**openforcefield.topology.TopologyMolecule**

**property topology\_virtual\_site\_index**

Get the index of this virtual site in its parent Topology.

**Returns**

**int** The index of this virtual site in its parent topology.

**property n\_particles**

Get the number of particles represented by this VirtualSite

**Returns**

**int** [The number of particles]

**property topology\_virtual\_particle\_start\_index**

Get the index of the first virtual site particle in its parent Topology.

**Returns**

**int** The index of this particle in its parent topology.

**property particles**

Get an iterator to the reference particles that this TopologyVirtualSite contains.

**Returns**

**iterator of TopologyVirtualParticles**

**property molecule**

Get the reference Molecule that this TopologyVirtualSite belongs to.

**Returns****openforcefield.topology.molecule.Molecule****property type**

Get the type of this virtual site

**Returns****str** [The class name of this virtual site]**to\_dict()**

Convert to dictionary representation.

**classmethod from\_dict(d)**

Static constructor from dictionary representation.

**classmethod from\_bson(serialized)**

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>**Parameters****serialized** [bytes] A BSON serialized representation of the object**Returns****instance** [cls] An instantiated object**classmethod from\_json(serialized)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>**Parameters****serialized** [str] A JSON serialized representation of the object**Returns****instance** [cls] An instantiated object**classmethod from\_messagepack(serialized)**

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>**Parameters****serialized** [bytes] A MessagePack-encoded bytes serialized representation**Returns****instance** [cls] Instantiated object.**classmethod from\_pickle(serialized)**

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Parameters****serialized** [str] A pickled representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_toml(serialized)**

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**classmethod from\_xml(serialized)**

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**serialized** [bytes] An XML serialized representation

**Returns**

**instance** [cls] Instantiated object.

**classmethod from\_yaml(serialized)**

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

**Parameters**

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [str] A JSON serialized representation of the object



**to\_messagepack()**

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**to\_pickle()**

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

**Returns**

**serialized** [str] A pickled representation of the object

**to\_toml()**

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**to\_xml(indent=2)**

Return an XML representation.

Specification: <https://www.w3.org/XML/>

**Parameters**

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**to\_yaml()**

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**openforcefield.topology.ValenceDict**

**class** openforcefield.topology.**ValenceDict**(\*args, \*\*kwargs)  
Enforce uniqueness in atom indices.

**Methods**

<code>clear()</code>	
<code>get(k[,d])</code>	
<code>index_of(key[, possible])</code>	Generates a canonical ordering of the equivalent permutations of key (equivalent rearrangements of indices) and identifies which of those possible orderings this particular ordering is.
<code>items()</code>	
<code>key_transform(key)</code>	Reverse tuple if first element is larger than last element.
<code>keys()</code>	
<code>pop(k[,d])</code>	If key is not found, d is returned if given, otherwise KeyError is raised.
<code>popitem()</code>	as a 2-tuple; but raise KeyError if D is empty.
<code>setdefault(k[,d])</code>	
<code>update([E, ]**F)</code>	If E present and has a .keys() method, does: for k in E: D[k] = E[k] If E present and lacks .keys() method, does: for (k, v) in E: D[k] = v In either case, this is followed by: for k, v in F.items(): D[k] = v
<code>values()</code>	

**\_\_init\_\_**(\*args, \*\*kwargs)  
Initialize self. See help(type(self)) for accurate signature.

**Methods**

<b>__init__</b> (*args, **kwargs)	Initialize self.
<code>clear()</code>	
<code>get(k[,d])</code>	
<code>index_of(key[, possible])</code>	Generates a canonical ordering of the equivalent permutations of key (equivalent rearrangements of indices) and identifies which of those possible orderings this particular ordering is.
<code>items()</code>	
<code>key_transform(key)</code>	Reverse tuple if first element is larger than last element.
<code>keys()</code>	
<code>pop(k[,d])</code>	If key is not found, d is returned if given, otherwise KeyError is raised.
<code>popitem()</code>	as a 2-tuple; but raise KeyError if D is empty.
<code>setdefault(k[,d])</code>	

continues on next page

Table 55 – continued from previous page

<code>update([E, ]**F)</code>	If E present and has a <code>.keys()</code> method, does: for k in E: <code>D[k] = E[k]</code> If E present and lacks <code>.keys()</code> method, does: for (k, v) in E: <code>D[k] = v</code> In either case, this is followed by: for k, v in <code>F.items()</code> : <code>D[k] = v</code>
<code>values()</code>	

**static** `key_transform(key)`

Reverse tuple if first element is larger than last element.

**static** `index_of(key, possible=None)`

Generates a canonical ordering of the equivalent permutations of key (equivalent rearrangements of indices) and identifies which of those possible orderings this particular ordering is. This method is useful when multiple SMARTS patterns might match the same atoms, but local molecular symmetry or the use of wildcards in the SMARTS could make the matches occur in arbitrary order.

This method can be restricted to a subset of the canonical orderings, by providing the optional possible keyword argument. If provided, the index returned by this method will be the index of the element in possible after undergoing the same canonical sorting as above.

#### Parameters

**key** [iterable of int] A valid key for ValenceDict

**possible** [iterable of iterable of int, optional. default=`None`] A subset of the possible orderings that this match might take.

#### Returns

**index** [int]

**clear()** → None. Remove all items from D.

**get(k[, d])** → `D[k]` if k in D, else d. d defaults to None.

**items()** → a set-like object providing a view on D's items

**keys()** → a set-like object providing a view on D's keys

**pop(k[, d])** → v, remove specified key and return the corresponding value.  
If key is not found, d is returned if given, otherwise `KeyError` is raised.

**popitem()** → (k, v), remove and return some (key, value) pair  
as a 2-tuple; but raise `KeyError` if D is empty.

**setdefault(k[, d])** → `D.get(k, d)`, also set `D[k]=d` if k not in D

**update([E], \*\*F)** → None. Update D from mapping/iterable E and F.

If E present and has a `.keys()` method, does: for k in E: `D[k] = E[k]` If E present and lacks `.keys()` method, does: for (k, v) in E: `D[k] = v` In either case, this is followed by: for k, v in `F.items()`: `D[k] = v`

**values()** → an object providing a view on D's values

**openforcefield.topology.ImproperDict**

**class** openforcefield.topology.**ImproperDict**(\*args, \*\*kwargs)  
Symmetrize improper torsions.

**Methods**

<code>clear()</code>	
<code>get(k[,d])</code>	
<code>index_of(key[, possible])</code>	Generates a canonical ordering of the equivalent permutations of key (equivalent rearrangements of indices) and identifies which of those possible orderings this particular ordering is.
<code>items()</code>	
<code>key_transform(key)</code>	Reorder tuple in numerical order except for element[1] which is the central atom; it retains its position.
<code>keys()</code>	
<code>pop(k[,d])</code>	If key is not found, d is returned if given, otherwise KeyError is raised.
<code>popitem()</code>	as a 2-tuple; but raise KeyError if D is empty.
<code>setdefault(k[,d])</code>	
<code>update([E, ]**F)</code>	If E present and has a .keys() method, does: for k in E: D[k] = E[k] If E present and lacks .keys() method, does: for (k, v) in E: D[k] = v In either case, this is followed by: for k, v in F.items(): D[k] = v
<code>values()</code>	

**\_\_init\_\_**(\*args, \*\*kwargs)  
Initialize self. See help(type(self)) for accurate signature.

**Methods**

<b>__init__</b> (*args, **kwargs)	Initialize self.
<code>clear()</code>	
<code>get(k[,d])</code>	
<code>index_of(key[, possible])</code>	Generates a canonical ordering of the equivalent permutations of key (equivalent rearrangements of indices) and identifies which of those possible orderings this particular ordering is.
<code>items()</code>	
<code>key_transform(key)</code>	Reorder tuple in numerical order except for element[1] which is the central atom; it retains its position.
<code>keys()</code>	
<code>pop(k[,d])</code>	If key is not found, d is returned if given, otherwise KeyError is raised.
<code>popitem()</code>	as a 2-tuple; but raise KeyError if D is empty.

continues on next page

Table 57 – continued from previous page

<code>setdefault(k[,d])</code>	
<code>update([E, ]**F)</code>	If E present and has a <code>.keys()</code> method, does: for k in E: <code>D[k] = E[k]</code> If E present and lacks <code>.keys()</code> method, does: for (k, v) in E: <code>D[k] = v</code> In either case, this is followed by: for k, v in <code>F.items()</code> : <code>D[k] = v</code>
<code>values()</code>	

**static** `key_transform(key)`

Reorder tuple in numerical order except for element[1] which is the central atom; it retains its position.

**static** `index_of(key, possible=None)`

Generates a canonical ordering of the equivalent permutations of key (equivalent rearrangements of indices) and identifies which of those possible orderings this particular ordering is. This method is useful when multiple SMARTS patterns might match the same atoms, but local molecular symmetry or the use of wildcards in the SMARTS could make the matches occur in arbitrary order.

This method can be restricted to a subset of the canonical orderings, by providing the optional possible keyword argument. If provided, the index returned by this method will be the index of the element in possible after undergoing the same canonical sorting as above.

#### Parameters

**key** [iterable of int] A valid key for ValenceDict

**possible** [iterable of iterable of int, optional. default=`None`] A subset of the possible orderings that this match might take.

#### Returns

**index** [int]

`clear()` → None. Remove all items from D.

`get(k[, d])` → `D[k]` if k in D, else d. d defaults to None.

`items()` → a set-like object providing a view on D's items

`keys()` → a set-like object providing a view on D's keys

`pop(k[, d])` → v, remove specified key and return the corresponding value.  
If key is not found, d is returned if given, otherwise `KeyError` is raised.

`popitem()` → (k, v), remove and return some (key, value) pair  
as a 2-tuple; but raise `KeyError` if D is empty.

`setdefault(k[, d])` → `D.get(k,d)`, also set `D[k]=d` if k not in D

`update([E], **F)` → None. Update D from mapping/iterable E and F.

If E present and has a `.keys()` method, does: for k in E: `D[k] = E[k]` If E present and lacks `.keys()` method, does: for (k, v) in E: `D[k] = v` In either case, this is followed by: for k, v in `F.items()`: `D[k] = v`

`values()` → an object providing a view on D's values

## 2.2 Forcefield typing tools

### 2.2.1 Chemical environments

Tools for representing and operating on chemical environments

<code>ChemicalEnvironment</code>	Chemical environment abstract base class used for validating SMIRKS
----------------------------------	---

#### `openforcefield.typing.chemistry.ChemicalEnvironment`

```
class openforcefield.typing.chemistry.ChemicalEnvironment(smirks=None, label=None,
                                                         validate_parsable=True, validate_valence_type=True,
                                                         toolkit_registry=None)
```

Chemical environment abstract base class used for validating SMIRKS

#### Methods

<code>get_type([toolkit_registry])</code>	Return the valence type implied by the connectivity of the bound atoms in this ChemicalEnvironment.
<code>validate([validate_valence_type, ...])</code>	Returns True if the underlying smirks is the correct valence type, False otherwise.
<code>validate_smirks(smirks[, validate_parsable, ...])</code>	Check the provided SMIRKS string is valid, and if requested, tags atoms appropriate to the specified valence type.

```
__init__(smirks=None, label=None, validate_parsable=True, validate_valence_type=True,
         toolkit_registry=None)
```

Initialize a chemical environment abstract base class.

**smirks = string, optional** if smirks is not None, a chemical environment is built from the provided SMIRKS string

**label = anything, optional** intended to be used to label this chemical environment could be a string, int, or float, or anything

**validate\_parsable: bool, optional, default=True** If specified, ensure the provided smirks is parsable

**validate\_valence\_type [bool, optional, default=True]** If specified, ensure the tagged atoms are appropriate to the specified valence type

**toolkit\_registry = string or ToolkitWrapper or ToolkitRegistry. Default = None** Either a ToolkitRegistry, ToolkitWrapper, or the strings 'openeye' or 'rdkit', indicating the backend to use for validating the correct connectivity of the SMIRKS during initialization. If None, this function will use the GLOBAL\_TOOLKIT\_REGISTRY

#### Raises

**SMIRKSParsingError** if smirks was unparsable

**SMIRKSMismatchError** if smirks did not have expected connectivity between tagged atoms and `validate_valence_type=True`

## Methods

<code>__init__([smirks, label, validate_parsable, ...])</code>	Initialize a chemical environment abstract base class.
<code>get_type([toolkit_registry])</code>	Return the valence type implied by the connectivity of the bound atoms in this ChemicalEnvironment.
<code>validate([validate_valence_type, ...])</code>	Returns True if the underlying smirks is the correct valence type, False otherwise.
<code>validate_smirks(smirks[, validate_parsable, ...])</code>	Check the provided SMIRKS string is valid, and if requested, tags atoms appropriate to the specified valence type.

**validate**(*validate\_valence\_type=True, toolkit\_registry=None*)

Returns True if the underlying smirks is the correct valence type, False otherwise. If the expected type is None, this method always returns True.

**validate\_valence\_type** [bool, optional, default=True] If specified, ensure the tagged atoms are appropriate to the specified valence type

**toolkit\_registry = ToolkitWrapper or ToolkitRegistry. Default = None** Either a ToolkitRegistry or ToolkitWrapper, indicating the backend to use for validating the correct connectivity of the SMIRKS during initialization. If None, this function will use the GLOBAL\_TOOLKIT\_REGISTRY

## Raises

**SMIRKSParsingError** if smirks was unparsable

**SMIRKSMismatchError** if smirks did not have expected connectivity between tagged atoms and `validate_valence_type=True`

**classmethod validate\_smirks**(*smirks, validate\_parsable=True, validate\_valence\_type=True, toolkit\_registry=None*)

Check the provided SMIRKS string is valid, and if requested, tags atoms appropriate to the specified valence type.

## Parameters

**smirks** [str] The SMIRKS expression to validate

**validate\_parsable: bool, optional, default=True** If specified, ensure the provided smirks is parsable

**validate\_valence\_type** [bool, optional, default=True] If specified, ensure the tagged atoms are appropriate to the specified valence type

**toolkit\_registry = string or ToolkitWrapper or ToolkitRegistry. Default = None** Either a ToolkitRegistry, ToolkitWrapper, or the strings 'openeye' or 'rdkit', indicating the backend to use for validating the correct connectivity of the SMIRKS during initialization. If None, this function will use the GLOBAL\_TOOLKIT\_REGISTRY

## Raises

**SMIRKSParsingError** if smirks was unparsable

**SMIRKSMismatchError** if smirks did not have expected connectivity between tagged atoms and `validate_valence_type=True`

**get\_type**(*toolkit\_registry=None*)

Return the valence type implied by the connectivity of the bound atoms in this ChemicalEnvironment.

#### Parameters

**toolkit\_registry** [openforcefield.utils.ToolkitRegistry or openforcefield.utils.ToolkitWrapper] The cheminformatics toolkit to use for parsing the smirks

#### Returns

**valence\_type** [str] One of “Atom”, “Bond”, “Angle”, “ProperTorsion”, “ImproperTorsion”, or None. If tagged atoms are not connected in a known pattern this method will return None.

#### Raises

**SMIRKSParsingError** if smirks was unparsable

## 2.2.2 Forcefield typing engines

Engines for applying parameters to chemical systems

### The SMIRks-Native Open Force Field (SMIRNOFF)

A reference implementation of the SMIRNOFF specification for parameterizing biomolecular systems

#### ForceField

The ForceField class is a primary part of the top-level toolkit API. ForceField objects are initialized from SMIRNOFF data sources (e.g. an OFFXML file). For a basic example of system creation using a ForceField, see `examples/SMIRNOFF_simulation`.

<code>ForceField</code>	A factory that assigns SMIRNOFF parameters to a molecular system
<code>get_available_force_fields</code>	Get the filenames of all available .offxml force field files.



**openforcefield.typing.engines.smirnoff.forcefield.ForceField**

```
class openforcefield.typing.engines.smirnoff.forcefield.ForceField(*sources, aromatic-
    ity_model='OEArModel_MDL',
    param-
    eter_handler_classes=None,
    param-
    eter_io_handler_classes=None,
    dis-
    able_version_check=False,
    al-
    low_cosmetic_attributes=False,
    load_plugins=False)
```

A factory that assigns SMIRNOFF parameters to a molecular system

`ForceField` is a factory that constructs an OpenMM `simtk.openmm.System` object from a `openforcefield.topology.Topology` object defining a (bio)molecular system containing one or more molecules.

When a `ForceField` object is created from one or more specified SMIRNOFF serialized representations, all `ParameterHandler` subclasses currently imported are identified and registered to handle different sections of the SMIRNOFF force field definition file(s).

All `ParameterIOHandler` subclasses currently imported are identified and registered to handle different serialization formats (such as XML).

The force field definition is processed by these handlers to populate the `ForceField` object model data structures that can easily be manipulated via the API:

Processing a `Topology` object defining a chemical system will then call all `:class`ParameterHandler`` objects in an order guaranteed to satisfy the declared processing order constraints of each `:class`ParameterHandler``.

**Examples**

Create a new `ForceField` containing the `smirnoff99Frosst` parameter set:

```
>>> from openforcefield.typing.engines.smirnoff import ForceField
>>> forcefield = ForceField('test_forcefields/smirnoff99Frosst.offxml')
```

Create an OpenMM system from a `openforcefield.topology.Topology` object:

```
>>> from openforcefield.topology import Molecule, Topology
>>> ethanol = Molecule.from_smiles('CCO')
>>> topology = Topology.from_molecules(molecules=[ethanol])
>>> system = forcefield.create_openmm_system(topology)
```

Modify the long-range electrostatics method:

```
>>> forcefield.get_parameter_handler('Electrostatics').method = 'PME'
```

Inspect the first few vdW parameters:

```
>>> low_precedence_parameters = forcefield.get_parameter_handler('vdW').parameters[0:3]
```

Retrieve the vdW parameters by SMIRKS string and manipulate it:

```
>>> parameter = forcefield.get_parameter_handler('vdW').parameters['[#1:1]-[#7]']
>>> parameter.rmin_half += 0.1 * unit.angstroms
>>> parameter.epsilon *= 1.02
```

Make a child vdW type more specific (checking modified SMIRKS for validity):

```
>>> forcefield.get_parameter_handler('vdW').parameters[-1].smirks += '~[#53]'
```

**Warning:** While we check whether the modified SMIRKS is still valid and has the appropriate valence type, we currently don't check whether the typing remains hierarchical, which could result in some types no longer being assignable because more general types now come *below* them and preferentially match.

Delete a parameter:

```
>>> del forcefield.get_parameter_handler('vdW').parameters['[#1:1]-[#6X4]']
```

Insert a parameter at a specific point in the parameter tree:

```
>>> from openforcefield.typing.engines.smirnoff import vdWHandler
>>> new_parameter = vdWHandler.vdWType(smirks='[*:1]', epsilon=0.0157*unit.kilocalories_per_mole,
↳ rmin_half=0.6000*unit.angstroms)
>>> forcefield.get_parameter_handler('vdW').parameters.insert(0, new_parameter)
```

**Warning:** We currently don't check whether removing a parameter could accidentally remove the root type, so it's possible to no longer type all molecules this way.

## Attributes

**parameters** [dict of str] `parameters[tagname]` is the instantiated `ParameterHandler` class that handles parameters associated with the force tagname. This is the primary means of retrieving and modifying parameters, such as `parameters['vdW'][0].sigma *= 1.1`

**parameter\_object\_handlers** [dict of str] Registered list of `ParameterHandler` classes that will handle different forcefield tags to create the parameter object model. `parameter_object_handlers[tagname]` is the `ParameterHandler` that will be instantiated to process the force field definition section tagname. `ParameterHandler` classes are registered when the `ForceField` object is created, but can be manipulated afterwards.

**parameter\_io\_handlers** [dict of str] Registered list of `ParameterIOHandler` classes that will handle serializing/deserializing the parameter object model to string or file representations, such as XML. `parameter_io_handlers[iotype]` is the `ParameterHandler` that will be instantiated to process the serialization scheme iotype. `ParameterIOHandler` classes are registered when the `ForceField` object is created, but can be manipulated afterwards.

## Methods

<code>create_openmm_system(topology, **kwargs)</code>	Create an OpenMM System representing the interactions for the specified Topology with the current force field
<code>create_parmed_structure(topology, positions, ...)</code>	Create a ParmEd Structure object representing the interactions for the specified Topology with the current force field
<code>get_parameter_handler(tagname[, ...])</code>	Retrieve the parameter handlers associated with the provided tagname.
<code>get_parameter_io_handler(io_format)</code>	Retrieve the parameter handlers associated with the provided tagname.
<code>label_molecules(topology)</code>	Return labels for a list of molecules corresponding to parameters from this force field.
<code>parse_smirnoff_from_source(source)</code>	Reads a SMIRNOFF data structure from a source, which can be one of many types.
<code>parse_sources(sources[, ...])</code>	Parse a SMIRNOFF force field definition.
<code>register_parameter_handler(parameter_handler)</code>	Register a new ParameterHandler for a specific tag, making it available for lookup in the ForceField.
<code>register_parameter_io_handler(...)</code>	Register a new ParameterIOHandler, making it available for lookup in the ForceField.
<code>to_file(filename[, io_format, ...])</code>	Write this Forcefield and all its associated parameters to a string in a given format which complies with the SMIRNOFF spec.
<code>to_string([io_format, ...])</code>	Write this Forcefield and all its associated parameters to a string in a given format which complies with the SMIRNOFF spec.

`__init__(*sources, aromaticity_model='OEAroModel_MDL', parameter_handler_classes=None, parameter_io_handler_classes=None, disable_version_check=False, allow_cosmetic_attributes=False, load_plugins=False)`

Create a new `ForceField` object from one or more SMIRNOFF parameter definition files.

## Parameters

**sources** [string or file-like object or open file handle or URL (or iterable of these)]

A list of files defining the SMIRNOFF force field to be loaded. Currently, only the [SMIRNOFF XML format](#) is supported. Each entry may be an absolute file path, a path relative to the current working directory, a path relative to this module's data subdirectory (for built in force fields), or an open file-like object with a `read()` method from which the forcefield XML data can be loaded. If multiple files are specified, any top-level tags that are repeated will be merged if they are compatible, with files appearing later in the sequence resulting in parameters that have higher precedence. Support for multiple files is primarily intended to allow solvent parameters to be specified by listing them last in the sequence.

**aromaticity\_model** [string, default='OEAroModel\_MDL'] The aromaticity model used by the force field. Currently, only 'OEAroModel\_MDL' is supported

**parameter\_handler\_classes** [iterable of ParameterHandler classes, optional, default=None] If not None, the specified set of ParameterHandler classes will be instantiated to create the parameter object model. By default, all imported subclasses of ParameterHandler are automatically registered.

**parameter\_io\_handler\_classes** [iterable of ParameterIOHandler classes] If not None, the specified set of ParameterIOHandler classes will be used to parse/generate serialized parameter sets. By default, all imported subclasses of ParameterIOHandler are automatically registered.

**disable\_version\_check** [bool, optional, default=False] If True, will disable checks against the current highest supported forcefield version. This option is primarily intended for forcefield development.

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to retain non-spec kwargs from data sources.

**load\_plugins: bool, optional. Default = False** Whether to load ParameterHandler classes which have been registered by installed plugins.

## Examples

Load one SMIRNOFF parameter set in XML format (searching the package data directory by default, which includes some standard parameter sets):

```
>>> forcefield = ForceField('test_forcefields/smirnoff99Frosst.offxml')
```

Load multiple SMIRNOFF parameter sets:

```
forcefield = ForceField('test_forcefields/smirnoff99Frosst.offxml', 'test_forcefields/tip3p.offxml')
```

Load a parameter set from a string:

```
>>> offxml = '<SMIRNOFF version="0.2" aromaticity_model="OEAroModel_MDL"/>'
>>> forcefield = ForceField(offxml)
```

## Methods

<code>__init__(*sources[, aromaticity_model, ...])</code>	Create a new <code>ForceField</code> object from one or more SMIRNOFF parameter definition files.
<code>create_openmm_system(topology, **kwargs)</code>	Create an OpenMM System representing the interactions for the specified Topology with the current force field
<code>create_parmed_structure(topology, positions, ...)</code>	Create a ParmEd Structure object representing the interactions for the specified Topology with the current force field
<code>get_parameter_handler(tagname[, ...])</code>	Retrieve the parameter handlers associated with the provided tagname.
<code>get_parameter_io_handler(io_format)</code>	Retrieve the parameter handlers associated with the provided tagname.
<code>label_molecules(topology)</code>	Return labels for a list of molecules corresponding to parameters from this force field.
<code>parse_smirnoff_from_source(source)</code>	Reads a SMIRNOFF data structure from a source, which can be one of many types.
<code>parse_sources(sources[, ...])</code>	Parse a SMIRNOFF force field definition.
<code>register_parameter_handler(parameter_handler)</code>	Register a new ParameterHandler for a specific tag, making it available for lookup in the ForceField.

continues on next page

Table 63 – continued from previous page

<code>register_parameter_io_handler(...)</code>	Register a new ParameterIOHandler, making it available for lookup in the ForceField.
<code>to_file(filename[, io_format, ...])</code>	Write this Forcefield and all its associated parameters to a string in a given format which complies with the SMIRNOFF spec.
<code>to_string([io_format, ...])</code>	Write this Forcefield and all its associated parameters to a string in a given format which complies with the SMIRNOFF spec.

### Attributes

<code>aromaticity_model</code>	Returns the aromaticity model for this ForceField object.
<code>author</code>	Returns the author data for this ForceField object.
<code>date</code>	Returns the date data for this ForceField object.
<code>registered_parameter_handlers</code>	Return the list of registered parameter handlers by name

#### property `aromaticity_model`

Returns the aromaticity model for this ForceField object.

#### Returns

**`aromaticity_model`** The aromaticity model for this force field.

#### property `author`

Returns the author data for this ForceField object. If not defined in any loaded files, this will be None.

#### Returns

**`author`** [str] The author data for this forcefield.

#### property `date`

Returns the date data for this ForceField object. If not defined in any loaded files, this will be None.

#### Returns

**`date`** [str] The date data for this forcefield.

#### `register_parameter_handler(parameter_handler)`

Register a new ParameterHandler for a specific tag, making it available for lookup in the ForceField.

**Warning:** This API is experimental and subject to change.

### Parameters

**`parameter_handler`** [A ParameterHandler object] The ParameterHandler to register. The TAGNAME attribute of this object will be used as the key for registration.

**register\_parameter\_io\_handler**(*parameter\_io\_handler*)

Register a new ParameterIOHandler, making it available for lookup in the ForceField.

**Warning:** This API is experimental and subject to change.

#### Parameters

**parameter\_io\_handler** [A ParameterIOHandler object] The ParameterIOHandler to register. The FORMAT attribute of this object will be used to associate it to a file format/suffix.

**property registered\_parameter\_handlers**

Return the list of registered parameter handlers by name

**Warning:** This API is experimental and subject to change.

#### Returns

**registered\_parameter\_handlers:** iterable of names of ParameterHandler objects in this ForceField

**get\_parameter\_handler**(*tagname*, *handler\_kwargs*=None, *allow\_cosmetic\_attributes*=False)

Retrieve the parameter handlers associated with the provided tagname.

If the parameter handler has not yet been instantiated, it will be created and returned. If a parameter handler object already exists, it will be checked for compatibility and an Exception raised if it is incompatible with the provided kwargs. If compatible, the existing ParameterHandler will be returned.

#### Parameters

**tagname** [str] The name of the parameter to be handled.

**handler\_kwargs** [dict, optional. Default = None] Dict to be passed to the handler for construction or checking compatibility. If this is None and no existing ParameterHandler exists for the desired tag, a handler will be initialized with all default values. If this is None and a handler for the desired tag exists, the existing ParameterHandler will be returned.

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs in smirnoff\_data.

#### Returns

**handler** [An openforcefield.engines.typing.smirnoff.ParameterHandler]

#### Raises

**KeyError** if there is no ParameterHandler for the given tagname

**get\_parameter\_io\_handler**(*io\_format*)

Retrieve the parameter handlers associated with the provided tagname. If the parameter IO handler has not yet been instantiated, it will be created.

#### Parameters

**io\_format** [str] The name of the io format to be handled.

**Returns**

**io\_handler** [An openforcefield.engines.typing.smirnoff.ParameterIOHandler]

**Raises**

**KeyError** if there is no ParameterIOHandler for the given tagname

**parse\_sources**(*sources*, *allow\_cosmetic\_attributes=True*)

Parse a SMIRNOFF force field definition.

**Parameters**

**sources** [string or file-like object or open file handle or URL (or iterable of these)]

A list of files defining the SMIRNOFF force field to be loaded. Currently, only the [SMIRNOFF XML format](#) is supported. Each entry may be an absolute file path, a path relative to the current working directory, a path relative to this module's data subdirectory (for built in force fields), or an open file-like object with a `read()` method from which the forcefield XML data can be loaded. If multiple files are specified, any top-level tags that are repeated will be merged if they are compatible, with files appearing later in the sequence resulting in parameters that have higher precedence. Support for multiple files is primarily intended to allow solvent parameters to be specified by listing them last in the sequence.

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs present in the source.

**.. notes ::**

- New SMIRNOFF sections are handled independently, as if they were specified in the same file.
- If a SMIRNOFF section that has already been read appears again, its definitions are appended to the end of the previously-read definitions if the sections are configured with compatible attributes; otherwise, an `IncompatibleTagException` is raised.

**parse\_smirnoff\_from\_source**(*source*)

Reads a SMIRNOFF data structure from a source, which can be one of many types.

**Parameters**

**source** [str or bytes] *sources* : string or file-like object or open file handle or URL (or iterable of these) A list of files defining the SMIRNOFF force field to be loaded. Currently, only the [SMIRNOFF XML format](#) is supported. Each entry may be an absolute file path, a path relative to the current working directory, a path relative to this module's data subdirectory (for built in force fields), or an open file-like object with a `read()` method from which the forcefield XML data can be loaded.

**Returns**

**smirnoff\_data** [OrderedDict] A representation of a SMIRNOFF-format data structure. Begins at top-level 'SMIRNOFF' key.

**to\_string**(*io\_format='XML'*, *discard\_cosmetic\_attributes=False*)

Write this Forcefield and all its associated parameters to a string in a given format which complies with the SMIRNOFF spec.

**Parameters**

**io\_format** [str or ParameterIOHandler, optional. Default='XML'] The serialization format to write to

**discard\_cosmetic\_attributes** [bool, default=False] Whether to discard any non-spec attributes stored in the ForceField.

#### Returns

**forcefield\_string** [str] The string representation of the serialized forcefield

**to\_file**(filename, io\_format=None, discard\_cosmetic\_attributes=False)

Write this Forcefield and all its associated parameters to a string in a given format which complies with the SMIRNOFF spec.

#### Parameters

**filename** [str] The filename to write to

**io\_format** [str or ParameterIOHandler, optional. Default=None] The serialization format to write out. If None, will attempt to be inferred from the filename.

**discard\_cosmetic\_attributes** [bool, default=False] Whether to discard any non-spec attributes stored in the ForceField.

#### Returns

**forcefield\_string** [str] The string representation of the serialized forcefield

**create\_openmm\_system**(topology, \*\*kwargs)

Create an OpenMM System representing the interactions for the specified Topology with the current force field

#### Parameters

**topology** [openforcefield.topology.Topology] The Topology corresponding to the system to be parameterized

**charge\_from\_molecules** [List[openforcefield.molecule.Molecule], optional. default = []] If specified, partial charges will be taken from the given molecules instead of being determined by the force field.

**partial\_bond\_orders\_from\_molecules** [List[openforcefield.molecule.Molecule], optional. default = []] If specified, partial bond orders will be taken from the given molecules instead of being determined by the force field. **All** bonds on each molecule given must have `fractional_bond_order` specified. A *ValueError* will be raised if any bonds have `fractional_bond_order=None`. Molecules in the topology not represented in this list will have fractional bond orders calculated using underlying toolkits as needed.

**return\_topology** [bool, optional. default=False] If True, return tuple of (system, topology), where topology is the processed topology. Default False. This topology will have the final partial charges assigned on its `reference_molecules` attribute, as well as partial bond orders (if they were calculated).

#### Returns

**system** [simtk.openmm.System] The newly created OpenMM System corresponding to the specified topology

**topology** [openforcefield.topology.Topology, optional.] If the *return\_topology* keyword argument is used, this method will also return a Topology. This can be used to inspect the partial charges and partial bond orders assigned to the molecules during parameterization.



**create\_parmed\_structure**(*topology*, *positions*, *\*\*kwargs*)

Create a ParmEd Structure object representing the interactions for the specified Topology with the current force field

This method creates a [ParmEd](#) Structure object containing a topology, positions, and parameters.

#### Parameters

**topology** [`openforcefield.topology.Topology`] The Topology corresponding to the System object to be created.

**positions** [`simtk.unit.Quantity` of dimension (natoms,3) with units compatible with angstroms] The positions corresponding to the System object to be created

#### Returns

**structure** [`parmed.Structure`] The newly created `parmed.Structure` object

**label\_molecules**(*topology*)

Return labels for a list of molecules corresponding to parameters from this force field. For each molecule, a dictionary of force types is returned, and for each force type, each force term is provided with the atoms involved, the parameter id assigned, and the corresponding SMIRKS.

#### Parameters

**topology** [`openforcefield.topology.Topology`] A Topology object containing one or more unique molecules to be labeled

#### Returns

**molecule\_labels** [list] List of labels for unique molecules. Each entry in the list corresponds to one unique molecule in the Topology and is a dictionary keyed by force type, i.e., `molecule_labels[0]['HarmonicBondForce']` gives details for the harmonic bond parameters for the first molecule. Each element is a list of the form: [ ( [ atom1, ..., atomN], parameter\_id, SMIRKS), ... ].

## openforcefield.typing.engines.smirnoff.forcefield.get\_available\_force\_fields

`openforcefield.typing.engines.smirnoff.forcefield.get_available_force_fields(full_paths=False)`

Get the filenames of all available .offxml force field files.

Availability is determined by what is discovered through the

`openforcefield.smirnoff_forcefield_directory` entry point. If the `openforcefields` package is installed, this should include several .offxml files such as `openff-1.0.0.offxml`.

#### Parameters

**full\_paths** [bool, default=False] If False, return the name of each available \*.offxml file. If True, return the full path to each available .offxml file.

#### Returns

**available\_force\_fields** [List[str]] List of available force field files

## Parameter Type

ParameterType objects are representations of individual SMIRKS-based SMIRNOFF parameters. These are usually initialized during ForceField creation, and can be inspected and modified by users via the Python API. For more information, see [examples/forcefield\\_modification](#).

<a href="#">ParameterType</a>	Base class for SMIRNOFF parameter types.
<a href="#">BondHandler.BondType</a>	A SMIRNOFF bond type
<a href="#">AngleHandler.AngleType</a>	A SMIRNOFF angle type.
<a href="#">ProperTorsionHandler.ProperTorsionType</a>	A SMIRNOFF torsion type for proper torsions.
<a href="#">ImproperTorsionHandler.ImproperTorsionType</a>	A SMIRNOFF torsion type for improper torsions.
<a href="#">vdWHandler.vdWType</a>	A SMIRNOFF vdWForce type.
<a href="#">LibraryChargeHandler.LibraryChargeType</a>	A SMIRNOFF Library Charge type.
<a href="#">GBSAHandler.GBSAType</a>	A SMIRNOFF GBSA type.

## openforcefield.typing.engines.smirnoff.parameters.ParameterType

```
class openforcefield.typing.engines.smirnoff.parameters.ParameterType(smirks, al-
                                                                    low_cosmetic_attributes=False,
                                                                    **kwargs)
```

Base class for SMIRNOFF parameter types.

This base class provides utilities to create new parameter types. See the below for examples of how to do this.

**Warning:** This API is experimental and subject to change.

See also:

[ParameterAttribute](#)

[IndexedParameterAttribute](#)

## Examples

This class allows to define new parameter types by just listing its attributes. In the example below, `_VALENCE_TYPE` AND `_ELEMENT_NAME` are used for the validation of the SMIRKS pattern associated to the parameter and the automatic serialization/deserialization into a dict.

```
>>> class MyBondParameter(ParameterType):
...     _VALENCE_TYPE = 'Bond'
...     _ELEMENT_NAME = 'Bond'
...     length = ParameterAttribute(unit=unit.angstrom)
...     k = ParameterAttribute(unit=unit.kilocalorie_per_mole / unit.angstrom**2)
... 
```

The parameter automatically inherits the required `smirks` attribute from `ParameterType`. Associating a unit to a `ParameterAttribute` cause the attribute to accept only values in compatible units and to parse string expressions.

```
>>> my_par = MyBondParameter(
...     smirks='[*:1]-[*:2]',
...     length='1.01 * angstrom',
...     k=5 * unit.kilocalorie_per_mole / unit.angstrom**2
... )
>>> my_par.length
Quantity(value=1.01, unit=angstrom)
>>> my_par.k = 3.0 * unit.gram
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: k=3.0 g should have units of kilocalorie/
↳(angstrom**2*mole)
```

Each attribute can be made optional by specifying a default value, and you can attach a converter function by passing a callable as an argument or through the decorator syntax.

```
>>> class MyParameterType(ParameterType):
...     _VALENCE_TYPE = 'Atom'
...     _ELEMENT_NAME = 'Atom'
...
...     attr_optional = ParameterAttribute(default=2)
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to floats
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameterType(smirks='[*:1]', attr_all_to_float='3.0', attr_int_to_float=1)
>>> my_par.attr_optional
2
>>> my_par.attr_all_to_float
3.0
>>> my_par.attr_int_to_float
1.0
```

The float() function can convert strings to integers, but our custom converter forbids it

```
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_int_to_float = '4.0'
Traceback (most recent call last):
...
TypeError: Cannot convert '4.0' to float
```

Parameter attributes that can be indexed can be handled with the IndexedParameterAttribute. These support unit validation and converters exactly as ``ParameterAttribute``s, but the validation/conversion is performed for each indexed attribute.

```
>>> class MyTorsionType(ParameterType):
...     _VALENCE_TYPE = 'ProperTorsion'
...     _ELEMENT_NAME = 'Proper'
```

(continues on next page)

(continued from previous page)

```

...     periodicity = IndexedParameterAttribute(converter=int)
...     k = IndexedParameterAttribute(unit=unit.kilocalorie_per_mole)
...
>>> my_par = MyTorsionType(
...     smirks='[*:1]-[*:2]-[*:3]-[*:4]',
...     periodicity1=2,
...     k1=5 * unit.kilocalorie_per_mole,
...     periodicity2='3',
...     k2=6 * unit.kilocalorie_per_mole,
... )
>>> my_par.periodicity
[2, 3]

```

Indexed attributes, can be accessed both as a list or as their indexed parameter name.

```

>>> my_par.periodicity2 = 6
>>> my_par.periodicity[0] = 1
>>> my_par.periodicity
[1, 6]

```

### Attributes

**smirks** [str] The SMIRKS pattern that this parameter matches.

**id** [str or None] An optional identifier for the parameter.

**parent\_id** [str or None] Optionally, the identifier of the parameter of which this parameter is a specialization.

### Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

**\_\_init\_\_**(*smirks*, *allow\_cosmetic\_attributes=False*, *\*\*kwargs*)  
Create a ParameterType.

### Parameters

**smirks** [str] The SMIRKS match for the provided parameter type.

**allow\_cosmetic\_attributes** [bool optional. Default = False] Whether to permit non-spec kwargs (“cosmetic attributes”). If True, non-spec kwargs will be stored as an attribute of this parameter which can be accessed and written out. Otherwise an exception will be raised.

## Methods

<code>__init__(smirks[, allow_cosmetic_attributes])</code>	Create a <code>ParameterType</code> .
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

## Attributes

<code>id</code>	A descriptor for <code>ParameterType</code> attributes.
<code>parent_id</code>	A descriptor for <code>ParameterType</code> attributes.
<code>smirks</code>	A descriptor for <code>ParameterType</code> attributes.

**`add_cosmetic_attribute(attr_name, attr_value)`**

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**`attr_name`** [str] Name of the attribute to define for this object.

**`attr_value`** [str] The value of the attribute to define for this object.

**`attribute_is_cosmetic(attr_name)`**

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**`attr_name`** [str] The attribute name to check

### Returns

**`is_cosmetic`** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**`delete_cosmetic_attribute(attr_name)`**

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] Name of the cosmetic attribute to delete.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this object to dict format.

The returning dictionary contains all the ParameterAttribute and IndexedParameterAttribute as well as cosmetic attributes if discard\_cosmetic\_attributes is False.

### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False] Whether to discard non-spec attributes of this object

### Returns

**smirnoff\_dict** [dict] The SMIRNOFF-compliant dict representation of this object.

`openforcefield.typing.engines.smirnoff.parameters.BondHandler.BondType`

`openforcefield.typing.engines.smirnoff.parameters.AngleHandler.AngleType`

`openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler.ProperTorsionType`

`openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler.ImproperTorsionType`

`openforcefield.typing.engines.smirnoff.parameters.vdWHandler.vdWType`

`openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler.LibraryChargeType`

`openforcefield.typing.engines.smirnoff.parameters.GBSAHandler.GBSAType`

## Parameter Handlers

Each ForceField primarily consists of several ParameterHandler objects, which each contain the machinery to add one energy component to a system. During system creation, each ParameterHandler registered to a ForceField has its `assign_parameters()` function called..

<code>ParameterList</code>	Parameter list that also supports accessing items by SMARTS string.
<code>ParameterHandler</code>	Base class for parameter handlers.
<code>BondHandler</code>	Handle SMIRNOFF <Bonds> tags
<code>AngleHandler</code>	Handle SMIRNOFF <AngleForce> tags
<code>ProperTorsionHandler</code>	Handle SMIRNOFF <ProperTorsionForce> tags
<code>ImproperTorsionHandler</code>	Handle SMIRNOFF <ImproperTorsionForce> tags
<code>vdWHandler</code>	Handle SMIRNOFF <vdW> tags
<code>ElectrostaticsHandler</code>	Handles SMIRNOFF <Electrostatics> tags.

continues on next page

Table 69 – continued from previous page

<code>LibraryChargeHandler</code>	Handle SMIRNOFF <LibraryCharges> tags
<code>ToolkitAM1BCCHandler</code>	Handle SMIRNOFF <ToolkitAM1BCC> tags
<code>GBSAHandler</code>	Handle SMIRNOFF <GBSA> tags

**openforcefield.typing.engines.smirnoff.parameters.ParameterList**

**class** openforcefield.typing.engines.smirnoff.parameters.**ParameterList**(*input\_parameter\_list=None*)  
 Parameter list that also supports accessing items by SMARTS string.

**Warning:** This API is experimental and subject to change.

**Methods**

<code>append(parameter)</code>	Add a <code>ParameterType</code> object to the end of the <code>ParameterList</code>
<code>clear()</code>	Remove all items from list.
<code>copy()</code>	Return a shallow copy of the list.
<code>count(value, /)</code>	Return number of occurrences of value.
<code>extend(other)</code>	Add a <code>ParameterList</code> object to the end of the <code>ParameterList</code>
<code>index(item)</code>	Get the numerical index of a <code>ParameterType</code> object or SMIRKS in this <code>ParameterList</code> .
<code>insert(index, parameter)</code>	Add a <code>ParameterType</code> object as if this were a list
<code>pop([index])</code>	Remove and return item at index (default last).
<code>remove(value, /)</code>	Remove first occurrence of value.
<code>reverse()</code>	Reverse <i>IN PLACE</i> .
<code>sort(*[, key, reverse])</code>	Stable sort <i>IN PLACE</i> .
<code>to_list([discard_cosmetic_attributes])</code>	Render this <code>ParameterList</code> to a normal list, serializing each <code>ParameterType</code> object in it to dict.

**\_\_init\_\_**(*input\_parameter\_list=None*)

Initialize a new `ParameterList`, optionally providing a list of `ParameterType` objects to initially populate it.

**Parameters**

**input\_parameter\_list:** `list[ParameterType]`, **default=None** A pre-existing list of `ParameterType`-based objects. If `None`, this `ParameterList` will be initialized empty.

## Methods

<code>__init__([input_parameter_list])</code>	Initialize a new <code>ParameterList</code> , optionally providing a list of <code>ParameterType</code> objects to initially populate it.
<code>append(parameter)</code>	Add a <code>ParameterType</code> object to the end of the <code>ParameterList</code>
<code>clear(/)</code>	Remove all items from list.
<code>copy(/)</code>	Return a shallow copy of the list.
<code>count(value, /)</code>	Return number of occurrences of value.
<code>extend(other)</code>	Add a <code>ParameterList</code> object to the end of the <code>ParameterList</code>
<code>index(item)</code>	Get the numerical index of a <code>ParameterType</code> object or SMIRKS in this <code>ParameterList</code> .
<code>insert(index, parameter)</code>	Add a <code>ParameterType</code> object as if this were a list
<code>pop([index])</code>	Remove and return item at index (default last).
<code>remove(value, /)</code>	Remove first occurrence of value.
<code>reverse(/)</code>	Reverse <i>IN PLACE</i> .
<code>sort(*[, key, reverse])</code>	Stable sort <i>IN PLACE</i> .
<code>to_list([discard_cosmetic_attributes])</code>	Render this <code>ParameterList</code> to a normal list, serializing each <code>ParameterType</code> object in it to dict.

**`append(parameter)`**

Add a `ParameterType` object to the end of the `ParameterList`

### Parameters

**parameter** [a `ParameterType` object]

**`extend(other)`**

Add a `ParameterList` object to the end of the `ParameterList`

### Parameters

**other** [a `ParameterList`]

**`index(item)`**

Get the numerical index of a `ParameterType` object or SMIRKS in this `ParameterList`. Raises `ValueError` if the item is not found.

### Parameters

**item** [`ParameterType` object or str] The parameter or SMIRKS to look up in this `ParameterList`

### Returns

**index** [int] The index of the found item

**`insert(index, parameter)`**

Add a `ParameterType` object as if this were a list

### Parameters

**index** [int] The numerical position to insert the parameter at

**parameter** [a `ParameterType` object] The parameter to insert

**`to_list(discard_cosmetic_attributes=True)`**

Render this `ParameterList` to a normal list, serializing each `ParameterType` object in it to dict.



### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = True] Whether to discard non-spec attributes of each ParameterType object.

### Returns

**parameter\_list** [List[dict]] A serialized representation of a ParameterList, with each ParameterType it contains converted to dict.

**clear**(/)

Remove all items from list.

**copy**(/)

Return a shallow copy of the list.

**count**(value, /)

Return number of occurrences of value.

**pop**(index=-1, /)

Remove and return item at index (default last).

Raises IndexError if list is empty or index is out of range.

**remove**(value, /)

Remove first occurrence of value.

Raises ValueError if the value is not present.

**reverse**(/)

Reverse *IN PLACE*.

**sort**(\*, key=None, reverse=False)

Stable sort *IN PLACE*.

## openforcefield.typing.engines.smirnoff.parameters.ParameterHandler

```
class openforcefield.typing.engines.smirnoff.parameters.ParameterHandler(allow_cosmetic_attributes=False,
                                                                    skip_version_check=False,
                                                                    **kwargs)
```

Base class for parameter handlers.

Parameter handlers are configured with some global parameters for a given section. They may also contain a [ParameterList](#) populated with [ParameterType](#) objects if they are responsible for assigning SMIRKS-based parameters.

**Warning:** This API is experimental and subject to change.

### Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**known\_kwargs** List of kwargs that can be parsed by the function.

**parameters** The ParameterList that holds this ParameterHandler's parameter objects

**version** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwarg, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(handler_kwarg)</code>	Checks if a set of kwarg used to create a ParameterHandler are compatible with this ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the parameter_attrs argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	

`__init__`(*allow\_cosmetic\_attributes=False, skip\_version\_check=False, \*\*kwargs*)

Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

### Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check**: bool, optional. Default = False If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

### Methods

<code>__init__</code> ([allow_cosmetic_attributes, ...])	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute</code> (attr_name, attr_value)	Add a cosmetic attribute to this object.
<code>add_parameter</code> ([parameter_kwargs, parameter, ...])	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters</code> (topology, system)	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules</code> (...)	
<code>attribute_is_cosmetic</code> (attr_name)	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility</code> (handler_kwargs)	Checks if a set of kwargs used to create a ParameterHandler are compatible with this ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates</code> (pb_mols)	
<code>delete_cosmetic_attribute</code> (attr_name)	Delete a cosmetic attribute from this object.
<code>find_matches</code> (entity)	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter</code> (parameter_attrs)	Return the parameters in this ParameterHandler that match the parameter_attrs argument.
<code>postprocess_system</code> (topology, system, **kwargs)	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict</code> ([discard_cosmetic_attributes])	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

## Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>version</code>	A descriptor for ParameterType attributes.

### property parameters

The ParameterList that holds this ParameterHandler's parameter objects

### property TAGNAME

The name of this ParameterHandler corresponding to the SMIRNOFF tag name

### Returns

**handler\_name** [str] The name of this parameter handler

### property known\_kwargs

List of kwargs that can be parsed by the function.

### check\_handler\_compatibility(handler\_kwargs)

Checks if a set of kwargs used to create a ParameterHandler are compatible with this ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.

### Parameters

**handler\_kwargs** [dict] The kwargs that would be used to construct

### Raises

**IncompatibleParameterError** if **handler\_kwargs** are incompatible with existing parameters.

### add\_parameter(parameter\_kwargs=None, parameter=None, after=None, before=None)

Add a parameter to the forcefield, ensuring all parameters are valid.

### Parameters

**parameter\_kwargs: dict, optional** The kwargs to pass to the ParameterHandler.INFOType (a ParameterType) constructor

**parameter: ParameterType, optional** A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

## Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks `[:1]=[:2]`

```
>>> bh.add_parameter(param, after='[:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

### `get_parameter(parameter_attrs)`

Return the parameters in this ParameterHandler that match the `parameter_attrs` argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

#### Parameters

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[[:1]~[#16:2]=,[:[#6:3]~[:4]", "id": "t105"} )

#### Returns

**params** [list of ParameterType objects] A list of matching ParameterType objects

## Examples

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[*:1]-[:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[*:1]-[:2]'})
[<BondType with smirks: [:1]-[:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

### `find_matches(entity)`

Find the elements of the topology/molecule matched by a parameter type.

**Parameters**

**entity** [openforcefield.topology.Topology] Topology to search.

**Returns**

**matches** [ValenceDict[Tuple[int], ParameterHandler.Match]]  
 matches[particle\_indices] is the ParameterType object matching the tuple of particle indices in entity.

**assign\_parameters**(*topology*, *system*)

Assign parameters for the given Topology to the specified System object.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**postprocess\_system**(*topology*, *system*, *\*\*kwargs*)

Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

**Parameters**

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

**Returns**

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] The attribute name to check

#### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] Name of the cosmetic attribute to delete.

### openforcefield.typing.engines.smirnoff.parameters.BondHandler

**class** openforcefield.typing.engines.smirnoff.parameters.**BondHandler**(\*\*kwargs)  
Handle SMIRNOFF <Bonds> tags

**Warning:** This API is experimental and subject to change.

#### Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**fractional\_bondorder\_interpolation** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value  
converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.



**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
```

(continues on next page)

(continued from previous page)

```
...         raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**`fractional_bondorder_method`** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**`default`** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**`unit`** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**`converter`** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**`IndexedParameterAttribute`** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**known\_kwargs** List of kwargs that can be parsed by the function.

**parameters** The `ParameterList` that holds this `ParameterHandler`'s parameter objects

**potential** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**version** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

## Methods

<code>BondType(**kwargs)</code>	A SMIRNOFF bond type
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	
<code>create_force</code>	

`__init__(**kwargs)`

Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

## Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check**: **bool, optional. Default = False** If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

## Methods

<code>__init__(**kwargs)</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

## Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>fractional_bondorder_interpolation</code>	A descriptor for ParameterType attributes.
<code>fractional_bondorder_method</code>	A descriptor for ParameterType attributes.
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>potential</code>	A descriptor for ParameterType attributes.
<code>version</code>	A descriptor for ParameterType attributes.

**class BondType(\*\*kwargs)**  
A SMIRNOFF bond type



**Warning:** This API is experimental and subject to change.

## Attributes

**id** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value  
converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
```

(continues on next page)

(continued from previous page)

```

>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

#### k A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
```

(continues on next page)

(continued from previous page)

```

...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**k\_bondorder** The attribute of a parameter in which each term is a mapping.

The substantial difference with `IndexedParameterAttribute` is that, unlike indexing, the mapping can be based on arbitrary references, like indices but can starting at non-zero values and include non-adjacent keys.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of mappings where values are quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each component of each element of the sequence before setting the attribute.

**IndexedParameterAttribute** A parameter attribute representing a sequence.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```

>>> from simtk import unit
>>> class MyParameter:
...     length = MappedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True

```

Like other `ParameterAttribute` objects, strings are parsed into `Quantity` objects.

```

>>> my_par.length = {1: '1.5 * angstrom', 2: '1.4 * angstrom'}
>>> my_par.length[1]
Quantity(value=1.5, unit=angstrom)

```

Unlike other `ParameterAttribute` objects, the reference points can do not need ot be zero-indexed, non-adjacent, such as interpolating defining a bond parameter for interpolation by defining references values and bond orders 2 and 3:

```
>>> my_par.length = {2:'1.42 * angstrom', 3: '1.35 * angstrom'}
>>> my_par.length[2]
Quantity(value=1.42, unit=angstrom)
```

**length** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```

>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

**length\_bondorder** The attribute of a parameter in which each term is a mapping.

The substantial difference with `IndexedParameterAttribute` is that, unlike indexing, the mapping can be based on arbitrary references, like indices but can starting at non-zero values and include non-adjacent keys.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of mappings where values are quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate

and cast each component of each element of the sequence before setting the attribute.

**IndexedParameterAttribute** A parameter attribute representing a sequence.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = MappedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Like other ParameterAttribute objects, strings are parsed into Quantity objects.

```
>>> my_par.length = {1: '1.5 * angstrom', 2: '1.4 * angstrom'}
>>> my_par.length[1]
Quantity(value=1.5, unit=angstrom)
```

Unlike other ParameterAttribute objects, the reference points can do not need to be zero-indexed, non-adjacent, such as interpolating defining a bond parameter for interpolation by defining references values and bond orders 2 and 3:

```
>>> my_par.length = {2: '1.42 * angstrom', 3: '1.35 * angstrom'}
>>> my_par.length[2]
Quantity(value=1.42, unit=angstrom)
```

**parent\_id** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

attr\_all\_to\_float accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
```

(continues on next page)



(continued from previous page)

```

1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**smirks** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```

converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value

```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()

```

Even without explicit assignment, the default value is returned.

```

>>> my_par.attr_optional
2

```

If you try to access an attribute without setting it first, an exception is raised.

```

>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'

```

The attribute allow automatic conversion and validation of units.

```

>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] The attribute name to check

**Returns**

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this object to dict format.

The returning dictionary contains all the ParameterAttribute and IndexedParameterAttribute as well as cosmetic attributes if *discard\_cosmetic\_attributes* is False.

**Parameters**

**discard\_cosmetic\_attributes** [bool, optional. Default = False] Whether to discard non-spec attributes of this object

**Returns**

**smirnoff\_dict** [dict] The SMIRNOFF-compliant dict representation of this object.

**check\_handler\_compatibility**(*other\_handler*)

Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.

**Parameters**

**other\_handler** [a ParameterHandler object] The handler to compare to.

**Raises**

**IncompatibleParameterError** if `handler_kwargs` are incompatible with existing parameters.

**property** TAGNAME

The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**Returns**

**handler\_name** [str] The name of this parameter handler

**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(*parameter\_kwargs=None*, *parameter=None*, *after=None*, *before=None*)

Add a parameter to the forcefield, ensuring all parameters are valid.

**Parameters**

**parameter\_kwargs: dict, optional** The kwargs to pass to the ParameterHandler.INFO\_TYPE (a ParameterType) constructor

**parameter: ParameterType, optional** A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

## Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[:1]-[:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[:1]=[:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[:1]#[:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks `[:1]=[:2]`

```
>>> bh.add_parameter(param, after='[:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

**assign\_parameters**(*topology*, *system*)

Assign parameters for the given Topology to the specified System object.

### Parameters

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] The attribute name to check

### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**find\_matches(entity)**

Find the elements of the topology/molecule matched by a parameter type.

**Parameters**

**entity** [openforcefield.topology.Topology] Topology to search.

**Returns**

**matches** [ValenceDict[Tuple[int], ParameterHandler.Match]]  
matches[particle\_indices] is the ParameterType object matching the tuple of particle indices in entity.

**get\_parameter(parameter\_attrs)**

Return the parameters in this ParameterHandler that match the parameter\_attrs argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

**Parameters**

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[\*:1]~[\*:2]=,.[#6:3]~[\*:4]", "id": "t105"})

**Returns**

**params** [list of ParameterType objects] A list of matching ParameterType objects

**Examples**

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[*:1]-[*:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[*:1]-[*:2]'})
[<BondType with smirks: [*:1]-[*:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

**property known\_kwargs**

List of kwargs that can be parsed by the function.

**property parameters**

The ParameterList that holds this ParameterHandler's parameter objects

**postprocess\_system(topology, system, \*\*kwargs)**

Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

#### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

#### Returns

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

### openforcefield.typing.engines.smirnoff.parameters.AngleHandler

```
class openforcefield.typing.engines.smirnoff.parameters.AngleHandler(allow_cosmetic_attributes=False,  
                                                                    skip_version_check=False,  
                                                                    **kwargs)
```

Handle SMIRNOFF <AngleForce> tags

**Warning:** This API is experimental and subject to change.

#### Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**known\_kwargs** List of kwargs that can be parsed by the function.

**parameters** The ParameterList that holds this ParameterHandler's parameter objects

**potential** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value converter(instance, parameter_attribute,  
value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```



`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**version** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

## Methods

<code>AngleType(smirks[, allow_cosmetic_attributes])</code>	A SMIRNOFF angle type.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwarg, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	
<code>create_force</code>	

`__init__(allow_cosmetic_attributes=False, skip_version_check=False, **kwargs)`  
 Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

### Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check**: bool, optional. Default = False If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

## Methods

<code>__init__([allow_cosmetic_attributes, ...])</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the parameter_attrs argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

## Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>potential</code>	A descriptor for ParameterType attributes.
<code>version</code>	A descriptor for ParameterType attributes.

**class** `AngleType(smirks, allow_cosmetic_attributes=False, **kwargs)`  
 A SMIRNOFF angle type.

**Warning:** This API is experimental and subject to change.

## Attributes

**angle** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**id** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
```

(continues on next page)

(continued from previous page)

```
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

#### k A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.



```

>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**parent\_id** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
```

(continues on next page)

(continued from previous page)

```

...     # This converter converts only integers to float
...     # and raise an exception for the other types.
...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**smirks** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()

```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] The attribute name to check

### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] Name of the cosmetic attribute to delete.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this object to dict format.

The returning dictionary contains all the ParameterAttribute and IndexedParameterAttribute as well as cosmetic attributes if *discard\_cosmetic\_attributes* is False.

### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False] Whether to discard non-spec attributes of this object

**Returns**

**smirnoff\_dict** [dict] The SMIRNOFF-compliant dict representation of this object.

**check\_handler\_compatibility**(*other\_handler*)

Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.

**Parameters**

**other\_handler** [a ParameterHandler object] The handler to compare to.

**Raises**

**IncompatibleParameterError** if **handler\_kwargs** are incompatible with existing parameters.

**property** TAGNAME

The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**Returns**

**handler\_name** [str] The name of this parameter handler

**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(*parameter\_kwargs=None*, *parameter=None*, *after=None*, *before=None*)

Add a parameter to the forcefield, ensuring all parameters are valid.

**Parameters**

**parameter\_kwargs: dict, optional** The kwargs to pass to the ParameterHandler.INFO\_TYPE (a ParameterType) constructor

**parameter: ParameterType, optional** A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

## Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks `[:1]=[:2]`

```
>>> bh.add_parameter(param, after='[:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

**assign\_parameters**(*topology*, *system*)

Assign parameters for the given Topology to the specified System object.

### Parameters

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] The attribute name to check

### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**find\_matches(entity)**

Find the elements of the topology/molecule matched by a parameter type.

**Parameters**

**entity** [openforcefield.topology.Topology] Topology to search.

**Returns**

**matches** [ValenceDict[Tuple[int], ParameterHandler.Match]]  
matches[particle\_indices] is the ParameterType object matching the tuple of particle indices in entity.

**get\_parameter(parameter\_attrs)**

Return the parameters in this ParameterHandler that match the parameter\_attrs argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

**Parameters**

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[\*:1]~[\*:2]=,.[#6:3]~[\*:4]", "id": "t105"})

**Returns**

**params** [list of ParameterType objects] A list of matching ParameterType objects

**Examples**

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[*:1]-[*:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[*:1]-[*:2]'})
[<BondType with smirks: [*:1]-[*:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

**property known\_kwargs**

List of kwargs that can be parsed by the function.

**property parameters**

The ParameterList that holds this ParameterHandler's parameter objects

**postprocess\_system(topology, system, \*\*kwargs)**

Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

**Parameters**



**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

#### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

#### Returns

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

### openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler

```
class openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler(allow_cosmetic_attributes=False,  
                                                                           skip_version_check=False,  
                                                                           **kwargs)
```

Handle SMIRNOFF <ProperTorsionForce> tags

**Warning:** This API is experimental and subject to change.

#### Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**default\_idivf** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value  converter(instance, parameter_attribute,  
value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

attr\_all\_to\_float accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
```

(continues on next page)

(continued from previous page)

```

1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

**fractional\_bondorder\_interpolation** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()

```

Even without explicit assignment, the default value is returned.

```

>>> my_par.attr_optional
2

```

If you try to access an attribute without setting it first, an exception is raised.

```

>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'

```

The attribute allow automatic conversion and validation of units.

```

>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**`fractional_bondorder_method`** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
```

(continues on next page)

(continued from previous page)

```

...     # This converter converts only integers to float
...     # and raise an exception for the other types.
...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**known\_kwargs** List of kwargs that can be parsed by the function.

**parameters** The `ParameterList` that holds this `ParameterHandler`'s parameter objects

**potential** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [`simtk.unit.Quantity`, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

attr\_all\_to\_float accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
```

(continues on next page)

(continued from previous page)

```
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

**version** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.



```

>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float

## Methods

<code>ProperTorsionType(smirks[, ...])</code>	A SMIRNOFF torsion type for proper torsions.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.

continues on next page

Table 83 – continued from previous page

<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	
<code>create_force</code>	

`__init__(allow_cosmetic_attributes=False, skip_version_check=False, **kwargs)`

Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

#### Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check**: bool, optional. Default = False If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

#### Methods

<code>__init__([allow_cosmetic_attributes, ...])</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.

continues on next page

Table 84 – continued from previous page

<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the parameter_attrs argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

### Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>default_idivf</code>	A descriptor for ParameterType attributes.
<code>fractional_bondorder_interpolation</code>	A descriptor for ParameterType attributes.
<code>fractional_bondorder_method</code>	A descriptor for ParameterType attributes.
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>potential</code>	A descriptor for ParameterType attributes.
<code>version</code>	A descriptor for ParameterType attributes.

**class ProperTorsionType**(*smirks*, *allow\_cosmetic\_attributes=False*, *\*\*kwargs*)

A SMIRNOFF torsion type for proper torsions.

**Warning:** This API is experimental and subject to change.

### Attributes

**id** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
```

(continues on next page)

(continued from previous page)

```

...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**idivf** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as `k1`, `k2`, ..., and `IndexedParameterAttribute` can be used to encapsulate the sequence of terms.

The only substantial difference with `ParameterAttribute` is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [`simtk.unit.Quantity`, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```

>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...

```

(continues on next page)

(continued from previous page)

```
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with ParameterAttribute, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**k** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as k1, k2, ..., and IndexedParameterAttribute can be used to encapsulate the sequence of terms.

The only substantial difference with ParameterAttribute is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
```

(continues on next page)

(continued from previous page)

```
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with ParameterAttribute, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**k\_bondorder** The attribute of a parameter with an unspecified number of terms, where each term is a mapping.

Some parameters can be associated to multiple terms, where those terms have multiple components. For example, torsions with fractional bond orders have parameters such as `k1_bondorder1`, `k1_bondorder2`, `k2_bondorder1`, `k2_bondorder2`, ..., and `IndexedMappedParameterAttribute` can be used to encapsulate the sequence of terms as mappings (typically, `dict`s) of their components.

The only substantial difference with `IndexedParameterAttribute` is that only sequences of mappings are supported as values and converters and units are checked on each component of each element in the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of mappings where values are quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each component of each element of the sequence before setting the attribute.

**IndexedParameterAttribute** A parameter attribute representing a sequence.

**MappedParameterAttribute** A parameter attribute representing a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedMappedParameterAttribute(default=None, unit=unit.
↪ angstrom)
```

(continues on next page)

(continued from previous page)

```
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = [{1: '1 * angstrom'}, {1: 0.5 * unit.nanometer}]
>>> my_par.length[0]
{1: Quantity(value=1, unit=angstrom)}
```

Similarly, custom converters work as with ParameterAttribute, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedMappedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [{1: 1}, {2: '1.0', 3: '1e-2'}, {4: 4.0}]
>>> my_par.attr_indexed
[{1: 1.0}, {2: 1.0, 3: 0.01}, {4: 4.0}]
```

**parent\_id** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value  
converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.



```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

attr\_all\_to\_float accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to attr\_int\_to\_float converts only integers instead. >>> my\_par.attr\_int\_to\_float = 3 >>> my\_par.attr\_int\_to\_float 3.0 >>> my\_par.attr\_int\_to\_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float

**periodicity** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as `k1`, `k2`, ..., and `IndexedParameterAttribute` can be used to encapsulate the sequence of terms.

The only substantial difference with `ParameterAttribute` is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [`simtk.unit.Quantity`, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into `Quantity` objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with `ParameterAttribute`, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**phase** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as `k1`, `k2`, ..., and `IndexedParameterAttribute` can be used to encapsulate the sequence of terms.

The only substantial difference with `ParameterAttribute` is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with `ParameterAttribute`, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**smirks** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

**add\_cosmetic\_attribute(attr\_name, attr\_value)**

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

## Parameters

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**attribute\_is\_cosmetic(attr\_name)**

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] The attribute name to check

**Returns**

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(attr\_name)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**to\_dict**(discard\_cosmetic\_attributes=False)

Convert this object to dict format.

The returning dictionary contains all the ParameterAttribute and IndexedParameterAttribute as well as cosmetic attributes if discard\_cosmetic\_attributes is False.

**Parameters**

**discard\_cosmetic\_attributes** [bool, optional. Default = False] Whether to discard non-spec attributes of this object

**Returns**

**smirnoff\_dict** [dict] The SMIRNOFF-compliant dict representation of this object.

**check\_handler\_compatibility**(other\_handler)

Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.

**Parameters**

**other\_handler** [a ParameterHandler object] The handler to compare to.

**Raises**

**IncompatibleParameterError** if handler\_kwargs are incompatible with existing parameters.

**property** TAGNAME

The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**Returns**

**handler\_name** [str] The name of this parameter handler

**add\_cosmetic\_attribute**(attr\_name, attr\_value)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(*parameter\_kwargs=None, parameter=None, after=None, before=None*)

Add a parameter to the forcefield, ensuring all parameters are valid.

### Parameters

**parameter\_kwargs:** dict, optional The kwargs to pass to the ParameterHandler.INFO\_TYPE (a ParameterType) constructor

**parameter:** ParameterType, optional A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

### Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks `[:1]=[:2]`

```
>>> bh.add_parameter(param, after='[:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

**assign\_parameters**(*topology*, *system*)

Assign parameters for the given Topology to the specified System object.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] The attribute name to check

**Returns**

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**find\_matches**(*entity*)

Find the elements of the topology/molecule matched by a parameter type.

**Parameters**

**entity** [openforcefield.topology.Topology] Topology to search.

**Returns**

**matches** [ValenceDict[Tuple[int], ParameterHandler.\_Match]]  
matches[particle\_indices] is the ParameterType object matching the tuple of particle indices in entity.

**get\_parameter**(*parameter\_attrs*)

Return the parameters in this ParameterHandler that match the parameter\_attrs argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

**Parameters**

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[\*:1]~[#16:2]=,:[#6:3]~[:4]", "id": "t105"})



**Returns**

**params** [list of ParameterType objects] A list of matching ParameterType objects

**Examples**

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[:1]-[:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[:1]-[:2]'})
[<BondType with smirks: [:1]-[:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

**property known\_kwargs**

List of kwargs that can be parsed by the function.

**property parameters**

The ParameterList that holds this ParameterHandler's parameter objects

**postprocess\_system(topology, system, \*\*kwargs)**

Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**to\_dict(discard\_cosmetic\_attributes=False)**

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

**Parameters**

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

**Returns**

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

`openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler`

```
class openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler(allow_cosmetic_attributes=False,  
                                                                              skip_version_check=False,  
                                                                              **kwargs)
```

Handle SMIRNOFF <ImproperTorsionForce> tags

**Warning:** This API is experimental and subject to change.

### Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**default\_idivf** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value  converter(instance, parameter_attribute,  
value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3` `>>> my_par.attr_int_to_float 3.0` `>>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float

**known\_kwargs** List of kwargs that can be parsed by the function.

**parameters** The ParameterList that holds this ParameterHandler's parameter objects

**potential** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**version** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

## Methods

<code>ImproperTorsionType(smirks[, ...])</code>	A SMIRNOFF torsion type for improper torsions.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the improper torsions in the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	
<code>create_force</code>	

`__init__(allow_cosmetic_attributes=False, skip_version_check=False, **kwargs)`  
Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

## Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check:** *bool, optional. Default = False* If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [*dict*] The dict representation of the SMIRNOFF data source

## Methods

<code>__init__([allow_cosmetic_attributes, ...])</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the improper torsions in the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

## Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>default_idivf</code>	A descriptor for ParameterType attributes.
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>potential</code>	A descriptor for ParameterType attributes.
<code>version</code>	A descriptor for ParameterType attributes.

**class ImproperTorsionType(smirks, allow\_cosmetic\_attributes=False, \*\*kwargs)**

A SMIRNOFF torsion type for improper torsions.



**Warning:** This API is experimental and subject to change.

## Attributes

**id** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value  
converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
```

(continues on next page)

(continued from previous page)

```

>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**idivf** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as `k1`, `k2`, ..., and `IndexedParameterAttribute` can be used to encapsulate the sequence of terms.

The only substantial difference with `ParameterAttribute` is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with ParameterAttribute, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**k** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as k1, k2, ..., and IndexedParameterAttribute can be used to encapsulate the sequence of terms.

The only substantial difference with ParameterAttribute is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with ParameterAttribute, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**parent\_id** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value  
converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**periodicity** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as `k1`, `k2`, ..., and `IndexedParameterAttribute` can be used to encapsulate the sequence of terms.

The only substantial difference with `ParameterAttribute` is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [`simtk.unit.Quantity`, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into `Quantity` objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with `ParameterAttribute`, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**phase** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as `k1`, `k2`, ..., and `IndexedParameterAttribute` can be used to encapsulate the sequence of terms.

The only substantial difference with `ParameterAttribute` is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with `ParameterAttribute`, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**smirks** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.



```

>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] The attribute name to check

**Returns**

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this object to dict format.

The returning dictionary contains all the ParameterAttribute and IndexedParameterAttribute as well as cosmetic attributes if *discard\_cosmetic\_attributes* is False.

**Parameters**

**discard\_cosmetic\_attributes** [bool, optional. Default = False] Whether to discard non-spec attributes of this object

**Returns**

**smirnoff\_dict** [dict] The SMIRNOFF-compliant dict representation of this object.

**check\_handler\_compatibility**(*other\_handler*)

Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.

**Parameters**

**other\_handler** [a ParameterHandler object] The handler to compare to.

**Raises**

**IncompatibleParameterError** if `handler_kwargs` are incompatible with existing parameters.

**find\_matches**(*entity*)

Find the improper torsions in the topology/molecule matched by a parameter type.

**Parameters**

**entity** [openforcefield.topology.Topology] Topology to search.

**Returns**

**matches** [ImproperDict[Tuple[int], ParameterHandler.\_Match]]  
 matches[atom\_indices] is the ParameterType object matching the 4-tuple of atom indices in entity.

**property** TAGNAME

The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**Returns**

**handler\_name** [str] The name of this parameter handler

**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(*parameter\_kwargs=None*, *parameter=None*, *after=None*, *before=None*)

Add a parameter to the forcefield, ensuring all parameters are valid.

**Parameters**

**parameter\_kwargs: dict, optional** The kwargs to pass to the ParameterHandler.INFO\_TYPE (a ParameterType) constructor

**parameter: ParameterType, optional** A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

## Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[*:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[*:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[*:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks `[:1]=[:2]`

```
>>> bh.add_parameter(param, after='[:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

**assign\_parameters**(*topology*, *system*)

Assign parameters for the given Topology to the specified System object.

### Parameters

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] The attribute name to check

### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**get\_parameter**(*parameter\_attrs*)

Return the parameters in this ParameterHandler that match the *parameter\_attrs* argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

**Parameters**

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[\*:1]~[#16:2]=,.[#6:3]~[:4]", "id": "t105"} )

**Returns**

**params** [list of ParameterType objects] A list of matching ParameterType objects

**Examples**

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[*:1]-[:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[*:1]-[:2]'})
[<BondType with smirks: [:1]-[:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

**property known\_kwargs**

List of kwargs that can be parsed by the function.

**property parameters**

The ParameterList that holds this ParameterHandler's parameter objects

**postprocess\_system**(*topology*, *system*, \*\*kwargs)

Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

**Parameters**

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

#### Returns

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

### openforcefield.typing.engines.smirnoff.parameters.vdWHandler

**class** openforcefield.typing.engines.smirnoff.parameters.vdWHandler(*allow\_cosmetic\_attributes=False*, *skip\_version\_check=False*, *\*\*kwargs*)

Handle SMIRNOFF <vdW> tags

**Warning:** This API is experimental and subject to change.

#### Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**combining\_rules** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value  
converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**cutoff** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value  
converter(instance, parameter_attribute,  
value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:  
...     attr_required = ParameterAttribute()  
...     attr_optional = ParameterAttribute(default=2)  
...  
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional  
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required  
Traceback (most recent call last):  
...  
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit  
>>> class MyParameter:  
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)  
...  
>>> my_par = MyParameter()  
>>> my_par.attr_quantity = '1.0 * nanometer'  
>>> my_par.attr_quantity  
Quantity(value=1.0, unit=nanometer)  
>>> my_par.attr_quantity = 3.0  
Traceback (most recent call last):
```

(continues on next page)



(continued from previous page)

```
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**known\_kwargs** List of kwargs that can be parsed by the function.

**method** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**parameters** The `ParameterList` that holds this `ParameterHandler`'s parameter objects

**potential** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [`simtk.unit.Quantity`, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**scale12** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value converter(instance, parameter_attribute,
value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

### scale13 A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

attr\_all\_to\_float accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
```

(continues on next page)

(continued from previous page)

```
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

**scale14** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.



```

>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**scale15** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```

converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value

```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
```

(continues on next page)

(continued from previous page)

```

...     # This converter converts only integers to float
...     # and raise an exception for the other types.
...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**switch\_width** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()

```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**version** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3` `>>> my_par.attr_int_to_float 3.0` `>>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_charges_assigned(ref_mol, topology)</code>	Check whether charges have been assigned for a reference molecule.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.

continues on next page

Table 91 – continued from previous page

<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>mark_charges_assigned(ref_mol, topology)</code>	Record that charges have been assigned for a reference molecule.
<code>postprocess_system(system, topology, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.
<code>vdWType(**kwargs)</code>	A SMIRNOFF vdWForce type.

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	
<code>create_force</code>	

`__init__(allow_cosmetic_attributes=False, skip_version_check=False, **kwargs)`  
 Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

#### Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check**: bool, optional. Default = False If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

#### Methods

<code>__init__([allow_cosmetic_attributes, ...])</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_charges_assigned(ref_mol, topology)</code>	Check whether charges have been assigned for a reference molecule.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.

continues on next page

Table 92 – continued from previous page

<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>mark_charges_assigned(ref_mol, topology)</code>	Record that charges have been assigned for a reference molecule.
<code>postprocess_system(system, topology, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

### Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>combining_rules</code>	A descriptor for ParameterType attributes.
<code>cutoff</code>	A descriptor for ParameterType attributes.
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>method</code>	A descriptor for ParameterType attributes.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>potential</code>	A descriptor for ParameterType attributes.
<code>scale12</code>	A descriptor for ParameterType attributes.
<code>scale13</code>	A descriptor for ParameterType attributes.
<code>scale14</code>	A descriptor for ParameterType attributes.
<code>scale15</code>	A descriptor for ParameterType attributes.
<code>switch_width</code>	A descriptor for ParameterType attributes.
<code>version</code>	A descriptor for ParameterType attributes.

**class** `vdWType(**kwargs)`  
 A SMIRNOFF vdWForce type.

**Warning:** This API is experimental and subject to change.

### Attributes

**epsilon** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures



`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
```

(continues on next page)

(continued from previous page)

```

...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**id** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
```

(continues on next page)

(continued from previous page)

```
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**parent\_id** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```

>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**rmin\_half** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↪ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
```

(continues on next page)

(continued from previous page)

```

...     # This converter converts only integers to float
...     # and raise an exception for the other types.
...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**sigma** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()

```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

attr\_all\_to\_float accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to attr\_int\_to\_float converts only integers instead. >>> my\_par.attr\_int\_to\_float = 3 >>> my\_par.attr\_int\_to\_float 3.0 >>> my\_par.attr\_int\_to\_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float



**smirks** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

### `add_cosmetic_attribute(attr_name, attr_value)`

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] Name of the attribute to define for this object.  
**attr\_value** [str] The value of the attribute to define for this object.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] The attribute name to check

#### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] Name of the cosmetic attribute to delete.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this object to dict format.

The returning dictionary contains all the ParameterAttribute and IndexedParameterAttribute as well as cosmetic attributes if *discard\_cosmetic\_attributes* is False.

#### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False] Whether to discard non-spec attributes of this object

#### Returns

**smirnoff\_dict** [dict] The SMIRNOFF-compliant dict representation of this object.

**check\_handler\_compatibility**(*other\_handler*)

Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.

#### Parameters

**other\_handler** [a ParameterHandler object] The handler to compare to.

#### Raises

**IncompatibleParameterError** if *handler\_kwargs* are incompatible with existing parameters.

**postprocess\_system**(*system, topology, \*\*kwargs*)

Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**property** TAGNAME

The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**Returns**

**handler\_name** [str] The name of this parameter handler

**add\_cosmetic\_attribute**(attr\_name, attr\_value)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(parameter\_kwargs=None, parameter=None, after=None, before=None)

Add a parameter to the forcefield, ensuring all parameters are valid.

**Parameters**

**parameter\_kwargs: dict, optional** The kwargs to pass to the ParameterHandler.INFO\_TYPE (a ParameterType) constructor

**parameter: ParameterType, optional** A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

## Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks `[:1]=[:2]`

```
>>> bh.add_parameter(param, after='[:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

**assign\_parameters**(*topology*, *system*)

Assign parameters for the given Topology to the specified System object.

### Parameters

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] The attribute name to check

### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**static check\_charges\_assigned**(*ref\_mol*, *topology*)

Check whether charges have been assigned for a reference molecule.

### Parameters

**ref\_mol** [openforcefield.topology.Molecule] The molecule to check for having charges assigned

**topology** [openforcefield.topology.Topology] The topology to query for this information

#### Returns

**charges\_assigned** [bool] Whether charges have already been assigned to this molecule

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] Name of the cosmetic attribute to delete.

**find\_matches**(*entity*)

Find the elements of the topology/molecule matched by a parameter type.

#### Parameters

**entity** [openforcefield.topology.Topology] Topology to search.

#### Returns

**matches** [ValenceDict[Tuple[int], ParameterHandler.\_Match]]  
matches[particle\_indices] is the ParameterType object matching the tuple of particle indices in entity.

**get\_parameter**(*parameter\_attrs*)

Return the parameters in this ParameterHandler that match the *parameter\_attrs* argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

#### Parameters

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[\*:1]~[#16:2]=,:[#6:3]~[:4]", "id": "t105"})

#### Returns

**params** [list of ParameterType objects] A list of matching ParameterType objects

### Examples

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[*:1]-[:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[:1]-[:2]'})
[<BondType with smirks: [:1]-[:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

**property known\_kwargs**

List of kwargs that can be parsed by the function.

**mark\_charges\_assigned(ref\_mol, topology)**

Record that charges have been assigned for a reference molecule.

**Parameters**

**ref\_mol** [openforcefield.topology.Molecule] The molecule to mark as having charges assigned

**topology** [openforcefield.topology.Topology] The topology to record this information on.

**property parameters**

The ParameterList that holds this ParameterHandler's parameter objects

**to\_dict(discard\_cosmetic\_attributes=False)**

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

**Parameters**

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

**Returns**

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

**openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler**

```
class openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler(allow_cosmetic_attributes=False,
                                                                              skip_version_check=False,
                                                                              **kwargs)
```

Handles SMIRNOFF <Electrostatics> tags.

**Warning:** This API is experimental and subject to change.

**Attributes**

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**cutoff** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
```

(continues on next page)



(continued from previous page)

```

...     # This converter converts only integers to float
...     # and raise an exception for the other types.
...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

**known\_kwargs** List of kwargs that can be parsed by the function.

**method** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```

converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value

```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)

```

(continues on next page)

(continued from previous page)

```
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**parameters** The `ParameterList` that holds this `ParameterHandler`'s parameter objects

**scale12** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [`simtk.unit.Quantity`, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
```

(continues on next page)

(continued from previous page)

```

...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float

**scale13** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```

converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value

```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
```

(continues on next page)

(continued from previous page)

```

...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

**scale14** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```

converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value

```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()

```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**scale15** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
```

(continues on next page)



(continued from previous page)

```
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**switch\_width** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**version** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwarg, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_charge_from_molecules(molecule, ...)</code>	Given an input molecule, checks against a list of molecules for an isomorphic match.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_charges_assigned(ref_mol, topology)</code>	Check whether charges have been assigned for a reference molecule.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>mark_charges_assigned(ref_mol, topology)</code>	Record that charges have been assigned for a reference molecule.
<code>postprocess_system(system, topology, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	
<code>create_force</code>	

`__init__(allow_cosmetic_attributes=False, skip_version_check=False, **kwargs)`  
 Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

### Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check**: bool, optional. Default = False If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

## Methods

<code>__init__([allow_cosmetic_attributes, ...])</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_charge_from_molecules(molecule, ...)</code>	Given an input molecule, checks against a list of molecules for an isomorphic match.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_charges_assigned(ref_mol, topology)</code>	Check whether charges have been assigned for a reference molecule.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the parameter_attrs argument.
<code>mark_charges_assigned(ref_mol, topology)</code>	Record that charges have been assigned for a reference molecule.
<code>postprocess_system(system, topology, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

## Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>cutoff</code>	A descriptor for ParameterType attributes.
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>method</code>	A descriptor for ParameterType attributes.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>scale12</code>	A descriptor for ParameterType attributes.
<code>scale13</code>	A descriptor for ParameterType attributes.
<code>scale14</code>	A descriptor for ParameterType attributes.
<code>scale15</code>	A descriptor for ParameterType attributes.
<code>switch_width</code>	A descriptor for ParameterType attributes.

continues on next page

Table 97 – continued from previous page

version	A descriptor for ParameterType attributes.
<p><b>check_handler_compatibility</b>(<i>other_handler</i>)</p> <p>Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.</p> <p><b>Parameters</b></p> <p><b>other_handler</b> [a ParameterHandler object] The handler to compare to.</p> <p><b>Raises</b></p> <p><b>IncompatibleParameterError</b> if <b>handler_kwargs</b> are incompatible with existing parameters.</p>	
<p><b>assign_charge_from_molecules</b>(<i>molecule, charge_mols</i>)</p> <p>Given an input molecule, checks against a list of molecules for an isomorphic match. If found, assigns partial charges from the match to the input molecule.</p> <p><b>Parameters</b></p> <p><b>molecule</b> [an openforcefield.topology.FrozenMolecule] The molecule to have partial charges assigned if a match is found.</p> <p><b>charge_mols</b> [list of [openforcefield.topology.FrozenMolecule]] A list of molecules with charges already assigned.</p> <p><b>Returns</b></p> <p><b>match_found</b> [bool] Whether a match was found. If True, the input molecule will have been modified in-place.</p>	
<p><b>postprocess_system</b>(<i>system, topology, **kwargs</i>)</p> <p>Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.</p> <p><b>Parameters</b></p> <p><b>topology</b> [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.</p> <p><b>system</b> [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.</p>	
<p><b>property</b> TAGNAME</p> <p>The name of this ParameterHandler corresponding to the SMIRNOFF tag name</p> <p><b>Returns</b></p> <p><b>handler_name</b> [str] The name of this parameter handler</p>	
<p><b>add_cosmetic_attribute</b>(<i>attr_name, attr_value</i>)</p> <p>Add a cosmetic attribute to this object.</p> <p>This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.</p> <div style="border: 1px solid black; padding: 10px; margin-top: 10px;"> <p><b>Warning:</b> The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).</p> </div>	

### Parameters

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(*parameter\_kwargs=None, parameter=None, after=None, before=None*)

Add a parameter to the forcefield, ensuring all parameters are valid.

### Parameters

**parameter\_kwargs: dict, optional** The kwargs to pass to the ParameterHandler.INFO\_TYPE (a ParameterType) constructor

**parameter: ParameterType, optional** A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

### Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```

>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']

```

```

>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}

```

Add a new parameter immediately after the parameter with the smirks `[*:1]=[:2]`

```

>>> bh.add_parameter(param, after='[*:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']

```

**assign\_parameters**(*topology, system*)

Assign parameters for the given Topology to the specified System object.

### Parameters



**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] The attribute name to check

#### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**static check\_charges\_assigned**(*ref\_mol*, *topology*)

Check whether charges have been assigned for a reference molecule.

#### Parameters

**ref\_mol** [openforcefield.topology.Molecule] The molecule to check for having charges assigned

**topology** [openforcefield.topology.Topology] The topology to query for this information

#### Returns

**charges\_assigned** [bool] Whether charges have already been assigned to this molecule

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] Name of the cosmetic attribute to delete.

**find\_matches**(*entity*)

Find the elements of the topology/molecule matched by a parameter type.

#### Parameters

**entity** [openforcefield.topology.Topology] Topology to search.

#### Returns

**matches** [ValenceDict[Tuple[int], ParameterHandler.Match]]  
 matches[particle\_indices] is the ParameterType object matching the tuple of particle indices in entity.

**get\_parameter**(parameter\_attrs)

Return the parameters in this ParameterHandler that match the parameter\_attrs argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

#### Parameters

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[\*:1]~[#16:2]=,:[#6:3]~[:4]", "id": "t105"})

#### Returns

**params** [list of ParameterType objects] A list of matching ParameterType objects

### Examples

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[*:1]-[:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[*:1]-[:2]'})
[<BondType with smirks: [:1]-[:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

#### property known\_kwargs

List of kwargs that can be parsed by the function.

#### mark\_charges\_assigned(ref\_mol, topology)

Record that charges have been assigned for a reference molecule.

#### Parameters

**ref\_mol** [openforcefield.topology.Molecule] The molecule to mark as having charges assigned

**topology** [openforcefield.topology.Topology] The topology to record this information on.

#### property parameters

The ParameterList that holds this ParameterHandler's parameter objects

#### to\_dict(discard\_cosmetic\_attributes=False)

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

#### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

#### Returns

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

### openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler

```
class openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler(allow_cosmetic_attributes=False,
                                                                           skip_version_check=False,
                                                                           **kwargs)
```

Handle SMIRNOFF <LibraryCharges> tags

**Warning:** This API is experimental and subject to change.

#### Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**known\_kwargs** List of kwargs that can be parsed by the function.

**parameters** The ParameterList that holds this ParameterHandler's parameter objects

**version** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value  
converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float

## Methods

<code>LibraryChargeType(**kwargs)</code>	A SMIRNOFF Library Charge type.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_charges_assigned(ref_mol, topology)</code>	Check whether charges have been assigned for a reference molecule.
<code>check_handler_compatibility(handler_kwargs)</code>	Checks if a set of kwargs used to create a ParameterHandler are compatible with this ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>mark_charges_assigned(ref_mol, topology)</code>	Record that charges have been assigned for a reference molecule.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	
<code>create_force</code>	

`__init__(allow_cosmetic_attributes=False, skip_version_check=False, **kwargs)`  
 Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

### Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check**: bool, optional. Default = False If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

## Methods

<code>__init__([allow_cosmetic_attributes, ...])</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_charges_assigned(ref_mol, topology)</code>	Check whether charges have been assigned for a reference molecule.
<code>check_handler_compatibility(handler_kwargs)</code>	Checks if a set of kwargs used to create a ParameterHandler are compatible with this ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the parameter_attrs argument.
<code>mark_charges_assigned(ref_mol, topology)</code>	Record that charges have been assigned for a reference molecule.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

## Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>version</code>	A descriptor for ParameterType attributes.

**class** `LibraryChargeType(**kwargs)`  
A SMIRNOFF Library Charge type.

**Warning:** This API is experimental and subject to change.

## Attributes

**charge** The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as `k1`, `k2`, ..., and `IndexedParameterAttribute` can be used to encapsulate the sequence of terms.

The only substantial difference with `ParameterAttribute` is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [`simtk.unit.Quantity`, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into `Quantity` objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with `ParameterAttribute`, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

**id** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.



```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**name** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
```

(continues on next page)

(continued from previous page)

```
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**parent\_id** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**smirks** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
```

(continues on next page)

(continued from previous page)

```

...     # This converter converts only integers to float
...     # and raise an exception for the other types.
...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

### **`add_cosmetic_attribute(attr_name, attr_value)`**

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**`attr_name`** [str] Name of the attribute to define for this object.

**`attr_value`** [str] The value of the attribute to define for this object.

### **`attribute_is_cosmetic(attr_name)`**

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters****attr\_name** [str] The attribute name to check**Returns****is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).**Parameters****attr\_name** [str] Name of the cosmetic attribute to delete.**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this object to dict format.

The returning dictionary contains all the `ParameterAttribute` and `IndexedParameterAttribute` as well as cosmetic attributes if `discard_cosmetic_attributes` is False.

**Parameters****discard\_cosmetic\_attributes** [bool, optional. Default = False] Whether to discard non-spec attributes of this object**Returns****smirnoff\_dict** [dict] The SMIRNOFF-compliant dict representation of this object.**find\_matches**(*entity*)

Find the elements of the topology/molecule matched by a parameter type.

**Parameters****entity** [openforcefield.topology.Topology] Topology to search.**Returns**

**matches** [ValenceDict[Tuple[int], ParameterHandler.\_Match]]  
**matches**[*particle\_indices*] is the `ParameterType` object matching the tuple of particle indices in *entity*.

**property** TAGNAMEThe name of this `ParameterHandler` corresponding to the SMIRNOFF tag name**Returns****handler\_name** [str] The name of this parameter handler**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).**Parameters**

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(*parameter\_kwargs=None, parameter=None, after=None, before=None*)

Add a parameter to the forcefield, ensuring all parameters are valid.

#### Parameters

**parameter\_kwargs: dict, optional** The kwargs to pass to the ParameterHandler.INFOType (a ParameterType) constructor

**parameter: ParameterType, optional** A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

#### Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks `[:1]=[:2]`

```
>>> bh.add_parameter(param, after='[:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

**assign\_parameters**(*topology, system*)

Assign parameters for the given Topology to the specified System object.

#### Parameters

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.



**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] The attribute name to check

#### Returns

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**static check\_charges\_assigned**(*ref\_mol*, *topology*)

Check whether charges have been assigned for a reference molecule.

#### Parameters

**ref\_mol** [openforcefield.topology.Molecule] The molecule to check for having charges assigned

**topology** [openforcefield.topology.Topology] The topology to query for this information

#### Returns

**charges\_assigned** [bool] Whether charges have already been assigned to this molecule

**check\_handler\_compatibility**(*handler\_kwargs*)

Checks if a set of kwargs used to create a ParameterHandler are compatible with this ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.

#### Parameters

**handler\_kwargs** [dict] The kwargs that would be used to construct

#### Raises

**IncompatibleParameterError** if **handler\_kwargs** are incompatible with existing parameters.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] Name of the cosmetic attribute to delete.

**get\_parameter**(*parameter\_attrs*)

Return the parameters in this ParameterHandler that match the *parameter\_attrs* argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

**Parameters**

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[\*:1]~[#16:2]=,.[#6:3]~[:4]", "id": "t105"})

**Returns**

**params** [list of ParameterType objects] A list of matching ParameterType objects

## Examples

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[*:1]-[:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[*:1]-[:2]'})
[<BondType with smirks: [:1]-[:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

**property known\_kwargs**

List of kwargs that can be parsed by the function.

**mark\_charges\_assigned**(*ref\_mol*, *topology*)

Record that charges have been assigned for a reference molecule.

**Parameters**

**ref\_mol** [openforcefield.topology.Molecule] The molecule to mark as having charges assigned

**topology** [openforcefield.topology.Topology] The topology to record this information on.

**property parameters**

The ParameterList that holds this ParameterHandler's parameter objects

**postprocess\_system**(*topology*, *system*, *\*\*kwargs*)

Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**to\_dict**(*discard\_cosmetic\_attributes=False*)

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

#### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

#### Returns

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

### openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler

```
class openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler(allow_cosmetic_attributes=False,  
                                                                           skip_version_check=False,  
                                                                           **kwargs)
```

Handle SMIRNOFF <ToolkitAM1BCC> tags

**Warning:** This API is experimental and subject to change.

#### Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**known\_kwargs** List of kwargs that can be parsed by the function.

**parameters** The ParameterList that holds this ParameterHandler's parameter objects

**version** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value    converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

attr\_all\_to\_float accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
```

(continues on next page)

(continued from previous page)

```
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_charges_assigned(ref_mol, topology)</code>	Check whether charges have been assigned for a reference molecule.
<code>check_handler_compatibility(other_handler[, ...])</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>mark_charges_assigned(ref_mol, topology)</code>	Record that charges have been assigned for a reference molecule.
<code>postprocess_system(system, topology, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

<b>assign_partial_bond_orders_from_molecules</b>	
<b>check_partial_bond_orders_from_molecules_duplicates</b>	
<b>create_force</b>	

**\_\_init\_\_**(*allow\_cosmetic\_attributes=False, skip\_version\_check=False, \*\*kwargs*)

Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

## Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check**: **bool, optional. Default = False** If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

## Methods

<code>__init__([allow_cosmetic_attributes, ...])</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_charges_assigned(ref_mol, topology)</code>	Check whether charges have been assigned for a reference molecule.
<code>check_handler_compatibility(other_handler, ...)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>mark_charges_assigned(ref_mol, topology)</code>	Record that charges have been assigned for a reference molecule.
<code>postprocess_system(system, topology, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

## Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>version</code>	A descriptor for ParameterType attributes.

**check\_handler\_compatibility**(*other\_handler*, *assume\_missing\_is\_default=True*)

Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.

This is called if a second handler is attempted to be initialized for the same tag.

#### Parameters

**other\_handler** [a ParameterHandler object] The handler to compare to.

#### Raises

**IncompatibleParameterError** if **handler\_kwargs** are incompatible with existing parameters.

**postprocess\_system**(*system*, *topology*, *\*\*kwargs*)

Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

#### Parameters

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**property** TAGNAME

The name of this ParameterHandler corresponding to the SMIRNOFF tag name

#### Returns

**handler\_name** [str] The name of this parameter handler

**add\_cosmetic\_attribute**(*attr\_name*, *attr\_value*)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

#### Parameters

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(*parameter\_kwargs=None*, *parameter=None*, *after=None*, *before=None*)

Add a parameter to the forcefield, ensuring all parameters are valid.

#### Parameters

**parameter\_kwargs: dict, optional** The kwargs to pass to the ParameterHandler.INFO\_TYPE (a ParameterType) constructor

**parameter: ParameterType, optional** A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

Note that one of (`parameter_kwargs`, `parameter`) must be specified

Note that when ``before`` and ``after`` are both `None`, the new parameter will be appended to the END of the parameter list.

Note that when ``before`` and ``after`` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.

## Examples

Add a `ParameterType` to an existing `ParameterList` at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[*:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[*:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[*:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks ``[:1]=[:2]``

```
>>> bh.add_parameter(param, after='[*:1]=[*:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

## `assign_parameters(topology, system)`

Assign parameters for the given `Topology` to the specified `System` object.

### Parameters

**topology** [`openforcefield.topology.Topology`] The `Topology` for which parameters are to be assigned. Either a new `Force` will be created or parameters will be appended to an existing `Force`.

**system** [`simtk.openmm.System`] The `OpenMM` `System` object to add the `Force` (or append new parameters) to.

## `attribute_is_cosmetic(attr_name)`

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [`str`] The attribute name to check

### Returns

**is\_cosmetic** [`bool`] Returns `True` if the attribute is defined and is cosmetic. Returns `False` otherwise.



**static** `check_charges_assigned(ref_mol, topology)`

Check whether charges have been assigned for a reference molecule.

**Parameters**

**ref\_mol** [openforcefield.topology.Molecule] The molecule to check for having charges assigned

**topology** [openforcefield.topology.Topology] The topology to query for this information

**Returns**

**charges\_assigned** [bool] Whether charges have already been assigned to this molecule

**delete\_cosmetic\_attribute(attr\_name)**

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**find\_matches(entity)**

Find the elements of the topology/molecule matched by a parameter type.

**Parameters**

**entity** [openforcefield.topology.Topology] Topology to search.

**Returns**

**matches** [ValenceDict[Tuple[int], ParameterHandler.\_Match]]  
 matches[particle\_indices] is the ParameterType object matching the tuple of particle indices in entity.

**get\_parameter(parameter\_attrs)**

Return the parameters in this ParameterHandler that match the parameter\_attrs argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

**Parameters**

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[1]~[#16:2]=,.[#6:3]~[:4]", "id": "t105"})

**Returns**

**params** [list of ParameterType objects] A list of matching ParameterType objects

## Examples

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[:1]-[:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[:1]-[:2]'})
[<BondType with smirks: [:1]-[:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

### property known\_kwargs

List of kwargs that can be parsed by the function.

### mark\_charges\_assigned(ref\_mol, topology)

Record that charges have been assigned for a reference molecule.

#### Parameters

**ref\_mol** [openforcefield.topology.Molecule] The molecule to mark as having charges assigned

**topology** [openforcefield.topology.Topology] The topology to record this information on.

### property parameters

The ParameterList that holds this ParameterHandler's parameter objects

### to\_dict(discard\_cosmetic\_attributes=False)

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

#### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

#### Returns

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

## openforcefield.typing.engines.smirnoff.parameters.GBSAHandler

```
class openforcefield.typing.engines.smirnoff.parameters.GBSAHandler(allow_cosmetic_attributes=False,
                                                                    skip_version_check=False,
                                                                    **kwargs)
```

Handle SMIRNOFF <GBSA> tags

**Warning:** This API is experimental and subject to change.

## Attributes

**TAGNAME** The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**gb\_model** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
```

(continues on next page)

(continued from previous page)

```
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**known\_kwargs** List of kwargs that can be parsed by the function.

**parameters** The `ParameterList` that holds this `ParameterHandler`'s parameter objects

**sa\_model** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
```

(continues on next page)

(continued from previous page)

```

...     if isinstance(value, int):
...         return float(value)
...     elif not isinstance(value, float):
...         raise TypeError(f"Cannot convert '{value}' to float")
...     return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

**solute\_dielectric** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()

```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**solvent\_dielectric** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
```

(continues on next page)



(continued from previous page)

```
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

**solvent\_radius** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**surface\_area\_penalty** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

```
converter(value): -> converted_value
converter(instance, parameter_attribute, value): -> converted_value
```

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3` `>>> my_par.attr_int_to_float 3.0` `>>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float

**version** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0'` Traceback (most recent call last): ... `TypeError: Cannot convert '4.0' to float`

## Methods

<code>GBSAType(smirks[, allow_cosmetic_attributes])</code>	A SMIRNOFF GBSA type.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

continues on next page

Table 105 – continued from previous page

<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.
---	--

<code>assign_partial_bond_orders_from_molecules</code>	
<code>check_partial_bond_orders_from_molecules_duplicates</code>	
<code>create_force</code>	

`__init__(allow_cosmetic_attributes=False, skip_version_check=False, **kwargs)`  
 Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.

#### Parameters

**allow\_cosmetic\_attributes** [bool, optional. Default = False] Whether to permit non-spec kwargs. If True, non-spec kwargs will be stored as attributes of this object and can be accessed and modified. Otherwise an exception will be raised if a non-spec kwarg is encountered.

**skip\_version\_check: bool, optional. Default = False** If False, the SMIRNOFF section version will not be checked, and the ParameterHandler will be initialized with version set to `_MAX_SUPPORTED_SECTION_VERSION`.

**\*\*kwargs** [dict] The dict representation of the SMIRNOFF data source

#### Methods

<code>__init__([allow_cosmetic_attributes, ...])</code>	Initialize a ParameterHandler, optionally with a list of parameters and other kwargs.
<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>add_parameter([parameter_kwargs, parameter, ...])</code>	Add a parameter to the forcefield, ensuring all parameters are valid.
<code>assign_parameters(topology, system)</code>	Assign parameters for the given Topology to the specified System object.
<code>assign_partial_bond_orders_from_molecules(...)</code>	
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>check_handler_compatibility(other_handler)</code>	Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler.
<code>check_partial_bond_orders_from_molecules_duplicates(pb_mols)</code>	
<code>create_force(system, topology, **kwargs)</code>	
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>find_matches(entity)</code>	Find the elements of the topology/molecule matched by a parameter type.
<code>get_parameter(parameter_attrs)</code>	Return the parameters in this ParameterHandler that match the <code>parameter_attrs</code> argument.
<code>postprocess_system(topology, system, **kwargs)</code>	Allow the force to perform a a final post-processing pass on the System following parameter assignment, if needed.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this ParameterHandler to an Ordered-Dict, compliant with the SMIRNOFF data spec.

## Attributes

<code>TAGNAME</code>	The name of this ParameterHandler corresponding to the SMIRNOFF tag name
<code>gb_model</code>	A descriptor for ParameterType attributes.
<code>known_kwargs</code>	List of kwargs that can be parsed by the function.
<code>parameters</code>	The ParameterList that holds this ParameterHandler's parameter objects
<code>sa_model</code>	A descriptor for ParameterType attributes.
<code>solute_dielectric</code>	A descriptor for ParameterType attributes.
<code>solvent_dielectric</code>	A descriptor for ParameterType attributes.
<code>solvent_radius</code>	A descriptor for ParameterType attributes.
<code>surface_area_penalty</code>	A descriptor for ParameterType attributes.
<code>version</code>	A descriptor for ParameterType attributes.

**class** `GBSAType`(*smirks*, *allow\_cosmetic\_attributes*=False, *\*\*kwargs*)  
A SMIRNOFF GBSA type.

**Warning:** This API is experimental and subject to change.

## Attributes

**id** A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
```

(continues on next page)



(continued from previous page)

```
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**parent\_id** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
```

(continues on next page)

(continued from previous page)

```

>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom

```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**radius** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
```

(continues on next page)

(continued from previous page)

```

...         raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**scale** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have `None` as a default value, required attributes have the default set to the special type `UNDEFINED`.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a `Quantity`.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```

>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()

```

Even without explicit assignment, the default value is returned.

```

>>> my_par.attr_optional
2

```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

`attr_all_to_float` accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

**smirks** A descriptor for `ParameterType` attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

`converter(value): -> converted_value` `converter(instance, parameter_attribute, value): -> converted_value`

A decorator syntax is available (see example below).

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

**IndexedParameterAttribute** A parameter attribute with multiple terms.

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:
...     attr_required = ParameterAttribute()
...     attr_optional = ParameterAttribute(default=2)
...
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required
Traceback (most recent call last):
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0_
↳ dimensionless should have units of angstrom
```

You can attach a custom converter to an attribute.

```

>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()

```

`attr_all_to_float` accepts and convert to float both strings and integers

```

>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0

```

The custom converter associated to `attr_int_to_float` converts only integers instead. `>>> my_par.attr_int_to_float = 3 >>> my_par.attr_int_to_float 3.0 >>> my_par.attr_int_to_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float`

## Methods

<code>add_cosmetic_attribute(attr_name, attr_value)</code>	Add a cosmetic attribute to this object.
<code>attribute_is_cosmetic(attr_name)</code>	Determine whether an attribute of this object is cosmetic.
<code>delete_cosmetic_attribute(attr_name)</code>	Delete a cosmetic attribute from this object.
<code>to_dict([discard_cosmetic_attributes])</code>	Convert this object to dict format.

**add\_cosmetic\_attribute(attr\_name, attr\_value)**

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

## Parameters

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**attribute\_is\_cosmetic(attr\_name)**



Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] The attribute name to check

**Returns**

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(attr\_name)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**to\_dict**(discard\_cosmetic\_attributes=False)

Convert this object to dict format.

The returning dictionary contains all the ParameterAttribute and IndexedParameterAttribute as well as cosmetic attributes if discard\_cosmetic\_attributes is False.

**Parameters**

**discard\_cosmetic\_attributes** [bool, optional. Default = False] Whether to discard non-spec attributes of this object

**Returns**

**smirnoff\_dict** [dict] The SMIRNOFF-compliant dict representation of this object.

**check\_handler\_compatibility**(other\_handler)

Checks whether this ParameterHandler encodes compatible physics as another ParameterHandler. This is called if a second handler is attempted to be initialized for the same tag.

**Parameters**

**other\_handler** [a ParameterHandler object] The handler to compare to.

**Raises**

**IncompatibleParameterError** if handler\_kwargs are incompatible with existing parameters.

**property** TAGNAME

The name of this ParameterHandler corresponding to the SMIRNOFF tag name

**Returns**

**handler\_name** [str] The name of this parameter handler

**add\_cosmetic\_attribute**(attr\_name, attr\_value)

Add a cosmetic attribute to this object.

This attribute will not have a functional effect on the object in the Open Force Field toolkit, but can be written out during output.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

### Parameters

**attr\_name** [str] Name of the attribute to define for this object.

**attr\_value** [str] The value of the attribute to define for this object.

**add\_parameter**(*parameter\_kwargs=None, parameter=None, after=None, before=None*)

Add a parameter to the forcefield, ensuring all parameters are valid.

### Parameters

**parameter\_kwargs:** dict, optional The kwargs to pass to the ParameterHandler.INFO\_TYPE (a ParameterType) constructor

**parameter:** ParameterType, optional A ParameterType to add to the ParameterHandler

**after** [str or int, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly before where the new parameter will be added

**before** [str, optional] The SMIRKS pattern (if str) or index (if int) of the parameter directly after where the new parameter will be added

**Note that one of (parameter\_kwargs, parameter) must be specified**

**Note that when `before` and `after` are both None, the new parameter will be appended to the END of the parameter list.**

**Note that when `before` and `after` are both specified, the new parameter will be added immediately after the parameter matching the *after* pattern or index.**

### Examples

Add a ParameterType to an existing ParameterList at a specified position.

Given an existing parameter handler and a new parameter to add to it:

```
>>> from simtk import unit
>>> bh = BondHandler(skip_version_check=True)
>>> length = 1.5 * unit.angstrom
>>> k = 100 * unit.kilocalorie_per_mole / unit.angstrom ** 2
>>> bh.add_parameter({'smirks': '[*:1]-[*:2]', 'length': length, 'k': k, 'id': 'b1'})
>>> bh.add_parameter({'smirks': '[*:1]=[*:2]', 'length': length, 'k': k, 'id': 'b2'})
>>> bh.add_parameter({'smirks': '[*:1]#[*:2]', 'length': length, 'k': k, 'id': 'b3'})
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b3']
```

```
>>> param = {'smirks': '[#1:1]-[#6:2]', 'length': length, 'k': k, 'id': 'b4'}
```

Add a new parameter immediately after the parameter with the smirks `[:1]=[:2]`

```
>>> bh.add_parameter(param, after='[:1]=[:2]')
>>> [p.id for p in bh.parameters]
['b1', 'b2', 'b4', 'b3']
```

**assign\_parameters**(*topology*, *system*)

Assign parameters for the given Topology to the specified System object.

**Parameters**

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

**attribute\_is\_cosmetic**(*attr\_name*)

Determine whether an attribute of this object is cosmetic.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] The attribute name to check

**Returns**

**is\_cosmetic** [bool] Returns True if the attribute is defined and is cosmetic. Returns False otherwise.

**delete\_cosmetic\_attribute**(*attr\_name*)

Delete a cosmetic attribute from this object.

**Warning:** The API for modifying cosmetic attributes is experimental and may change in the future (see issue #338).

**Parameters**

**attr\_name** [str] Name of the cosmetic attribute to delete.

**find\_matches**(*entity*)

Find the elements of the topology/molecule matched by a parameter type.

**Parameters**

**entity** [openforcefield.topology.Topology] Topology to search.

**Returns**

**matches** [ValenceDict[Tuple[int], ParameterHandler.\_Match]]  
 matches[particle\_indices] is the ParameterType object matching the tuple of particle indices in entity.

**get\_parameter**(*parameter\_attrs*)

Return the parameters in this ParameterHandler that match the parameter\_attrs argument. When multiple attrs are passed, parameters that have any (not all) matching attributes are returned.

**Parameters**

**parameter\_attrs** [dict of {attr: value}] The attrs mapped to desired values (for example {"smirks": "[\*:1]~[#16:2]=,:[#6:3]~[:4]", "id": "t105"})

### Returns

**params** [list of ParameterType objects] A list of matching ParameterType objects

### Examples

Create a parameter handler and populate it with some data.

```
>>> from simtk import unit
>>> handler = BondHandler(skip_version_check=True)
>>> handler.add_parameter(
...     {
...         'smirks': '[:1]-[:2]',
...         'length': 1*unit.angstrom,
...         'k': 10*unit.kilocalorie_per_mole/unit.angstrom**2,
...     }
... )
```

Look up, from this handler, all parameters matching some SMIRKS pattern

```
>>> handler.get_parameter({'smirks': '[:1]-[:2]'})
[<BondType with smirks: [:1]-[:2] length: 1 A k: 10 kcal/(A**2 mol) >]
```

### property known\_kwargs

List of kwargs that can be parsed by the function.

### property parameters

The ParameterList that holds this ParameterHandler's parameter objects

### postprocess\_system(topology, system, \*\*kwargs)

Allow the force to perform a final post-processing pass on the System following parameter assignment, if needed.

### Parameters

**topology** [openforcefield.topology.Topology] The Topology for which parameters are to be assigned. Either a new Force will be created or parameters will be appended to an existing Force.

**system** [simtk.openmm.System] The OpenMM System object to add the Force (or append new parameters) to.

### to\_dict(discard\_cosmetic\_attributes=False)

Convert this ParameterHandler to an OrderedDict, compliant with the SMIRNOFF data spec.

### Parameters

**discard\_cosmetic\_attributes** [bool, optional. Default = False.] Whether to discard non-spec parameter and header attributes in this ParameterHandler.

### Returns

**smirnoff\_data** [OrderedDict] SMIRNOFF-spec compliant representation of this ParameterHandler and its internal ParameterList.

## Parameter I/O Handlers

ParameterIOHandler objects handle reading and writing of serialized SMIRNOFF data sources.

<code>ParameterIOHandler</code>	Base class for handling serialization/deserialization of SMIRNOFF ForceField objects
<code>XMLParameterIOHandler</code>	Handles serialization/deserialization of SMIRNOFF ForceField objects from OFFXML format.

### openforcefield.typing.engines.smirnoff.io.ParameterIOHandler

**class** openforcefield.typing.engines.smirnoff.io.**ParameterIOHandler**

Base class for handling serialization/deserialization of SMIRNOFF ForceField objects

#### Methods

<code>parse_file(file_path)</code>	<b>Parameters</b>
<code>parse_string(data)</code>	Parse a SMIRNOFF force field definition in a serialized format
<code>to_file(file_path, smirnoff_data)</code>	Write the current forcefield parameter set to a file.
<code>to_string(smirnoff_data)</code>	Render the forcefield parameter set to a string

`__init__()`

Create a new ParameterIOHandler.

#### Methods

<code>__init__()</code>	Create a new ParameterIOHandler.
<code>parse_file(file_path)</code>	<b>Parameters</b>
<code>parse_string(data)</code>	Parse a SMIRNOFF force field definition in a serialized format
<code>to_file(file_path, smirnoff_data)</code>	Write the current forcefield parameter set to a file.
<code>to_string(smirnoff_data)</code>	Render the forcefield parameter set to a string

`parse_file(file_path)`

**Parameters**

`file_path`

`parse_string(data)`

Parse a SMIRNOFF force field definition in a serialized format

**Parameters**

**data****to\_file**(*file\_path*, *smirnoff\_data*)

Write the current forcefield parameter set to a file.

**Parameters****file\_path** [str] The path to the file to write to.**smirnoff\_data** [dict] A dictionary structured in compliance with the SMIRNOFF spec**to\_string**(*smirnoff\_data*)

Render the forcefield parameter set to a string

**Parameters****smirnoff\_data** [dict] A dictionary structured in compliance with the SMIRNOFF spec**Returns****str****openforcefield.typing.engines.smirnoff.io.XMLParameterIOHandler****class** openforcefield.typing.engines.smirnoff.io.XMLParameterIOHandler

Handles serialization/deserialization of SMIRNOFF ForceField objects from OFFXML format.

**Methods**

<code>parse_file(source)</code>	Parse a SMIRNOFF force field definition in XML format, read from a file.
<code>parse_string(data)</code>	Parse a SMIRNOFF force field definition in XML format.
<code>to_file(file_path, smirnoff_data)</code>	Write the current forcefield parameter set to a file.
<code>to_string(smirnoff_data)</code>	Write the current forcefield parameter set to an XML string.

**\_\_init\_\_**()

Create a new ParameterIOHandler.

**Methods**

<code>__init__()</code>	Create a new ParameterIOHandler.
<code>parse_file(source)</code>	Parse a SMIRNOFF force field definition in XML format, read from a file.
<code>parse_string(data)</code>	Parse a SMIRNOFF force field definition in XML format.
<code>to_file(file_path, smirnoff_data)</code>	Write the current forcefield parameter set to a file.
<code>to_string(smirnoff_data)</code>	Write the current forcefield parameter set to an XML string.

**parse\_file**(*source*)

Parse a SMIRNOFF force field definition in XML format, read from a file.

#### Parameters

**source** [str or io.RawIOBase] File path of file-like object implementing a `read()` method specifying a SMIRNOFF force field definition in [the SMIRNOFF XML format](#).

#### Raises

**ParseError** If the XML cannot be processed.

**FileNotFoundError** If the file could not found.

#### `parse_string(data)`

Parse a SMIRNOFF force field definition in XML format.

A `ParseError` is raised if the XML cannot be processed.

#### Parameters

**data** [str] A SMIRNOFF force field definition in [the SMIRNOFF XML format](#).

#### `to_file(file_path, smirnoff_data)`

Write the current forcefield parameter set to a file.

#### Parameters

**file\_path** [str] The path to the file to be written. The `.offxml` or `.xml` file extension must be present.

**smirnoff\_data** [dict] A dict structured in compliance with the SMIRNOFF data spec.

#### `to_string(smirnoff_data)`

Write the current forcefield parameter set to an XML string.

#### Parameters

**smirnoff\_data** [dict] A dictionary structured in compliance with the SMIRNOFF spec

#### Returns

**serialized\_forcefield** [str] XML String representation of this forcefield.

## Parameter Attributes

`ParameterAttribute` and `IndexedParameterAttribute` provide a standard backend for `ParameterHandler` and `Parameter` attributes, while also enforcing validation of types and units.

<code>ParameterAttribute</code>	A descriptor for <code>ParameterType</code> attributes.
<code>IndexedParameterAttribute</code>	The attribute of a parameter with an unspecified number of terms.
<code>MappedParameterAttribute</code>	The attribute of a parameter in which each term is a mapping.
<code>IndexedMappedParameterAttribute</code>	The attribute of a parameter with an unspecified number of terms, where each term is a mapping.

## openforcefield.typing.engines.smirnoff.parameters.ParameterAttribute

```
class openforcefield.typing.engines.smirnoff.parameters.ParameterAttribute(default=<class  
                                'openforce-  
                                field.typing.engines.smirnoff.parameters  
                                unit=None,  
                                con-  
                                verter=None>)
```

A descriptor for ParameterType attributes.

The descriptors allows associating to the parameter a default value, which makes the attribute optional, a unit, and a custom converter.

Because we may want to have None as a default value, required attributes have the default set to the special type UNDEFINED.

Converters can be both static or instance functions/methods with respective signatures

converter(value): -> converted\_value converter(instance, parameter\_attribute, value): -> converted\_value

A decorator syntax is available (see example below).

### Parameters

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only quantities with compatible units are allowed to be set, and string expressions are automatically parsed into a Quantity.

**converter** [callable, optional] An optional function that can be used to convert values before setting the attribute.

See also:

**IndexedParameterAttribute** A parameter attribute with multiple terms.

### Examples

Create a parameter type with an optional and a required attribute.

```
>>> class MyParameter:  
...     attr_required = ParameterAttribute()  
...     attr_optional = ParameterAttribute(default=2)  
...  
>>> my_par = MyParameter()
```

Even without explicit assignment, the default value is returned.

```
>>> my_par.attr_optional  
2
```

If you try to access an attribute without setting it first, an exception is raised.

```
>>> my_par.attr_required  
Traceback (most recent call last):
```

(continues on next page)



(continued from previous page)

```
...
AttributeError: 'MyParameter' object has no attribute '_attr_required'
```

The attribute allow automatic conversion and validation of units.

```
>>> from simtk import unit
>>> class MyParameter:
...     attr_quantity = ParameterAttribute(unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.attr_quantity = '1.0 * nanometer'
>>> my_par.attr_quantity
Quantity(value=1.0, unit=nanometer)
>>> my_par.attr_quantity = 3.0
Traceback (most recent call last):
...
openforcefield.utils.utils.IncompatibleUnitError: attr_quantity=3.0 dimensionless should have_
↳units of angstrom
```

You can attach a custom converter to an attribute.

```
>>> class MyParameter:
...     # Both strings and integers convert nicely to floats with float().
...     attr_all_to_float = ParameterAttribute(converter=float)
...     attr_int_to_float = ParameterAttribute()
...     @attr_int_to_float.converter
...     def attr_int_to_float(self, attr, value):
...         # This converter converts only integers to float
...         # and raise an exception for the other types.
...         if isinstance(value, int):
...             return float(value)
...         elif not isinstance(value, float):
...             raise TypeError(f"Cannot convert '{value}' to float")
...         return value
...
>>> my_par = MyParameter()
```

attr\_all\_to\_float accepts and convert to float both strings and integers

```
>>> my_par.attr_all_to_float = 1
>>> my_par.attr_all_to_float
1.0
>>> my_par.attr_all_to_float = '2.0'
>>> my_par.attr_all_to_float
2.0
```

The custom converter associated to attr\_int\_to\_float converts only integers instead. >>> my\_par.attr\_int\_to\_float = 3 >>> my\_par.attr\_int\_to\_float 3.0 >>> my\_par.attr\_int\_to\_float = '4.0' Traceback (most recent call last): ... TypeError: Cannot convert '4.0' to float

## Attributes

name

## Methods

<code>UNDEFINED()</code>	Custom type used by <code>ParameterAttribute</code> to differentiate between <code>None</code> and undeclared default.
<code>converter(converter)</code>	Create a new <code>ParameterAttribute</code> with an associated converter.

`__init__`(*default*=<class 'openforcefield.typing.engines.smirnoff.parameters.ParameterAttribute.UNDEFINED'>, *unit*=None, *converter*=None)  
Initialize self. See `help(type(self))` for accurate signature.

## Methods

<code>__init__</code> ([ <i>default</i> , <i>unit</i> , <i>converter</i> ])	Initialize self.
<code>converter</code> ( <i>converter</i> )	Create a new <code>ParameterAttribute</code> with an associated converter.

## Attributes

<code>name</code>
-------------------

**class** `UNDEFINED`  
Custom type used by `ParameterAttribute` to differentiate between `None` and undeclared default.

**converter**(*converter*)  
Create a new `ParameterAttribute` with an associated converter.  
This is meant to be used as a decorator (see main examples).

## openforcefield.typing.engines.smirnoff.parameters.IndexedParameterAttribute

**class** `openforcefield.typing.engines.smirnoff.parameters.IndexedParameterAttribute`(*default*=<class 'openforcefield.typing.engines.smirnoff.parameters.ParameterAttribute.UNDEFINED'>, *unit*=None, *converter*=None)

The attribute of a parameter with an unspecified number of terms.

Some parameters can be associated to multiple terms, For example, torsions have parameters such as `k1`, `k2`, ..., and `IndexedParameterAttribute` can be used to encapsulate the sequence of terms.

The only substantial difference with `ParameterAttribute` is that only sequences are supported as values and converters and units are checked on each element of the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

## Parameters

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each element of the sequence before setting the attribute.

See also:

**ParameterAttribute** A simple parameter attribute.

**MappedParameterAttribute** A parameter attribute representing a mapping.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

## Examples

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = ['1 * angstrom', 0.5 * unit.nanometer]
>>> my_par.length[0]
Quantity(value=1, unit=angstrom)
```

Similarly, custom converters work as with ParameterAttribute, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [1, '1.0', '1e-2', 4.0]
>>> my_par.attr_indexed
[1.0, 1.0, 0.01, 4.0]
```

## Attributes

**name**

## Methods

<code>UNDEFINED()</code>	Custom type used by <code>ParameterAttribute</code> to differentiate between <code>None</code> and undeclared default.
<code>converter(converter)</code>	Create a new <code>ParameterAttribute</code> with an associated converter.

`__init__`(default=<class 'openforcefield.typing.engines.smirnoff.parameters.ParameterAttribute.UNDEFINED'>, unit=None, converter=None)  
Initialize self. See `help(type(self))` for accurate signature.

## Methods

<code>__init__</code> ([default, unit, converter])	Initialize self.
<code>converter</code> (converter)	Create a new <code>ParameterAttribute</code> with an associated converter.

## Attributes

name
------

**class** `UNDEFINED`  
Custom type used by `ParameterAttribute` to differentiate between `None` and undeclared default.

**converter**(converter)  
Create a new `ParameterAttribute` with an associated converter.  
This is meant to be used as a decorator (see main examples).

## `openforcefield.typing.engines.smirnoff.parameters.MappedParameterAttribute`

**class** `openforcefield.typing.engines.smirnoff.parameters.MappedParameterAttribute`(default=<class 'openforcefield.typing.engines.smirnoff.parameters.MappedParameterAttribute.UNDEFINED'>, unit=None, converter=None)

The attribute of a parameter in which each term is a mapping.

The substantial difference with `IndexedParameterAttribute` is that, unlike indexing, the mapping can be based on arbitrary references, like indices but can starting at non-zero values and include non-adjacent keys.

### Parameters

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [`simtk.unit.Quantity`, optional] When specified, only sequences of mappings where values are quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each component of each element of the sequence before setting the attribute.

See also:

**IndexedParameterAttribute** A parameter attribute representing a sequence.

**IndexedMappedParameterAttribute** A parameter attribute representing a sequence, each term of which is a mapping.

## Examples

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = MappedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Like other ParameterAttribute objects, strings are parsed into Quantity objects.

```
>>> my_par.length = {1: '1.5 * angstrom', 2: '1.4 * angstrom'}
>>> my_par.length[1]
Quantity(value=1.5, unit=angstrom)
```

Unlike other ParameterAttribute objects, the reference points can do not need ot be zero-indexed, non-adjacent, such as interpolating defining a bond parameter for interpolation by defining references values and bond orders 2 and 3:

```
>>> my_par.length = {2: '1.42 * angstrom', 3: '1.35 * angstrom'}
>>> my_par.length[2]
Quantity(value=1.42, unit=angstrom)
```

## Attributes

**name**

## Methods

<code>UNDEFINED()</code>	Custom type used by ParameterAttribute to differentiate between None and undeclared default.
<code>converter(converter)</code>	Create a new ParameterAttribute with an associated converter.

`__init__(default=<class 'openforcefield.typing.engines.smirnoff.parameters.ParameterAttribute.UNDEFINED'>, unit=None, converter=None)`  
Initialize self. See help(type(self)) for accurate signature.

## Methods

<code>__init__</code> ([default, unit, converter])	Initialize self.
<code>converter</code> (converter)	Create a new ParameterAttribute with an associated converter.

## Attributes

<code>name</code>
-------------------

### **class** UNDEFINED

Custom type used by ParameterAttribute to differentiate between None and undeclared default.

### **converter**(converter)

Create a new ParameterAttribute with an associated converter.

This is meant to be used as a decorator (see main examples).

## openforcefield.typing.engines.smirnoff.parameters.IndexedMappedParameterAttribute

```
class openforcefield.typing.engines.smirnoff.parameters.IndexedMappedParameterAttribute(default=<class
                                                                                       'open-
                                                                                       force-
                                                                                       field.typing.engines.smir
                                                                                       unit=None,
                                                                                       con-
                                                                                       verter=None)
```

The attribute of a parameter with an unspecified number of terms, where each term is a mapping.

Some parameters can be associated to multiple terms, where those terms have multiple components. For example, torsions with fractional bond orders have parameters such as `k1_bondorder1`, `k1_bondorder2`, `k2_bondorder1`, `k2_bondorder2`, ..., and `IndexedMappedParameterAttribute` can be used to encapsulate the sequence of terms as mappings (typically, `'dict's`) of their components.

The only substantial difference with `IndexedParameterAttribute` is that only sequences of mappings are supported as values and converters and units are checked on each component of each element in the sequence.

Currently, the descriptor makes the sequence immutable. This is to avoid that an element of the sequence could be set without being properly validated. In the future, the data could be wrapped in a safe list that would safely allow mutability.

### Parameters

**default** [object, optional] When specified, the descriptor makes this attribute optional by attaching a default value to it.

**unit** [simtk.unit.Quantity, optional] When specified, only sequences of mappings where values are quantities with compatible units are allowed to be set.

**converter** [callable, optional] An optional function that can be used to validate and cast each component of each element of the sequence before setting the attribute.

See also:

**IndexedParameterAttribute** A parameter attribute representing a sequence.

**MappedParameterAttribute** A parameter attribute representing a mapping.

## Examples

Create an optional indexed attribute with unit of angstrom.

```
>>> from simtk import unit
>>> class MyParameter:
...     length = IndexedMappedParameterAttribute(default=None, unit=unit.angstrom)
...
>>> my_par = MyParameter()
>>> my_par.length is None
True
```

Strings are parsed into Quantity objects.

```
>>> my_par.length = [{1: '1 * angstrom'}, {1: 0.5 * unit.nanometer}]
>>> my_par.length[0]
{1: Quantity(value=1, unit=angstrom)}
```

Similarly, custom converters work as with ParameterAttribute, but they are used to validate each value in the sequence.

```
>>> class MyParameter:
...     attr_indexed = IndexedMappedParameterAttribute(converter=float)
...
>>> my_par = MyParameter()
>>> my_par.attr_indexed = [{1: 1}, {2: '1.0'}, {3: '1e-2'}, {4: 4.0}]
>>> my_par.attr_indexed
[{1: 1.0}, {2: 1.0, 3: 0.01}, {4: 4.0}]
```

## Attributes

**name**

## Methods

<code>UNDEFINED()</code>	Custom type used by ParameterAttribute to differentiate between None and undeclared default.
<code>converter(converter)</code>	Create a new ParameterAttribute with an associated converter.

**\_\_init\_\_**(default=<class 'openforcefield.typing.engines.smirnoff.parameters.ParameterAttribute.UNDEFINED'>, unit=None, converter=None)  
Initialize self. See help(type(self)) for accurate signature.

## Methods

<code>__init__([default, unit, converter])</code>	Initialize self.
<code>converter(converter)</code>	Create a new ParameterAttribute with an associated converter.

## Attributes

<code>name</code>
-------------------

### **class UNDEFINED**

Custom type used by ParameterAttribute to differentiate between None and undeclared default.

### **converter(converter)**

Create a new ParameterAttribute with an associated converter.

This is meant to be used as a decorator (see main examples).

## 2.3 Utilities

### 2.3.1 Toolkit wrappers

The toolkit wrappers provide a simple uniform API for accessing minimal functionality of cheminformatics toolkits.

These toolkit wrappers are generally used through a ToolkitRegistry, which can be constructed with a desired precedence of toolkits:

```
>>> from openforcefield.utils.toolkits import ToolkitRegistry, OpenEyeToolkitWrapper, \
↳ RDKitToolkitWrapper, AmberToolsToolkitWrapper
>>> toolkit_registry = ToolkitRegistry()
>>> toolkit_precedence = [OpenEyeToolkitWrapper, RDKitToolkitWrapper, AmberToolsToolkitWrapper]
>>> [ toolkit_registry.register_toolkit(toolkit) for toolkit in toolkit_precedence if toolkit.is_
↳ available() ]
[None, None, None]
```

The toolkit wrappers can then be accessed through the registry:

```
>>> from openforcefield.utils.toolkits import GLOBAL_TOOLKIT_REGISTRY as toolkit_registry
>>> from openforcefield.topology.molecule import Molecule
>>> molecule = Molecule.from_smiles('Cc1ccccc1')
>>> smiles = toolkit_registry.call('to_smiles', molecule)
```

The order of toolkits, as specified in `toolkit_precedence` above, determines the order in which the called method is resolved, i.e. if the toolkit with highest precedence has a `to_smiles` method, that is the toolkit that will be called. If the toolkit with highest precedence does not have such a method, it is attempted with other toolkits until one is found. By default, if a toolkit with an appropriately-named method raises an exception of any type, then iteration over the registered toolkits stops and that exception is raised. To continue iteration if specific exceptions are encountered, customize this behavior using the optional `raise_exception_types` keyword argument to `ToolkitRegistry.call`. If no registered toolkits have the method, a `ValueError` is raised, containing a message listing the registered toolkits and exceptions (if any) that were ignored.

Alternatively, the global toolkit registry (which will attempt to register any available toolkits) can be used:



```
>>> from openforcefield.utils.toolkits import GLOBAL_TOOLKIT_REGISTRY as toolkit_registry
>>> len(toolkit_registry.registered_toolkits)
4
```

Individual toolkits can be registered or deregistered to control the backend that ToolkitRegistry calls resolve to. This can be useful for debugging and exploring subtly different behavior between toolkit wrappers.

```
from openforcefield.utils.toolkits import OpenEyeToolkitWrapper, BuiltInToolkitWrapper
from openforcefield.utils.toolkits import GLOBAL_TOOLKIT_REGISTRY as toolkit_registry
toolkit_registry.deregister_toolkit(OpenEyeToolkitWrapper)
toolkit_registry.register_toolkit(BuiltInToolkitWrapper)
toolkit_registry.registered_toolkits
```

For example, differences in to\_smiles functionality between OpenEye toolkits and The RDKit can be explored by selecting which toolkit(s) are and are not registered.

```
>>> from openforcefield.utils.toolkits import OpenEyeToolkitWrapper, GLOBAL_TOOLKIT_REGISTRY as toolkit_
registry
>>> from openforcefield.topology.molecule import Molecule
>>> molecule = Molecule.from_smiles('Cc1ccccc1')
>>> smiles_via_openeye = toolkit_registry.call('to_smiles', molecule)
>>> print(smiles_via_openeye)
[H]c1c(c(c(c1[H])[H])C([H])([H])[H])[H])[H]

>>> toolkit_registry.deregister_toolkit(OpenEyeToolkitWrapper)
>>> smiles_via_rdkit = toolkit_registry.call('to_smiles', molecule)
>>> print(smiles_via_rdkit)
[H][c]1[c]([H])[c]([H])[c]([C]([H])([H])[H])[c]([H])[c]1[H]
```

ToolkitRegistry	Registry for ToolkitWrapper objects
ToolkitWrapper	Toolkit wrapper base class.
OpenEyeToolkitWrapper	OpenEye toolkit wrapper
RDKitToolkitWrapper	RDKit toolkit wrapper
AmberToolsToolkitWrapper	AmberTools toolkit wrapper

### openforcefield.utils.toolkits.ToolkitRegistry

```
class openforcefield.utils.toolkits.ToolkitRegistry(toolkit_precedence=[],          excep-
                                                    tion_if_unavailable=True,      _regis-
                                                    ter_imported_toolkit_wrappers=False)

    Registry for ToolkitWrapper objects
```

#### Examples

Register toolkits in a specified order, skipping if unavailable

```
>>> from openforcefield.utils.toolkits import ToolkitRegistry
>>> toolkit_precedence = [OpenEyeToolkitWrapper, RDKitToolkitWrapper, AmberToolsToolkitWrapper]
>>> toolkit_registry = ToolkitRegistry(toolkit_precedence)
>>> toolkit_registry
ToolkitRegistry containing OpenEye Toolkit, The RDKit, AmberTools
```

Register all available toolkits (in the order OpenEye, RDKit, AmberTools, built-in)

```
>>> toolkits = [OpenEyeToolkitWrapper, RDKitToolkitWrapper, AmberToolsToolkitWrapper,
↳ BuiltInToolkitWrapper]
>>> toolkit_registry = ToolkitRegistry(toolkit_precedence=toolkits)
>>> toolkit_registry
ToolkitRegistry containing OpenEye Toolkit, The RDKit, AmberTools, Built-in Toolkit
```

Retrieve the global singleton toolkit registry, which is created when this module is imported from all available toolkits:

```
>>> from openforcefield.utils.toolkits import GLOBAL_TOOLKIT_REGISTRY as toolkit_registry
>>> toolkit_registry
ToolkitRegistry containing OpenEye Toolkit, The RDKit, AmberTools, Built-in Toolkit
```

Note that this will contain different ToolkitWrapper objects based on what toolkits are currently installed.

**Warning:** This API is experimental and subject to change.

### Attributes

- registered\_toolkit\_versions** Return a dict containing the version of each registered toolkit.
- registered\_toolkits** List registered toolkits.

### Methods

<code>add_toolkit(toolkit_wrapper)</code>	Append a ToolkitWrapper onto the list of toolkits in this ToolkitRegistry
<code>call(method_name, *args[, raise_exception_types])</code>	Execute the requested method by attempting to use all registered toolkits in order of precedence.
<code>deregister_toolkit(toolkit_wrapper)</code>	Remove a ToolkitWrapper from the list of toolkits in this ToolkitRegistry
<code>register_toolkit(toolkit_wrapper[, ...])</code>	Register the provided toolkit wrapper class, instantiating an object of it.
<code>resolve(method_name)</code>	Resolve the requested method name by checking all registered toolkits in order of precedence for one that provides the requested method.

```
__init__(toolkit_precedence=[], exception_if_unavailable=True, _register_imported_toolkit_wrappers=False)
Create an empty toolkit registry.
```

### Parameters

- toolkit\_precedence** [list, default=[]] List of toolkit wrapper classes, in order of desired precedence when performing molecule operations. If None, no toolkits will be registered.
- exception\_if\_unavailable** [bool, optional, default=True] If True, an exception will be raised if the toolkit is unavailable
- \_register\_imported\_toolkit\_wrappers** [bool, optional, default=False] If True, will attempt to register all imported ToolkitWrapper subclasses that can be found in the

order of `toolkit_precedence`, if specified. If `toolkit_precedence` is not specified, the default order is `[OpenEyeToolkitWrapper, RDKitToolkitWrapper, AmberToolsToolkitWrapper, BuiltInToolkitWrapper]`.

## Methods

<code>__init__([toolkit_precedence, ...])</code>	Create an empty toolkit registry.
<code>add_toolkit(toolkit_wrapper)</code>	Append a ToolkitWrapper onto the list of toolkits in this ToolkitRegistry
<code>call(method_name, *args[, raise_exception_types])</code>	Execute the requested method by attempting to use all registered toolkits in order of precedence.
<code>deregister_toolkit(toolkit_wrapper)</code>	Remove a ToolkitWrapper from the list of toolkits in this ToolkitRegistry
<code>register_toolkit(toolkit_wrapper[, ...])</code>	Register the provided toolkit wrapper class, instantiating an object of it.
<code>resolve(method_name)</code>	Resolve the requested method name by checking all registered toolkits in order of precedence for one that provides the requested method.

## Attributes

<code>registered_toolkit_versions</code>	Return a dict containing the version of each registered toolkit.
<code>registered_toolkits</code>	List registered toolkits.

### property `registered_toolkits`

List registered toolkits.

**Warning:** This API is experimental and subject to change.

### Returns

**toolkits** [iterable of toolkit objects]

### property `registered_toolkit_versions`

Return a dict containing the version of each registered toolkit.

**Warning:** This API is experimental and subject to change.

### Returns

**toolkit\_versions** [dict[str, str]] A dictionary mapping names and versions of wrapped toolkits

### `register_toolkit(toolkit_wrapper, exception_if_unavailable=True)`

Register the provided toolkit wrapper class, instantiating an object of it.

**Warning:** This API is experimental and subject to change.

**Parameters**

**toolkit\_wrapper** [instance or subclass of ToolkitWrapper] The toolkit wrapper to register or its class.

**exception\_if\_unavailable** [bool, optional, default=True] If True, an exception will be raised if the toolkit is unavailable

**deregister\_toolkit**(*toolkit\_wrapper*)

Remove a ToolkitWrapper from the list of toolkits in this ToolkitRegistry

**Warning:** This API is experimental and subject to change.

**Parameters**

**toolkit\_wrapper** [instance or subclass of ToolkitWrapper] The toolkit wrapper to remove from the registry

**Raises**

**InvalidToolkitError** If toolkit\_wrapper is not a ToolkitWrapper or subclass

**ToolkitUnavailableException** If toolkit\_wrapper is not found in the registry

**add\_toolkit**(*toolkit\_wrapper*)

Append a ToolkitWrapper onto the list of toolkits in this ToolkitRegistry

**Warning:** This API is experimental and subject to change.

**Parameters**

**toolkit\_wrapper** [openforcefield.utils.ToolkitWrapper] The ToolkitWrapper object to add to the list of registered toolkits

**Raises**

**InvalidToolkitError** If toolkit\_wrapper is not a ToolkitWrapper or subclass

**resolve**(*method\_name*)

Resolve the requested method name by checking all registered toolkits in order of precedence for one that provides the requested method.

**Parameters**

**method\_name** [str] The name of the method to resolve

**Returns**

**method** The method of the first registered toolkit that provides the requested method name

**Raises**

**NotImplementedError** if the requested method cannot be found among the registered toolkits

## Examples

Create a molecule, and call the toolkit `to_smiles()` method directly

```
>>> from openforcefield.topology import Molecule
>>> molecule = Molecule.from_smiles('Cc1ccccc1')
>>> toolkit_registry = ToolkitRegistry([OpenEyeToolkitWrapper, RDKitToolkitWrapper,
↳AmberToolsToolkitWrapper])
>>> method = toolkit_registry.resolve('to_smiles')
>>> smiles = method(molecule)
```

**call**(*method\_name*, \*args, raise\_exception\_types=None, \*\*kwargs)

Execute the requested method by attempting to use all registered toolkits in order of precedence.

\*args and \*\*kwargs are passed to the desired method, and return values of the method are returned

This is a convenient shorthand for `toolkit_registry.resolve_method(method_name)(*args, **kwargs)`

### Parameters

**method\_name** [str] The name of the method to execute

**raise\_exception\_types** [list of Exception subclasses, default=None] A list of exception-derived types to catch and raise immediately. If None, this will be set to [Exception], which will raise an error immediately if the first ToolkitWrapper in the registry fails. To try each ToolkitWrapper that provides a suitably-named method, set this to the empty list ([]). If all ToolkitWrappers run without raising any exceptions in this list, a single ValueError will be raised containing the each ToolkitWrapper that was tried and the exception it raised.

### Raises

**NotImplementedError** if the requested method cannot be found among the registered toolkits

**ValueError** if no exceptions in the `raise_exception_types` list were raised by ToolkitWrappers, and

all ToolkitWrappers in the ToolkitRegistry were tried.

Other forms of exceptions are possible if `raise_exception_types` is specified.

These are defined by the ToolkitWrapper method being called.

## Examples

Create a molecule, and call the toolkit `to_smiles()` method directly

```
>>> from openforcefield.topology import Molecule
>>> molecule = Molecule.from_smiles('Cc1ccccc1')
>>> toolkit_registry = ToolkitRegistry([OpenEyeToolkitWrapper, RDKitToolkitWrapper])
>>> smiles = toolkit_registry.call('to_smiles', molecule)
```

**openforcefield.utils.toolkits.ToolkitWrapper**

**class** openforcefield.utils.toolkits.**ToolkitWrapper**  
 Toolkit wrapper base class.

**Warning:** This API is experimental and subject to change.

**Attributes**

**toolkit\_file\_read\_formats** List of file formats that this toolkit can read.  
**toolkit\_file\_write\_formats** List of file formats that this toolkit can write.  
**toolkit\_installation\_instructions** classmethod(function) -> method  
**toolkit\_name** Return the name of the toolkit wrapped by this class as a str  
**toolkit\_version** Return the version of the wrapped toolkit as a str

**Methods**

<code>from_file(file_path, file_format[, ...])</code>	Return an openforcefield.topology.Molecule from a file using this toolkit.
<code>from_file_obj(file_obj, file_format[, ...])</code>	Return an openforcefield.topology.Molecule from a file-like object (an object with a “.read()” method using this
<code>is_available()</code>	Check whether the corresponding toolkit can be imported
<code>requires_toolkit()</code>	

`__init__(*args, **kwargs)`  
 Initialize self. See help(type(self)) for accurate signature.

**Methods**

<code>__init__(*args, **kwargs)</code>	Initialize self.
<code>from_file(file_path, file_format[, ...])</code>	Return an openforcefield.topology.Molecule from a file using this toolkit.
<code>from_file_obj(file_obj, file_format[, ...])</code>	Return an openforcefield.topology.Molecule from a file-like object (an object with a “.read()” method using this
<code>is_available()</code>	Check whether the corresponding toolkit can be imported
<code>requires_toolkit()</code>	

## Attributes

<code>toolkit_file_read_formats</code>	List of file formats that this toolkit can read.
<code>toolkit_file_write_formats</code>	List of file formats that this toolkit can write.
<code>toolkit_installation_instructions</code>	classmethod(function) -> method
<code>toolkit_name</code>	Return the name of the toolkit wrapped by this class as a str
<code>toolkit_version</code>	Return the version of the wrapped toolkit as a str

### property `toolkit_name`

Return the name of the toolkit wrapped by this class as a str

**Warning:** This API is experimental and subject to change.

## Returns

**`toolkit_name`** [str] The name of the wrapped toolkit

### property `toolkit_installation_instructions`

classmethod(function) -> method

Convert a function to be a class method.

A class method receives the class as implicit first argument, just like an instance method receives the instance. To declare a class method, use this idiom:

```
class C: @classmethod def f(cls, arg1, arg2, ...):
    ...
```

It can be called either on the class (e.g. `C.f()`) or on an instance (e.g. `C().f()`). The instance is ignored except for its class. If a class method is called for a derived class, the derived class object is passed as the implied first argument.

Class methods are different than C++ or Java static methods. If you want those, see the `staticmethod` builtin.

### property `toolkit_file_read_formats`

List of file formats that this toolkit can read.

### property `toolkit_file_write_formats`

List of file formats that this toolkit can write.

### static `is_available()`

Check whether the corresponding toolkit can be imported

## Returns

**`is_installed`** [bool] True if corresponding toolkit is installed, False otherwise.

### property `toolkit_version`

Return the version of the wrapped toolkit as a str

**Warning:** This API is experimental and subject to change.

**Returns**

**toolkit\_version** [str] The version of the wrapped toolkit

**from\_file**(*file\_path*, *file\_format*, *allow\_undefined\_stereo=False*)

Return an openforcefield.topology.Molecule from a file using this toolkit.

**Parameters**

**file\_path** [str] The file to read the molecule from

**file\_format** [str] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for details.

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if any molecules contain undefined stereochemistry.

**Returns**

—

**molecules** [Molecule or list of Molecules] a list of Molecule objects is returned.

**from\_file\_obj**(*file\_obj*, *file\_format*, *allow\_undefined\_stereo=False*)

Return an openforcefield.topology.Molecule from a file-like object (an object with a “.read()” method using toolkit.

**Parameters**

**file\_obj** [file-like object] The file-like object to read the molecule from

**file\_format** [str] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for details.

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if any molecules contain undefined stereochemistry. If false, the function skips loading the molecule.

**Returns**

**molecules** [Molecule or list of Molecules] a list of Molecule objects is returned.

**openforcefield.utils.toolkits.OpenEyeToolkitWrapper**

**class** openforcefield.utils.toolkits.**OpenEyeToolkitWrapper**  
OpenEye toolkit wrapper

**Warning:** This API is experimental and subject to change.

**Attributes**

**toolkit\_file\_read\_formats** List of file formats that this toolkit can read.

**toolkit\_file\_write\_formats** List of file formats that this toolkit can write.

**toolkit\_installation\_instructions** classmethod(function) -> method

**toolkit\_name** Return the name of the toolkit wrapped by this class as a str



`toolkit_version` Return the version of the wrapped toolkit as a str

## Methods

<code>assign_fractional_bond_orders(molecule[, ...])</code>	Update and store list of bond orders this molecule.
<code>assign_partial_charges(molecule[, ...])</code>	Compute partial charges with OpenEye quacpac, and assign the new values to the <code>partial_charges</code> attribute.
<code>canonical_order_atoms(molecule)</code>	Canonical order the atoms in the molecule using the OpenEye toolkit.
<code>compute_partial_charges_am1bcc(molecule[, ...])</code>	Compute AM1BCC partial charges with OpenEye quacpac.
<code>enumerate_protomers(molecule[, max_states])</code>	Enumerate the formal charges of a molecule to generate different protomoers.
<code>enumerate_stereoisomers(molecule[, ...])</code>	Enumerate the stereocenters and bonds of the current molecule.
<code>enumerate_tautomers(molecule[, max_states])</code>	Enumerate the possible tautomers of the current molecule
<code>find_smarts_matches(molecule, smarts[, ...])</code>	Find all SMARTS matches for the specified molecule, using the specified aromaticity model.
<code>from_file(file_path, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file using this toolkit.
<code>from_file_obj(file_obj, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file-like object (an object with a “ <code>.read()</code> ” method using this toolkit.
<code>from_inchi(inchi[, allow_undefined_stereo])</code>	Construct a Molecule from a InChI representation
<code>from_iupac(iupac_name[, allow_undefined_stereo])</code>	Construct a Molecule from an IUPAC name
<code>from_object(object[, allow_undefined_stereo])</code>	If given an OEMol (or OEMol-derived object), this function will load it into an <code>openforcefield.topology.molecule</code>
<code>from_openeye(oemol[, allow_undefined_stereo])</code>	Create a Molecule from an OpenEye molecule.
<code>from_smiles(smiles[, ...])</code>	Create a Molecule from a SMILES string using the OpenEye toolkit.
<code>generate_conformers(molecule[, ...])</code>	Generate molecule conformers using OpenEye Omega.
<code>get_tagged_smarts_connectivity(smarts)</code>	Returns a tuple of tuples indicating connectivity between tagged atoms in a SMARTS string.
<code>is_available([oetools])</code>	Check if the given OpenEye toolkit components are available.
<code>requires_toolkit()</code>	
<code>to_file(molecule, file_path, file_format)</code>	Writes an OpenFF Molecule to a file-like object
<code>to_file_obj(molecule, file_obj, file_format)</code>	Writes an OpenFF Molecule to a file-like object
<code>to_inchi(molecule[, fixed_hydrogens])</code>	Create an InChI string for the molecule using the RDKit Toolkit.
<code>to_inchikey(molecule[, fixed_hydrogens])</code>	Create an InChIKey for the molecule using the RDKit Toolkit.
<code>to_iupac(molecule)</code>	Generate IUPAC name from Molecule

continues on next page

Table 134 – continued from previous page

<code>to_openeye(molecule[, aromaticity_model])</code>	Create an OpenEye molecule using the specified aromaticity model
<code>to_smiles(molecule[, isomeric, ...])</code>	Uses the OpenEye toolkit to convert a Molecule into a SMILES string.

`__init__()`

Initialize self. See `help(type(self))` for accurate signature.

## Methods

<code>__init__()</code>	Initialize self.
<code>assign_fractional_bond_orders(molecule[, ...])</code>	Update and store list of bond orders this molecule.
<code>assign_partial_charges(molecule[, ...])</code>	Compute partial charges with OpenEye quacpac, and assign the new values to the <code>partial_charges</code> attribute.
<code>canonical_order_atoms(molecule)</code>	Canonical order the atoms in the molecule using the OpenEye toolkit.
<code>compute_partial_charges_am1bcc(molecule[, ...])</code>	Compute AM1BCC partial charges with OpenEye quacpac.
<code>enumerate_protomers(molecule[, max_states])</code>	Enumerate the formal charges of a molecule to generate different protomers.
<code>enumerate_stereoisomers(molecule[, ...])</code>	Enumerate the stereocenters and bonds of the current molecule.
<code>enumerate_tautomers(molecule[, max_states])</code>	Enumerate the possible tautomers of the current molecule
<code>find_smarts_matches(molecule, smarts[, ...])</code>	Find all SMARTS matches for the specified molecule, using the specified aromaticity model.
<code>from_file(file_path, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file using this toolkit.
<code>from_file_obj(file_obj, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file-like object (an object with a <code>“read()”</code> method using this toolkit.
<code>from_inchi(inchi[, allow_undefined_stereo])</code>	Construct a Molecule from a InChI representation
<code>from_iupac(iupac_name[, allow_undefined_stereo])</code>	Construct a Molecule from an IUPAC name
<code>from_object(object[, allow_undefined_stereo])</code>	If given an OEMol (or OEMol-derived object), this function will load it into an <code>openforcefield.topology.molecule</code>
<code>from_openeye(oemol[, allow_undefined_stereo])</code>	Create a Molecule from an OpenEye molecule.
<code>from_smiles(smiles[, ...])</code>	Create a Molecule from a SMILES string using the OpenEye toolkit.
<code>generate_conformers(molecule[, ...])</code>	Generate molecule conformers using OpenEye Omega.
<code>get_tagged_smarts_connectivity(smarts)</code>	Returns a tuple of tuples indicating connectivity between tagged atoms in a SMARTS string.
<code>is_available([oetools])</code>	Check if the given OpenEye toolkit components are available.

continues on next page

Table 135 – continued from previous page

<code>requires_toolkit()</code>	
<code>to_file(molecule, file_path, file_format)</code>	Writes an OpenFF Molecule to a file-like object
<code>to_file_obj(molecule, file_obj, file_format)</code>	Writes an OpenFF Molecule to a file-like object
<code>to_inchi(molecule[, fixed_hydrogens])</code>	Create an InChI string for the molecule using the RDKit Toolkit.
<code>to_inchikey(molecule[, fixed_hydrogens])</code>	Create an InChIKey for the molecule using the RDKit Toolkit.
<code>to_iupac(molecule)</code>	Generate IUPAC name from Molecule
<code>to_openeye(molecule[, aromaticity_model])</code>	Create an OpenEye molecule using the specified aromaticity model
<code>to_smiles(molecule[, isomeric, ...])</code>	Uses the OpenEye toolkit to convert a Molecule into a SMILES string.

### Attributes

<code>toolkit_file_read_formats</code>	List of file formats that this toolkit can read.
<code>toolkit_file_write_formats</code>	List of file formats that this toolkit can write.
<code>toolkit_installation_instructions</code>	classmethod(function) -> method
<code>toolkit_name</code>	Return the name of the toolkit wrapped by this class as a str
<code>toolkit_version</code>	Return the version of the wrapped toolkit as a str

**static** `is_available(oetools='oechem', 'oequacpac', 'oeiupac', 'oeomega')`

Check if the given OpenEye toolkit components are available.

If the OpenEye toolkit is not installed or no license is found for at least one the given toolkits , False is returned.

### Parameters

**oetools** [str or iterable of strings, optional, default=('oechem', 'oequacpac', 'oeiupac', 'oeomega')] Set of tools to check by their Python module name. Defaults to the complete set of tools supported by this function. Also accepts a single tool to check as a string instead of an iterable of length 1.

### Returns

**all\_installed** [bool] True if all tools in oetools are installed and licensed, False otherwise

**from\_object(object, allow\_undefined\_stereo=False)**

If given an OEMol (or OEMol-derived object), this function will load it into an openforcefield.topology.molecule

### Parameters

**object** [A molecule-like object] An object to by type-checked.

**allow\_undefined\_stereo** [bool, default=False] Whether to accept molecules with undefined stereocenters. If False, an exception will be raised if a molecule with undefined stereochemistry is passed into this function.

### Returns

**Molecule** An openforcefield.topology.molecule Molecule.

**Raises**

**NotImplementedError** If the object could not be converted into a Molecule.

**from\_file**(*file\_path*, *file\_format*, *allow\_undefined\_stereo=False*)

Return an openforcefield.topology.Molecule from a file using this toolkit.

**Parameters**

**file\_path** [str] The file to read the molecule from

**file\_format** [str] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for details.

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

**Returns**

**molecules** [List[Molecule]] The list of Molecule objects in the file.

**Raises**

**GAFFAtomTypeWarning** If the loaded mol2 file possibly uses GAFF atom types, which are not supported.

**Examples**

Load a mol2 file into an OpenFF Molecule object.

```
>>> from openforcefield.utils import get_data_file_path
>>> mol2_file_path = get_data_file_path('molecules/cyclohexane.mol2')
>>> toolkit = OpenEyeToolkitWrapper()
>>> molecule = toolkit.from_file(mol2_file_path, file_format='mol2')
```

**from\_file\_obj**(*file\_obj*, *file\_format*, *allow\_undefined\_stereo=False*)

Return an openforcefield.topology.Molecule from a file-like object (an object with a “.read()” method using this toolkit.

**Parameters**

**file\_obj** [file-like object] The file-like object to read the molecule from

**file\_format** [str] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for details.

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

**Returns**

**molecules** [List[Molecule]] The list of Molecule objects in the file object.

**Raises**

**GAFFAtomTypeWarning** If the loaded mol2 file possibly uses GAFF atom types, which are not supported.

**to\_file\_obj**(*molecule*, *file\_obj*, *file\_format*)

Writes an OpenFF Molecule to a file-like object

**Parameters**

**molecule** [an OpenFF Molecule] The molecule to write

**file\_obj** The file-like object to write to

**file\_format** The format for writing the molecule data

**to\_file**(*molecule*, *file\_path*, *file\_format*)

Writes an OpenFF Molecule to a file-like object

#### Parameters

**molecule** [an OpenFF Molecule] The molecule to write

**file\_path** The file path to write to.

**file\_format** The format for writing the molecule data

**enumerate\_protomers**(*molecule*, *max\_states*=10)

Enumerate the formal charges of a molecule to generate different protomoers.

#### Parameters

**molecule:** `openforcefield.topology.Molecule` The molecule whose state we should enumerate

**max\_states:** `int optional, default=10`, The maximum number of protomer states to be returned.

#### Returns

**molecules:** `List[openforcefield.topology.Molecule]`, A list of the protomers of the input molecules not including the input.

**enumerate\_stereoisomers**(*molecule*, *undefined\_only*=False, *max\_isomers*=20, *rationalise*=True)

Enumerate the stereocenters and bonds of the current molecule.

#### Parameters

**molecule:** `openforcefield.topology.Molecule` The molecule whose state we should enumerate

**undefined\_only:** `bool optional, default=False` If we should enumerate all stereocenters and bonds or only those with undefined stereochemistry

**max\_isomers:** `int optional, default=20` The maximum amount of molecules that should be returned

**rationalise:** `bool optional, default=True` If we should try to build and rationalise the molecule to ensure it can exist

#### Returns

**molecules:** `List[openforcefield.topology.Molecule]` A list of openforcefield.topology.Molecule instances

**enumerate\_tautomers**(*molecule*, *max\_states*=20)

Enumerate the possible tautomers of the current molecule

#### Parameters

**molecule:** `openforcefield.topology.Molecule` The molecule whose state we should enumerate

**max\_states:** `int optional, default=20` The maximum amount of molecules that should be returned

#### Returns

**molecules:** List[openforcefield.topology.Molecule] A list of openforcefield.topology.Molecule instances excluding the input molecule.

**static from\_openeye**(oemol, allow\_undefined\_stereo=False)

Create a Molecule from an OpenEye molecule. If the OpenEye molecule has implicit hydrogens, this function will make them explicit.

OEAAtom s have a different set of allowed value for partial charges than openforcefield.topology.Molecule s. In the OpenEye toolkits, partial charges are stored on individual OEAAtom s, and their values are initialized to 0.0. In the Open Force Field Toolkit, an openforcefield.topology.Molecule's partial\_charges attribute is initialized to None and can be set to a simtk.unit.Quantity-wrapped numpy array with units of elementary charge. The Open Force Field Toolkit considers an OEMol where every OEAAtom has a partial charge of float('nan') to be equivalent to an Open Force Field Molecule's partial\_charges = None. This assumption is made in both to\_openeye and from\_openeye.

**Warning:** This API is experimental and subject to change.

#### Parameters

**oemol** [openeye.oechem.OEMol] An OpenEye molecule

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecule** [openforcefield.topology.Molecule] An openforcefield molecule

#### Examples

Create a Molecule from an OpenEye OEMol

```
>>> from openeye import oechem
>>> from openforcefield.tests.utils import get_data_file_path
>>> ifs = oechem.oemolistream(get_data_file_path('systems/monomers/ethanol.mol2'))
>>> oemols = list(ifs.GetOEGraphMols())
```

```
>>> toolkit_wrapper = OpenEyeToolkitWrapper()
>>> molecule = toolkit_wrapper.from_openeye(oemols[0])
```

**static to\_openeye**(molecule, aromaticity\_model='OEArModel\_MDL')

Create an OpenEye molecule using the specified aromaticity model

OEAAtom s have a different set of allowed value for partial charges than openforcefield.topology.Molecule s. In the OpenEye toolkits, partial charges are stored on individual OEAAtom s, and their values are initialized to 0.0. In the Open Force Field Toolkit, an openforcefield.topology.Molecule's partial\_charges attribute is initialized to None and can be set to a simtk.unit.Quantity-wrapped numpy array with units of elementary charge. The Open Force Field Toolkit considers an OEMol where every OEAAtom has a partial charge of float('nan') to be equivalent to an Open Force Field Molecule's partial\_charges = None. This assumption is made in both to\_openeye and from\_openeye.

**Warning:** This API is experimental and subject to change.

### Parameters

**molecule** [openforcefield.topology.molecule.Molecule object]

The molecule to convert to an OEMol

**aromaticity\_model** [str, optional, default=DEFAULT\_AROMATICITY\_MODEL]

The aromaticity model to use

### Returns

**oemol** [openeye.oechem.OEMol] An OpenEye molecule

### Examples

Create an OpenEye molecule from a Molecule

```
>>> from openforcefield.topology import Molecule
>>> toolkit_wrapper = OpenEyeToolkitWrapper()
>>> molecule = Molecule.from_smiles('CC')
>>> oemol = toolkit_wrapper.to_openeye(molecule)
```

**to\_smiles**(*molecule*, *isomeric=True*, *explicit\_hydrogens=True*, *mapped=False*)

Uses the OpenEye toolkit to convert a Molecule into a SMILES string. A partially mapped smiles can also be generated for atoms of interest by supplying an *atom\_map* to the properties dictionary.

### Parameters

**molecule** [An openforcefield.topology.Molecule] The molecule to convert into a SMILES.

**isomeric: bool optional, default= True** return an isomeric smiles

**explicit\_hydrogens: bool optional, default=True** return a smiles string containing all hydrogens explicitly

**mapped: bool optional, default=False** return a explicit hydrogen mapped smiles, the atoms to be mapped can be controlled by supplying an atom map into the properties dictionary. If no mapping is passed all atoms will be mapped in order, else an atom map dictionary from the current atom index to the map id should be supplied with no duplicates. The map ids (values) should start from 0 or 1.

### Returns

**smiles** [str] The SMILES of the input molecule.

**to\_inchi**(*molecule*, *fixed\_hydrogens=False*)

Create an InChI string for the molecule using the RDKit Toolkit. InChI is a standardised representation that does not capture tautomers unless specified using the fixed hydrogen layer.

For information on InChi see here <https://iupac.org/who-we-are/divisions/division-details/inchi/>

### Parameters

**molecule** [An openforcefield.topology.Molecule] The molecule to convert into a SMILES.

**fixed\_hydrogens:** **bool, default=False** If a fixed hydrogen layer should be added to the InChI, if *True* this will produce a non standard specific InChI string of the molecule.

#### Returns

**inchi:** **str** The InChI string of the molecule.

**to\_inchikey**(*molecule*, *fixed\_hydrogens=False*)

Create an InChIKey for the molecule using the RDKit Toolkit. InChIKey is a standardised representation that does not capture tautomers unless specified using the fixed hydrogen layer.

For information on InChi see here <https://iupac.org/who-we-are/divisions/division-details/inchi/>

#### Parameters

**molecule** [An `openforcefield.topology.Molecule`] The molecule to convert into a SMILES.

**fixed\_hydrogens:** **bool, default=False** If a fixed hydrogen layer should be added to the InChI, if *True* this will produce a non standard specific InChI string of the molecule.

#### Returns

**inchi\_key:** **str** The InChIKey representation of the molecule.

**to\_iupac**(*molecule*)

Generate IUPAC name from Molecule

#### Parameters

**molecule** [An `openforcefield.topology.Molecule`] The molecule to convert into a SMILES.

#### Returns

**iupac\_name** [str] IUPAC name of the molecule

### Examples

```
>>> from openforcefield.topology import Molecule
>>> from openforcefield.utils import get_data_file_path
>>> sdf_filepath = get_data_file_path('molecules/ethanol.sdf')
>>> molecule = Molecule(sdf_filepath)
>>> toolkit = OpenEyeToolkitWrapper()
>>> iupac_name = toolkit.to_iupac(molecule)
```

**canonical\_order\_atoms**(*molecule*)

Canonical order the atoms in the molecule using the OpenEye toolkit.

#### Parameters

**molecule:** **openforcefield.topology.Molecule** The input molecule

#### Returns

**molecule** [`openforcefield.topology.Molecule`] The input molecule, with canonically-indexed atoms and bonds.



**from\_smiles**(*smiles*, *hydrogens\_are\_explicit*=False, *allow\_undefined\_stereo*=False)  
 Create a Molecule from a SMILES string using the OpenEye toolkit.

**Warning:** This API is experimental and subject to change.

#### Parameters

- smiles** [str] The SMILES string to turn into a molecule
- hydrogens\_are\_explicit** [bool, default = False] If False, OE will perform hydrogen addition using OEAddExplicitHydrogens
- allow\_undefined\_stereo** [bool, default=False] Whether to accept SMILES with undefined stereochemistry. If False, an exception will be raised if a SMILES with undefined stereochemistry is passed into this function.

#### Returns

**molecule** [openforcefield.topology.Molecule] An openforcefield-style molecule.

**from\_inchi**(*inchi*, *allow\_undefined\_stereo*=False)  
 Construct a Molecule from a InChI representation

#### Parameters

- inchi** [str] The InChI representation of the molecule.
- allow\_undefined\_stereo** [bool, default=False] Whether to accept InChI with undefined stereochemistry. If False, an exception will be raised if a InChI with undefined stereochemistry is passed into this function.

#### Returns

**molecule** [openforcefield.topology.Molecule]

**from\_iupac**(*iupac\_name*, *allow\_undefined\_stereo*=False, *\*\*kwargs*)  
 Construct a Molecule from an IUPAC name

#### Parameters

- iupac\_name** [str] The IUPAC or common name of the molecule.
- allow\_undefined\_stereo** [bool, default=False] Whether to accept a molecule name with undefined stereochemistry. If False, an exception will be raised if a molecule name with undefined stereochemistry is passed into this function.

#### Returns

**molecule** [openforcefield.topology.Molecule]

**generate\_conformers**(*molecule*, *n\_conformers*=1, *rms\_cutoff*=None, *clear\_existing*=True)  
 Generate molecule conformers using OpenEye Omega.

**Warning:** This API is experimental and subject to change.

**molecule** [a Molecule] The molecule to generate conformers for.

**n\_conformers** [int, default=1] The maximum number of conformers to generate.

**rms\_cutoff** [simtk.Quantity-wrapped float, in units of distance, optional, default=None] The minimum RMS value at which two conformers are considered redundant and one is deleted. If None, the cutoff is set to 1 Angstrom

**clear\_existing** [bool, default=True] Whether to overwrite existing conformers for the molecule

**assign\_partial\_charges**(*molecule*, *partial\_charge\_method*=None, *use\_conformers*=None, *strict\_n\_conformers*=False)

Compute partial charges with OpenEye quacpac, and assign the new values to the `partial_charges` attribute.

**Warning:** This API is experimental and subject to change.

#### Parameters

**molecule** [openforcefield.topology.Molecule] Molecule for which partial charges are to be computed

**partial\_charge\_method** [str, optional, default=None] The charge model to use. One of ['amberff94', 'mmff', 'mmff94', *am1-mulliken*, 'am1bcc', 'am1bccnosymspt', 'am1bccelf10'] If None, 'am1-mulliken' will be used.

**use\_conformers** [iterable of simtk.unit.Quantity-wrapped numpy arrays, each with shape (n\_atoms, 3) and dimension of distance. Optional, default = None] Coordinates to use for partial charge calculation. If None, an appropriate number of conformers will be generated.

**strict\_n\_conformers** [bool, default=False] Whether to raise an exception if an invalid number of conformers is provided for the given charge method. If this is False and an invalid number of conformers is found, a warning will be raised.

#### Raises

**ChargeMethodUnavailableError** if the requested charge method can not be handled by this toolkit

**ChargeCalculationError** if the charge method is supported by this toolkit, but fails

**compute\_partial\_charges\_am1bcc**(*molecule*, *use\_conformers*=None, *strict\_n\_conformers*=False)

Compute AM1BCC partial charges with OpenEye quacpac. This function will attempt to use the OEAM1BCSELF10 charge generation method, but may print a warning and fall back to normal OEAM1BCC if an error is encountered. This error is known to occur with some carboxylic acids, and is under investigation by OpenEye.

**Warning:** This API is experimental and subject to change.

#### Parameters

**molecule** [Molecule] Molecule for which partial charges are to be computed

**use\_conformers** [iterable of simtk.unit.Quantity-wrapped numpy arrays, each with shape (n\_atoms, 3) and dimension of distance. Optional, default = None] Coordinates to use for partial charge calculation. If None, an appropriate number of conformers will be generated.

**strict\_n\_conformers** [bool, default=False] Whether to raise an exception if an invalid number of conformers is provided. If this is False and an invalid number of conformers is found, a warning will be raised instead of an Exception.

#### Returns

**charges** [numpy.array of shape (natoms) of type float] The partial charges

**assign\_fractional\_bond\_orders**(*molecule*, *bond\_order\_model*=None, *use\_conformers*=None)

Update and store list of bond orders this molecule. Bond orders are stored on each bond, in the *bond.fractional\_bond\_order* attribute.

**Warning:** This API is experimental and subject to change.

#### Parameters

**molecule** [openforcefield.topology.molecule Molecule] The molecule to assign wiberg bond orders to

**bond\_order\_model** [str, optional, default=None] The charge model to use. One of ['am1-wiberg', 'pm3-wiberg']. If None, 'am1-wiberg' will be used.

**use\_conformers** [iterable of simtk.unit.Quantity(np.array) with shape (n\_atoms, 3) and dimension of distance, optional, default=None] The conformers to use for fractional bond order calculation. If None, an appropriate number of conformers will be generated by an available ToolkitWrapper.

**get\_tagged\_smarts\_connectivity**(*smarts*)

Returns a tuple of tuples indicating connectivity between tagged atoms in a SMARTS string. Does not return bond order.

#### Parameters

**smarts** [str] The tagged SMARTS to analyze

#### Returns

**unique\_tags** [tuple of int] A sorted tuple of all unique tagged atom map indices.

**tagged\_atom\_connectivity** [tuple of tuples of int, shape n\_tagged\_bonds x 2] A tuple of tuples, where each inner tuple is a pair of tagged atoms (tag\_idx\_1, tag\_idx\_2) which are bonded. The inner tuples are ordered smallest-to-largest, and the tuple of tuples is ordered lexically. So the return value for an improper torsion would be ((1, 2), (2, 3), (2, 4)).

#### Raises

**SMIRKSParsingError** If OpenEye toolkit was unable to parse the provided smirks/tagged smarts

**find\_smarts\_matches**(*molecule*, *smarts*, *aromaticity\_model*='OEArModel\_MDL')

Find all SMARTS matches for the specified molecule, using the specified aromaticity model.

**Warning:** This API is experimental and subject to change.

#### Parameters

**molecule** [openforcefield.topology.Molecule] The molecule for which all specified SMARTS matches are to be located

**smarts** [str] SMARTS string with optional SMIRKS-style atom tagging

**aromaticity\_model** [str, optional, default='OEAroModel\_MDL'] Molecule is prepared with this aromaticity model prior to querying.

**.. note :: Currently, the only supported ``aromaticity\_model`` is ``OEAroModel\_MDL``**

**property toolkit\_file\_read\_formats**

List of file formats that this toolkit can read.

**property toolkit\_file\_write\_formats**

List of file formats that this toolkit can write.

**property toolkit\_installation\_instructions**

classmethod(function) -> method

Convert a function to be a class method.

A class method receives the class as implicit first argument, just like an instance method receives the instance. To declare a class method, use this idiom:

```
class C: @classmethod def f(cls, arg1, arg2, ...):
```

```
...
```

It can be called either on the class (e.g. C.f()) or on an instance (e.g. C().f()). The instance is ignored except for its class. If a class method is called for a derived class, the derived class object is passed as the implied first argument.

Class methods are different than C++ or Java static methods. If you want those, see the staticmethod builtin.

**property toolkit\_name**

Return the name of the toolkit wrapped by this class as a str

**Warning:** This API is experimental and subject to change.

**Returns**

**toolkit\_name** [str] The name of the wrapped toolkit

**property toolkit\_version**

Return the version of the wrapped toolkit as a str

**Warning:** This API is experimental and subject to change.

**Returns**

**toolkit\_version** [str] The version of the wrapped toolkit

**openforcefield.utils.toolkits.RDKitToolkitWrapper**

**class** openforcefield.utils.toolkits.RDKitToolkitWrapper  
 RDKit toolkit wrapper

**Warning:** This API is experimental and subject to change.

**Attributes**

**toolkit\_file\_read\_formats** List of file formats that this toolkit can read.  
**toolkit\_file\_write\_formats** List of file formats that this toolkit can write.  
**toolkit\_installation\_instructions** classmethod(function) -> method  
**toolkit\_name** Return the name of the toolkit wrapped by this class as a str  
**toolkit\_version** Return the version of the wrapped toolkit as a str

**Methods**

<code>canonical_order_atoms(molecule)</code>	Canonical order the atoms in the molecule using the RDKit.
<code>enumerate_stereoisomers(molecule[, ...])</code>	Enumerate the stereocenters and bonds of the current molecule.
<code>enumerate_tautomers(molecule[, max_states])</code>	Enumerate the possible tautomers of the current molecule.
<code>find_rings(molecule)</code>	Find the rings in a given molecule.
<code>find_smarts_matches(molecule, smarts[, ...])</code>	Find all SMARTS matches for the specified molecule, using the specified aromaticity model.
<code>from_file(file_path, file_format[, ...])</code>	Create an openforcefield.topology.Molecule from a file using this toolkit.
<code>from_file_obj(file_obj, file_format[, ...])</code>	Return an openforcefield.topology.Molecule from a file-like object (an object with a “.read()” method using this toolkit.
<code>from_inchi(inchi[, allow_undefined_stereo])</code>	Construct a Molecule from a InChI representation
<code>from_object(object[, allow_undefined_stereo])</code>	If given an rdchem.Mol (or rdchem.Mol-derived object), this function will load it into an openforcefield.topology.molecule.
<code>from_pdb_and_smiles(file_path, smiles[, ...])</code>	Create a Molecule from a pdb file and a SMILES string using RDKit.
<code>from_rdkit(rdmol[, allow_undefined_stereo])</code>	Create a Molecule from an RDKit molecule.
<code>from_smiles(smiles[, ...])</code>	Create a Molecule from a SMILES string using the RDKit toolkit.
<code>generate_conformers(molecule[, ...])</code>	Generate molecule conformers using RDKit.
<code>get_tagged_smarts_connectivity(smarts)</code>	Returns a tuple of tuples indicating connectivity between tagged atoms in a SMARTS string.
<code>is_available()</code>	Check whether the RDKit toolkit can be imported
<code>requires_toolkit()</code>	
<code>to_file(molecule, file_path, file_format)</code>	Writes an OpenFF Molecule to a file-like object

continues on next page

Table 137 – continued from previous page

<code>to_file_obj(molecule, file_obj, file_format)</code>	Writes an OpenFF Molecule to a file-like object
<code>to_inchi(molecule[, fixed_hydrogens])</code>	Create an InChI string for the molecule using the RDKit Toolkit.
<code>to_inchikey(molecule[, fixed_hydrogens])</code>	Create an InChIKey for the molecule using the RDKit Toolkit.
<code>to_rdkit(molecule[, aromaticity_model])</code>	Create an RDKit molecule
<code>to_smiles(molecule[, isomeric, ...])</code>	Uses the RDKit toolkit to convert a Molecule into a SMILES string.

**`__init__()`**

Initialize self. See `help(type(self))` for accurate signature.

**Methods**

<code>__init__()</code>	Initialize self.
<code>canonical_order_atoms(molecule)</code>	Canonical order the atoms in the molecule using the RDKit.
<code>enumerate_stereoisomers(molecule[, ...])</code>	Enumerate the stereocenters and bonds of the current molecule.
<code>enumerate_tautomers(molecule[, max_states])</code>	Enumerate the possible tautomers of the current molecule.
<code>find_rings(molecule)</code>	Find the rings in a given molecule.
<code>find_smarts_matches(molecule, smarts[, ...])</code>	Find all SMARTS matches for the specified molecule, using the specified aromaticity model.
<code>from_file(file_path, file_format[, ...])</code>	Create an <code>openforcefield.topology.Molecule</code> from a file using this toolkit.
<code>from_file_obj(file_obj, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file-like object (an object with a “ <code>.read()</code> ” method using this toolkit.
<code>from_inchi(inchi[, allow_undefined_stereo])</code>	Construct a Molecule from a InChI representation
<code>from_object(object[, allow_undefined_stereo])</code>	If given an <code>rdchem.Mol</code> (or <code>rdchem.Mol</code> -derived object), this function will load it into an <code>openforcefield.topology.molecule</code> .
<code>from_pdb_and_smiles(file_path, smiles[, ...])</code>	Create a Molecule from a pdb file and a SMILES string using RDKit.
<code>from_rdkit(rdmol[, allow_undefined_stereo])</code>	Create a Molecule from an RDKit molecule.
<code>from_smiles(smiles[, ...])</code>	Create a Molecule from a SMILES string using the RDKit toolkit.
<code>generate_conformers(molecule[, ...])</code>	Generate molecule conformers using RDKit.
<code>get_tagged_smarts_connectivity(smarts)</code>	Returns a tuple of tuples indicating connectivity between tagged atoms in a SMARTS string.
<code>is_available()</code>	Check whether the RDKit toolkit can be imported
<code>requires_toolkit()</code>	
<code>to_file(molecule, file_path, file_format)</code>	Writes an OpenFF Molecule to a file-like object
<code>to_file_obj(molecule, file_obj, file_format)</code>	Writes an OpenFF Molecule to a file-like object
<code>to_inchi(molecule[, fixed_hydrogens])</code>	Create an InChI string for the molecule using the RDKit Toolkit.

continues on next page

Table 138 – continued from previous page

<code>to_inchikey(molecule[, fixed_hydrogens])</code>	Create an InChIKey for the molecule using the RDKit Toolkit.
<code>to_rdkit(molecule[, aromaticity_model])</code>	Create an RDKit molecule
<code>to_smiles(molecule[, isomeric, ...])</code>	Uses the RDKit toolkit to convert a Molecule into a SMILES string.

**Attributes**

<code>toolkit_file_read_formats</code>	List of file formats that this toolkit can read.
<code>toolkit_file_write_formats</code>	List of file formats that this toolkit can write.
<code>toolkit_installation_instructions</code>	classmethod(function) -> method
<code>toolkit_name</code>	Return the name of the toolkit wrapped by this class as a str
<code>toolkit_version</code>	Return the version of the wrapped toolkit as a str

**property toolkit\_file\_write\_formats**

List of file formats that this toolkit can write.

**static is\_available()**

Check whether the RDKit toolkit can be imported

**Returns**

**is\_installed** [bool] True if RDKit is installed, False otherwise.

**from\_object(object, allow\_undefined\_stereo=False)**

If given an rdchem.Mol (or rdchem.Mol-derived object), this function will load it into an openforcefield.topology.molecule. Otherwise, it will return False.

**Parameters**

**object** [A rdchem.Mol-derived object] An object to be type-checked and converted into a Molecule, if possible.

**allow\_undefined\_stereo** [bool, default=False] Whether to accept molecules with undefined stereocenters. If False, an exception will be raised if a molecule with undefined stereochemistry is passed into this function.

**Returns**

**Molecule or False** An openforcefield.topology.molecule Molecule.

**Raises**

**NotImplementedError** If the object could not be converted into a Molecule.

**from\_pdb\_and\_smiles(file\_path, smiles, allow\_undefined\_stereo=False)**

Create a Molecule from a pdb file and a SMILES string using RDKit.

Requires RDKit to be installed.

The molecule is created and sanitised based on the SMILES string, we then find a mapping between this molecule and one from the PDB based only on atomic number and connections. The SMILES molecule is then reindex to match the PDB, the conformer is attached and the molecule returned.

**Parameters**

**file\_path:** str PDB file path

**smiles** [str] a valid smiles string for the pdb, used for seterochemistry and bond order

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecule** [openforcefield.Molecule] An OFFMol instance with ordering the same as used in the PDB file.

#### Raises

**InvalidConformerError** [if the SMILES and PDB molecules are not isomorphic.]

**from\_file**(*file\_path*, *file\_format*, *allow\_undefined\_stereo*=False)

Create an openforcefield.topology.Molecule from a file using this toolkit.

#### Parameters

**file\_path** [str] The file to read the molecule from

**file\_format** [str] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for details.

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecules** [iterable of Molecules] a list of Molecule objects is returned.

**from\_file\_obj**(*file\_obj*, *file\_format*, *allow\_undefined\_stereo*=False)

Return an openforcefield.topology.Molecule from a file-like object (an object with a ".read()" method using this toolkit.

<b>Warning:</b> This API is experimental and subject to change.
---

#### Parameters

**file\_obj** [file-like object] The file-like object to read the molecule from

**file\_format** [str] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for details.

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if oemol contains undefined stereochemistry.

#### Returns

**molecules** [Molecule or list of Molecules] a list of Molecule objects is returned.

**to\_file\_obj**(*molecule*, *file\_obj*, *file\_format*)

Writes an OpenFF Molecule to a file-like object

#### Parameters

**molecule** [an OpenFF Molecule] The molecule to write



**file\_obj** The file-like object to write to

**file\_format** The format for writing the molecule data

**to\_file**(*molecule*, *file\_path*, *file\_format*)

Writes an OpenFF Molecule to a file-like object

#### Parameters

**molecule** [an OpenFF Molecule] The molecule to write

**file\_path** The file path to write to

**file\_format** The format for writing the molecule data

#### Returns

**enumerate\_stereoisomers**(*molecule*, *undefined\_only=False*, *max\_isomers=20*, *rationalise=True*)

Enumerate the stereocenters and bonds of the current molecule.

#### Parameters

**molecule: openforcefield.topology.Molecule** The molecule whose state we should enumerate

**undefined\_only: bool optional, default=False** If we should enumerate all stereocenters and bonds or only those with undefined stereochemistry

**max\_isomers: int optional, default=20** The maximum amount of molecules that should be returned

**rationalise: bool optional, default=True** If we should try to build and rationalise the molecule to ensure it can exist

#### Returns

**molecules: List[openforcefield.topology.Molecule]** A list of openforcefield.topology.Molecule instances

**enumerate\_tautomers**(*molecule*, *max\_states=20*)

Enumerate the possible tautomers of the current molecule.

#### Parameters

**molecule: openforcefield.topology.Molecule** The molecule whose state we should enumerate

**max\_states: int optional, default=20** The maximum amount of molecules that should be returned

#### Returns

**molecules: List[openforcefield.topology.Molecule]** A list of openforcefield.topology.Molecule instances not including the input molecule.

**canonical\_order\_atoms**(*molecule*)

Canonical order the atoms in the molecule using the RDKit.

#### Parameters

**molecule: openforcefield.topology.Molecule** The input molecule

#### Returns

**molecule** [openforcefield.topology.Molecule] The input molecule, with canonically-indexed atoms and bonds.

**to\_smiles**(*molecule*, *isomeric=True*, *explicit\_hydrogens=True*, *mapped=False*)

Uses the RDKit toolkit to convert a Molecule into a SMILES string. A partially mapped smiles can also be generated for atoms of interest by supplying an *atom\_map* to the properties dictionary.

#### Parameters

**molecule** [An openforcefield.topology.Molecule] The molecule to convert into a SMILES.

**isomeric: bool optional, default= True** return an isomeric smiles

**explicit\_hydrogens: bool optional, default=True** return a smiles string containing all hydrogens explicitly

**mapped: bool optional, default=False** return a explicit hydrogen mapped smiles, the atoms to be mapped can be controlled by supplying an atom map into the properties dictionary. If no mapping is passed all atoms will be mapped in order, else an atom map dictionary from the current atom index to the map id should be supplied with no duplicates. The map ids (values) should start from 0 or 1.

#### Returns

**smiles** [str] The SMILES of the input molecule.

**from\_smiles**(*smiles*, *hydrogens\_are\_explicit=False*, *allow\_undefined\_stereo=False*)

Create a Molecule from a SMILES string using the RDKit toolkit.

**Warning:** This API is experimental and subject to change.

#### Parameters

**smiles** [str] The SMILES string to turn into a molecule

**hydrogens\_are\_explicit** [bool, default=False] If False, RDKit will perform hydrogen addition using Chem.AddHs

**allow\_undefined\_stereo** [bool, default=False] Whether to accept SMILES with undefined stereochemistry. If False, an exception will be raised if a SMILES with undefined stereochemistry is passed into this function.

#### Returns

**molecule** [openforcefield.topology.Molecule] An openforcefield-style molecule.

**from\_inchi**(*inchi*, *allow\_undefined\_stereo=False*)

Construct a Molecule from a InChI representation

#### Parameters

**inchi** [str] The InChI representation of the molecule.

**allow\_undefined\_stereo** [bool, default=False] Whether to accept InChI with undefined stereochemistry. If False, an exception will be raised if a InChI with undefined stereochemistry is passed into this function.

#### Returns

**molecule** [openforcefield.topology.Molecule]

**generate\_conformers**(*molecule*, *n\_conformers*=1, *rms\_cutoff*=None, *clear\_existing*=True)  
Generate molecule conformers using RDKit.

**Warning:** This API is experimental and subject to change.

**molecule** [a Molecule] The molecule to generate conformers for.

**n\_conformers** [int, default=1] Maximum number of conformers to generate.

**rms\_cutoff** [simtk.Quantity-wrapped float, in units of distance, optional, default=None] The minimum RMS value at which two conformers are considered redundant and one is deleted. If None, the cutoff is set to 1 Angstrom

**clear\_existing** [bool, default=True] Whether to overwrite existing conformers for the molecule.

**from\_rdkit**(*rdmol*, *allow\_undefined\_stereo*=False)  
Create a Molecule from an RDKit molecule.

Requires the RDKit to be installed.

**Warning:** This API is experimental and subject to change.

#### Parameters

**rdmol** [rkit.RDMol] An RDKit molecule

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if rdmol contains undefined stereochemistry.

#### Returns

**molecule** [openforcefield.Molecule] An openforcefield molecule

#### Examples

Create a molecule from an RDKit molecule

```
>>> from rdkit import Chem
>>> from openforcefield.tests.utils import get_data_file_path
>>> rdmol = Chem.MolFromMolFile(get_data_file_path('systems/monomers/ethanol.sdf'))
```

```
>>> toolkit_wrapper = RDKitToolkitWrapper()
>>> molecule = toolkit_wrapper.from_rdkit(rdmol)
```

**classmethod to\_rdkit**(*molecule*, *aromaticity\_model*='OEAroModel\_MDL')  
Create an RDKit molecule

Requires the RDKit to be installed.

**Warning:** This API is experimental and subject to change.

#### Parameters

**aromaticity\_model** [str, optional, default=DEFAULT\_AROMATICITY\_MODEL] The aromaticity model to use

#### Returns

**rdmol** [rkit.RDMol] An RDKit molecule

#### Examples

Convert a molecule to RDKit

```
>>> from openforcefield.topology import Molecule
>>> ethanol = Molecule.from_smiles('CCO')
>>> rdmol = ethanol.to_rdkit()
```

**to\_inchi**(*molecule*, *fixed\_hydrogens*=False)

Create an InChI string for the molecule using the RDKit Toolkit. InChI is a standardised representation that does not capture tautomers unless specified using the fixed hydrogen layer.

For information on InChi see here <https://iupac.org/who-we-are/divisions/division-details/inchi/>

#### Parameters

**molecule** [An openforcefield.topology.Molecule] The molecule to convert into a SMILES.

**fixed\_hydrogens: bool, default=False** If a fixed hydrogen layer should be added to the InChI, if *True* this will produce a non standard specific InChI string of the molecule.

#### Returns

**inchi: str** The InChI string of the molecule.

**to\_inchikey**(*molecule*, *fixed\_hydrogens*=False)

Create an InChIKey for the molecule using the RDKit Toolkit. InChIKey is a standardised representation that does not capture tautomers unless specified using the fixed hydrogen layer.

For information on InChi see here <https://iupac.org/who-we-are/divisions/division-details/inchi/>

#### Parameters

**molecule** [An openforcefield.topology.Molecule] The molecule to convert into a SMILES.

**fixed\_hydrogens: bool, default=False** If a fixed hydrogen layer should be added to the InChI, if *True* this will produce a non standard specific InChI string of the molecule.

#### Returns

**inchi\_key: str** The InChIKey representation of the molecule.

**get\_tagged\_smarts\_connectivity**(*smarts*)

Returns a tuple of tuples indicating connectivity between tagged atoms in a SMARTS string. Does not return bond order.

#### Parameters

**smarts** [str] The tagged SMARTS to analyze

**Returns**

**unique\_tags** [tuple of int] A sorted tuple of all unique tagged atom map indices.

**tagged\_atom\_connectivity** [tuple of tuples of int, shape n\_tagged\_bonds x 2] A tuple of tuples, where each inner tuple is a pair of tagged atoms (tag\_idx\_1, tag\_idx\_2) which are bonded. The inner tuples are ordered smallest-to-largest, and the tuple of tuples is ordered lexically. So the return value for an improper torsion would be ((1, 2), (2, 3), (2, 4)).

**Raises**

**SMIRKSParsingError** If RDKit was unable to parse the provided smirks/tagged smarts

**find\_smarts\_matches**(*molecule*, *smarts*, *aromaticity\_model*='OEArModel\_MDL')

Find all SMARTS matches for the specified molecule, using the specified aromaticity model.

**Warning:** This API is experimental and subject to change.

**Parameters**

**molecule** [openforcefield.topology.Molecule] The molecule for which all specified SMARTS matches are to be located

**smarts** [str] SMARTS string with optional SMIRKS-style atom tagging

**aromaticity\_model** [str, optional, default='OEArModel\_MDL'] Molecule is prepared with this aromaticity model prior to querying.

**.. note :: Currently, the only supported ``aromaticity\_model`` is ``OEArModel\_MDL``**

**find\_rings**(*molecule*)

Find the rings in a given molecule.

---

**Note:** For systems containing some special cases of connected rings, this function may not be well-behaved and may report a different number rings than expected. Some problematic cases include networks of many (5+) rings or bicyclic moieties (i.e. norbornane).

---

**Parameters**

**molecule** [openforcefield.topology.Molecule] The molecule for which rings are to be found

**Returns**

**rings** [tuple of tuples of atom indices] Nested tuples, each containing the indices of atoms in each ring

**property toolkit\_file\_read\_formats**

List of file formats that this toolkit can read.

**property toolkit\_installation\_instructions**

classmethod(function) -> method

Convert a function to be a class method.

A class method receives the class as implicit first argument, just like an instance method receives the instance. To declare a class method, use this idiom:

```
class C: @classmethod def f(cls, arg1, arg2, ...):  
    ...
```

It can be called either on the class (e.g. C.f()) or on an instance (e.g. C().f()). The instance is ignored except for its class. If a class method is called for a derived class, the derived class object is passed as the implied first argument.

Class methods are different than C++ or Java static methods. If you want those, see the `staticmethod` builtin.

**property `toolkit_name`**

Return the name of the toolkit wrapped by this class as a str

**Warning:** This API is experimental and subject to change.

**Returns**

**`toolkit_name`** [str] The name of the wrapped toolkit

**property `toolkit_version`**

Return the version of the wrapped toolkit as a str

**Warning:** This API is experimental and subject to change.

**Returns**

**`toolkit_version`** [str] The version of the wrapped toolkit

## **openforcefield.utils.toolkits.AmberToolsToolkitWrapper**

**class** openforcefield.utils.toolkits.AmberToolsToolkitWrapper  
AmberTools toolkit wrapper

**Warning:** This API is experimental and subject to change.

**Attributes**

**`toolkit_file_read_formats`** List of file formats that this toolkit can read.

**`toolkit_file_write_formats`** List of file formats that this toolkit can write.

**`toolkit_installation_instructions`** classmethod(function) -> method

**`toolkit_name`** Return the name of the toolkit wrapped by this class as a str

**`toolkit_version`** Return the version of the wrapped toolkit as a str

## Methods

<code>assign_fractional_bond_orders(molecule[, ...])</code>	Update and store list of bond orders this molecule.
<code>assign_partial_charges(molecule[, ...])</code>	Compute partial charges with AmberTools using antechamber/sqm, and assign the new values to the <code>partial_charges</code> attribute.
<code>compute_partial_charges_am1bcc(molecule[, ...])</code>	Compute partial charges with AmberTools using antechamber/sqm.
<code>from_file(file_path, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file using this toolkit.
<code>from_file_obj(file_obj, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file-like object (an object with a “ <code>.read()</code> ” method using this
<code>is_available()</code>	Check whether the AmberTools toolkit is installed
<code>requires_toolkit()</code>	

## `__init__()`

Initialize self. See `help(type(self))` for accurate signature.

## Methods

<code>__init__()</code>	Initialize self.
<code>assign_fractional_bond_orders(molecule[, ...])</code>	Update and store list of bond orders this molecule.
<code>assign_partial_charges(molecule[, ...])</code>	Compute partial charges with AmberTools using antechamber/sqm, and assign the new values to the <code>partial_charges</code> attribute.
<code>compute_partial_charges_am1bcc(molecule[, ...])</code>	Compute partial charges with AmberTools using antechamber/sqm.
<code>from_file(file_path, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file using this toolkit.
<code>from_file_obj(file_obj, file_format[, ...])</code>	Return an <code>openforcefield.topology.Molecule</code> from a file-like object (an object with a “ <code>.read()</code> ” method using this
<code>is_available()</code>	Check whether the AmberTools toolkit is installed
<code>requires_toolkit()</code>	

## Attributes

<code>toolkit_file_read_formats</code>	List of file formats that this toolkit can read.
<code>toolkit_file_write_formats</code>	List of file formats that this toolkit can write.
<code>toolkit_installation_instructions</code>	<code>classmethod(function) -&gt; method</code>
<code>toolkit_name</code>	Return the name of the toolkit wrapped by this class as a str

continues on next page

Table 142 – continued from previous page

<code>toolkit_version</code>	Return the version of the wrapped toolkit as a str
------------------------------	--

**static is\_available()**

Check whether the AmberTools toolkit is installed

#### Returns

**is\_installed** [bool] True if AmberTools is installed, False otherwise.

**assign\_partial\_charges**(*molecule*, *partial\_charge\_method*=None, *use\_conformers*=None, *strict\_n\_conformers*=False)

Compute partial charges with AmberTools using antechamber/sqm, and assign the new values to the `partial_charges` attribute.

**Warning:** This API experimental and subject to change.

#### Parameters

**molecule** [openforcefield.topology.Molecule] Molecule for which partial charges are to be computed

**partial\_charge\_method** [str, optional, default=None] The charge model to use. One of ['gasteiger', 'am1bcc', 'am1-mulliken']. If None, 'am1-mulliken' will be used.

**use\_conformers** [iterable of simtk.unit.Quantity-wrapped numpy arrays, each with shape (n\_atoms, 3) and dimension of distance. Optional, default = None] List of (n\_atoms x 3) simtk.unit.Quantities to use for partial charge calculation. If None, an appropriate number of conformers will be generated.

**strict\_n\_conformers** [bool, default=False] Whether to raise an exception if an invalid number of conformers is provided for the given charge method. If this is False and an invalid number of conformers is found, a warning will be raised.

#### Raises

**ChargeMethodUnavailableError** if the requested charge method can not be handled by this toolkit

**ChargeCalculationError** if the charge method is supported by this toolkit, but fails

**compute\_partial\_charges\_am1bcc**(*molecule*, *use\_conformers*=None, *strict\_n\_conformers*=False)

Compute partial charges with AmberTools using antechamber/sqm. This will calculate AM1-BCC charges on the first conformer only.

**Warning:** This API is experimental and subject to change.

#### Parameters

**molecule** [Molecule] Molecule for which partial charges are to be computed

**use\_conformers** [iterable of simtk.unit.Quantity-wrapped numpy arrays, each with shape (n\_atoms, 3) and dimension of distance. Optional, default = None] Coordinates to use for partial charge calculation. If None, an appropriate number of conformers will be generated.



**strict\_n\_conformers** [bool, default=False] Whether to raise an exception if an invalid number of conformers is provided. If this is False and an invalid number of conformers is found, a warning will be raised instead of an Exception.

#### Returns

**charges** [numpy.array of shape (natoms) of type float] The partial charges

**assign\_fractional\_bond\_orders**(*molecule*, *bond\_order\_model*=None, *use\_conformers*=None)

Update and store list of bond orders this molecule. Bond orders are stored on each bond, in the *bond.fractional\_bond\_order* attribute.

**Warning:** This API is experimental and subject to change.

#### Parameters

**molecule** [openforcefield.topology.molecule Molecule] The molecule to assign wiberg bond orders to

**bond\_order\_model** [str, optional, default=None] The charge model to use. Only allowed value is 'am1-wiberg'. If None, 'am1-wiberg' will be used.

**use\_conformers** [iterable of simtk.unit.Quantity(np.array) with shape (n\_atoms, 3) and dimension of distance, optional, default=None] The conformers to use for fractional bond order calculation. If None, an appropriate number of conformers will be generated by an available ToolkitWrapper.

**from\_file**(*file\_path*, *file\_format*, *allow\_undefined\_stereo*=False)

Return an openforcefield.topology.Molecule from a file using this toolkit.

#### Parameters

**file\_path** [str] The file to read the molecule from

**file\_format** [str] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for details.

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if any molecules contain undefined stereochemistry.

#### Returns

\_\_\_\_\_

**molecules** [Molecule or list of Molecules] a list of Molecule objects is returned.

**from\_file\_obj**(*file\_obj*, *file\_format*, *allow\_undefined\_stereo*=False)

Return an openforcefield.topology.Molecule from a file-like object (an object with a ".read()" method using toolkit.

#### Parameters

**file\_obj** [file-like object] The file-like object to read the molecule from

**file\_format** [str] Format specifier, usually file suffix (eg. 'MOL2', 'SMI') Note that not all toolkits support all formats. Check ToolkitWrapper.toolkit\_file\_read\_formats for details.

**allow\_undefined\_stereo** [bool, default=False] If false, raises an exception if any molecules contain undefined stereochemistry. If false, the function skips loading the molecule.

#### Returns

**molecules** [Molecule or list of Molecules] a list of Molecule objects is returned.

#### property **toolkit\_file\_read\_formats**

List of file formats that this toolkit can read.

#### property **toolkit\_file\_write\_formats**

List of file formats that this toolkit can write.

#### property **toolkit\_installation\_instructions**

classmethod(function) -> method

Convert a function to be a class method.

A class method receives the class as implicit first argument, just like an instance method receives the instance. To declare a class method, use this idiom:

```
class C: @classmethod def f(cls, arg1, arg2, ...):
```

...

It can be called either on the class (e.g. C.f()) or on an instance (e.g. C().f()). The instance is ignored except for its class. If a class method is called for a derived class, the derived class object is passed as the implied first argument.

Class methods are different than C++ or Java static methods. If you want those, see the staticmethod builtin.

#### property **toolkit\_name**

Return the name of the toolkit wrapped by this class as a str

**Warning:** This API is experimental and subject to change.

#### Returns

**toolkit\_name** [str] The name of the wrapped toolkit

#### property **toolkit\_version**

Return the version of the wrapped toolkit as a str

**Warning:** This API is experimental and subject to change.

#### Returns

**toolkit\_version** [str] The version of the wrapped toolkit

## 2.3.2 Serialization support

<code>Serializable</code>	Mix-in to add serialization and deserialization support via JSON, YAML, BSON, TOML, MessagePack, and XML.
---------------------------	---

### `openforcefield.utils.serialization.Serializable`

**class** `openforcefield.utils.serialization.Serializable`

Mix-in to add serialization and deserialization support via JSON, YAML, BSON, TOML, MessagePack, and XML.

For more information on these formats, see: [JSON](#), [BSON](#), [YAML](#), [TOML](#), [MessagePack](#), and [XML](#).

To use this mix-in, the class inheriting from this class must have implemented `to_dict()` and `from_dict()` methods that utilize dictionaries containing only serializable Python objects.

**Warning:** The serialization/deserialization schemes used here place some strict constraints on what kinds of dict objects can be serialized. No effort is made to add further protection to ensure serialization is possible. Use with caution.

### Examples

Example class using `Serializable` mix-in:

```
>>> from openforcefield.utils.serialization import Serializable
>>> class Thing(Serializable):
...     def __init__(self, description):
...         self.description = description
...
...     def to_dict(self):
...         return { 'description' : self.description }
...
...     @classmethod
...     def from_dict(cls, d):
...         return cls(d['description'])
...
>>> # Create an example object
>>> thing = Thing('blorb')
```

Get [JSON](#) representation:

```
>>> json_thing = thing.to_json()
```

Reconstruct an object from its [JSON](#) representation:

```
>>> thing_from_json = Thing.from_json(json_thing)
```

Get [BSON](#) representation:

```
>>> bson_thing = thing.to_bson()
```

Reconstruct an object from its [BSON](#) representation:

```
>>> thing_from_bson = Thing.from_bson(bson_thing)
```

Get [YAML](#) representation:

```
>>> yaml_thing = thing.to_yaml()
```

Reconstruct an object from its [YAML](#) representation:

```
>>> thing_from_yaml = Thing.from_yaml(yaml_thing)
```

Get [MessagePack](#) representation:

```
>>> messagepack_thing = thing.to_messagepack()
```

Reconstruct an object from its [MessagePack](#) representation:

```
>>> thing_from_messagepack = Thing.from_messagepack(messagepack_thing)
```

Get [XML](#) representation:

```
>>> xml_thing = thing.to_xml()
```

## Methods

<a href="#">from_bson</a> (serialized)	Instantiate an object from a BSON serialized representation.
<a href="#">from_json</a> (serialized)	Instantiate an object from a JSON serialized representation.
<a href="#">from_messagepack</a> (serialized)	Instantiate an object from a MessagePack serialized representation.
<a href="#">from_pickle</a> (serialized)	Instantiate an object from a pickle serialized representation.
<a href="#">from_toml</a> (serialized)	Instantiate an object from a TOML serialized representation.
<a href="#">from_xml</a> (serialized)	Instantiate an object from an XML serialized representation.
<a href="#">from_yaml</a> (serialized)	Instantiate from a YAML serialized representation.
<a href="#">to_bson</a> ()	Return a BSON serialized representation.
<a href="#">to_json</a> ([indent])	Return a JSON serialized representation.
<a href="#">to_messagepack</a> ()	Return a MessagePack representation.
<a href="#">to_pickle</a> ()	Return a pickle serialized representation.
<a href="#">to_toml</a> ()	Return a TOML serialized representation.
<a href="#">to_xml</a> ([indent])	Return an XML representation.
<a href="#">to_yaml</a> ()	Return a YAML serialized representation.

<a href="#">from_dict</a>	
<a href="#">to_dict</a>	

[\\_\\_init\\_\\_](#)(\*args, \*\*kwargs)

Initialize self. See `help(type(self))` for accurate signature.

## Methods

<code>__init__(*args, **kwargs)</code>	Initialize self.
<code>from_bson(serialized)</code>	Instantiate an object from a BSON serialized representation.
<code>from_dict(d)</code>	
<code>from_json(serialized)</code>	Instantiate an object from a JSON serialized representation.
<code>from_messagepack(serialized)</code>	Instantiate an object from a MessagePack serialized representation.
<code>from_pickle(serialized)</code>	Instantiate an object from a pickle serialized representation.
<code>from_toml(serialized)</code>	Instantiate an object from a TOML serialized representation.
<code>from_xml(serialized)</code>	Instantiate an object from an XML serialized representation.
<code>from_yaml(serialized)</code>	Instantiate from a YAML serialized representation.
<code>to_bson()</code>	Return a BSON serialized representation.
<code>to_dict()</code>	
<code>to_json([indent])</code>	Return a JSON serialized representation.
<code>to_messagepack()</code>	Return a MessagePack representation.
<code>to_pickle()</code>	Return a pickle serialized representation.
<code>to_toml()</code>	Return a TOML serialized representation.
<code>to_xml([indent])</code>	Return an XML representation.
<code>to_yaml()</code>	Return a YAML serialized representation.

**to\_json(indent=None)**

Return a JSON serialized representation.

Specification: <https://www.json.org/>

### Parameters

**indent** [int, optional, default=None] If not None, will pretty-print with specified number of spaces for indentation

### Returns

**serialized** [str] A JSON serialized representation of the object

**classmethod from\_json(serialized)**

Instantiate an object from a JSON serialized representation.

Specification: <https://www.json.org/>

### Parameters

**serialized** [str] A JSON serialized representation of the object

### Returns

**instance** [cls] An instantiated object

**to\_bson()**

Return a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Returns**

**serialized** [bytes] A BSON serialized representation of the object

**classmethod from\_bson**(*serialized*)

Instantiate an object from a BSON serialized representation.

Specification: <http://bsonspec.org/>

**Parameters**

**serialized** [bytes] A BSON serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**to\_toml**()

Return a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Returns**

**serialized** [str] A TOML serialized representation of the object

**classmethod from\_toml**(*serialized*)

Instantiate an object from a TOML serialized representation.

Specification: <https://github.com/toml-lang/toml>

**Parameters**

**serialized** [str] A TOML serialized representation of the object

**Returns**

**instance** [cls] An instantiated object

**to\_yaml**()

Return a YAML serialized representation.

Specification: <http://yaml.org/>

**Returns**

**serialized** [str] A YAML serialized representation of the object

**classmethod from\_yaml**(*serialized*)

Instantiate from a YAML serialized representation.

Specification: <http://yaml.org/>

**Parameters**

**serialized** [str] A YAML serialized representation of the object

**Returns**

**instance** [cls] Instantiated object

**to\_messagepack**()

Return a MessagePack representation.

Specification: <https://msgpack.org/index.html>

**Returns**

**serialized** [bytes] A MessagePack-encoded bytes serialized representation of the object

**classmethod from\_messagepack**(*serialized*)

Instantiate an object from a MessagePack serialized representation.

Specification: <https://msgpack.org/index.html>

#### Parameters

**serialized** [bytes] A MessagePack-encoded bytes serialized representation

#### Returns

**instance** [cls] Instantiated object.

**to\_xml**(*indent=2*)

Return an XML representation.

Specification: <https://www.w3.org/XML/>

#### Parameters

**indent** [int, optional, default=2] If not None, will pretty-print with specified number of spaces for indentation

#### Returns

**serialized** [bytes] A MessagePack-encoded bytes serialized representation.

**classmethod from\_xml**(*serialized*)

Instantiate an object from an XML serialized representation.

Specification: <https://www.w3.org/XML/>

#### Parameters

**serialized** [bytes] An XML serialized representation

#### Returns

**instance** [cls] Instantiated object.

**to\_pickle**()

Return a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

#### Returns

**serialized** [str] A pickled representation of the object

**classmethod from\_pickle**(*serialized*)

Instantiate an object from a pickle serialized representation.

**Warning:** This is not recommended for safe, stable storage since the pickle specification may change between Python versions.

#### Parameters

**serialized** [str] A pickled representation of the object

#### Returns

**instance** [cls] An instantiated object

### 2.3.3 Miscellaneous utilities

Miscellaneous utility functions.

<code>inherit_docstrings</code>	Inherit docstrings from parent class
<code>all_subclasses</code>	Recursively retrieve all subclasses of the specified class
<code>temporary_cd</code>	Context to temporarily change the working directory. Parameters ——— <code>dir_path</code> : str The directory path to enter within the context Examples ——— <code>&gt;&gt;&gt; dir_path = '/tmp' &gt;&gt;&gt; with temporary_cd(dir_path): ... pass # do something in dir_path.</code>
<code>get_data_file_path</code>	Get the full path to one of the reference files in testsystems. In the source distribution, these files are in openforcefield/data/, but on installation, they're moved to somewhere in the user's python site-packages directory. Parameters ——— <code>name</code> : str Name of the file to load (with respect to the repex folder).
<code>convert_0_1_smirnoff_to_0_2</code>	Convert an 0.1-compliant SMIRNOFF dict to an 0.2-compliant one.
<code>convert_0_2_smirnoff_to_0_3</code>	Convert an 0.2-compliant SMIRNOFF dict to an 0.3-compliant one.
<code>get_molecule_parameterIDs</code>	Process a list of molecules with a specified SMIRNOFF ffxml file and determine which parameters are used by which molecules, returning collated results.

#### openforcefield.utils.utils.inherit\_docstrings

openforcefield.utils.utils.inherit\_docstrings(*cls*)

Inherit docstrings from parent class



### openforcefield.utils.utils.all\_subclasses

`openforcefield.utils.utils.all_subclasses(cls)`  
 Recursively retrieve all subclasses of the specified class

### openforcefield.utils.utils.temporary\_cd

`openforcefield.utils.utils.temporary_cd(dir_path)`  
 Context to temporarily change the working directory. Parameters ——— `dir_path : str`  
 The directory path to enter within the context

```
>>> dir_path = '/tmp'
>>> with temporary_cd(dir_path):
...     pass # do something in dir_path
```

### openforcefield.utils.utils.get\_data\_file\_path

`openforcefield.utils.utils.get_data_file_path(relative_path)`  
 Get the full path to one of the reference files in testsystems. In the source distribution, these files are in `openforcefield/data/`, but on installation, they're moved to somewhere in the user's python site-packages directory. Parameters ——— `name : str`  
 Name of the file to load (with respect to the repex folder).

### openforcefield.utils.utils.convert\_0\_1\_smirnoff\_to\_0\_2

`openforcefield.utils.utils.convert_0_1_smirnoff_to_0_2(smirnoff_data_0_1)`  
 Convert an 0.1-compliant SMIRNOFF dict to an 0.2-compliant one. This involves renaming several tags, adding Electrostatics and ToolkitAM1BCC tags, and separating improper torsions into their own section.

#### Parameters

**smirnoff\_data\_0\_1** [dict] Hierarchical dict representing a SMIRNOFF data structure according to the 0.1 spec

#### Returns

**smirnoff\_data\_0\_2** Hierarchical dict representing a SMIRNOFF data structure according to the 0.2 spec

### openforcefield.utils.utils.convert\_0\_2\_smirnoff\_to\_0\_3

`openforcefield.utils.utils.convert_0_2_smirnoff_to_0_3(smirnoff_data_0_2)`  
 Convert an 0.2-compliant SMIRNOFF dict to an 0.3-compliant one. This involves removing units from header tags and adding them to attributes of child elements. It also requires converting ProperTorsions and ImproperTorsions potentials from “charmm” to “fourier”.

#### Parameters

**smirnoff\_data\_0\_2** [dict] Hierarchical dict representing a SMIRNOFF data structure according to the 0.2 spec

#### Returns

**smirnoff\_data\_0\_3** Hierarchical dict representing a SMIRNOFF data structure according to the 0.3 spec

#### `openforcefield.utils.utils.get_molecule_parameterIDs`

`openforcefield.utils.utils.get_molecule_parameterIDs(molecules, forcefield)`

Process a list of molecules with a specified SMIRNOFF ffxml file and determine which parameters are used by which molecules, returning collated results.

##### Parameters

**molecules** [list of `openforcefield.topology.Molecule`] List of molecules (with explicit hydrogens) to parse

**forcefield** [`openforcefield.typing.engines.smirnoff.ForceField`] The `ForceField` to apply

##### Returns

**parameters\_by\_molecule** [dict] Parameter IDs used in each molecule, keyed by isomeric SMILES generated from provided OEMols. Each entry in the dict is a list which does not necessarily have unique entries; i.e. parameter IDs which are used more than once will occur multiple times.

**parameters\_by\_ID** [dict] Molecules in which each parameter ID occur, keyed by parameter ID. Each entry in the dict is a set of isomeric SMILES for molecules in which that parameter occurs. No frequency information is stored.

## Symbols

`__init__()` (*openforcefield.topology.Atom* method), 150  
`__init__()` (*openforcefield.topology.Bond* method), 156  
`__init__()` (*openforcefield.topology.BondChargeVirtualSite* method), 179  
`__init__()` (*openforcefield.topology.DivalentLonePairVirtualSite* method), 192  
`__init__()` (*openforcefield.topology.FrozenMolecule* method), 65  
`__init__()` (*openforcefield.topology.ImproperDict* method), 224  
`__init__()` (*openforcefield.topology.Molecule* method), 94  
`__init__()` (*openforcefield.topology.MonovalentLonePairVirtualSite* method), 186  
`__init__()` (*openforcefield.topology.Particle* method), 145  
`__init__()` (*openforcefield.topology.Topology* method), 126  
`__init__()` (*openforcefield.topology.TopologyAtom* method), 205  
`__init__()` (*openforcefield.topology.TopologyBond* method), 211  
`__init__()` (*openforcefield.topology.TopologyMolecule* method), 140  
`__init__()` (*openforcefield.topology.TopologyVirtualParticle* method), 172  
`__init__()` (*openforcefield.topology.TopologyVirtualSite* method), 216  
`__init__()` (*openforcefield.topology.TrivalentLonePairVirtualSite* method), 199  
`__init__()` (*openforcefield.topology.ValenceDict* method), 222  
`__init__()` (*openforcefield.topology.VirtualParticle* method), 167  
`__init__()` (*openforcefield.topology.VirtualSite* method), 162  
`__init__()` (*openforcefield.typing.chemistry.ChemicalEnvironment* method), 226  
`__init__()` (*openforcefield.typing.engines.smirnoff.forcefield.ForceField* method), 231  
`__init__()` (*openforcefield.typing.engines.smirnoff.io.ParameterIOHandler* method), 441  
`__init__()` (*openforcefield.typing.engines.smirnoff.io.XMLParameterIOHandler* method), 442  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.AngleHandler* method), 279  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.BondHandler* method), 259  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler* method), 385  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.GBSAHandler* method), 427  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler* method), 323  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.IndexedMappedParameter* method), 451  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.IndexedParameterAttribute* method), 448  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler* method), 393  
`__init__()` (*openforcefield.typing.engines.smirnoff.parameters.MappedParameterAttribute* method), 449

<code>__init__()</code>	( <i>openforcefield.typing.engines.smirnoff.parameters.ParameterAttribute</i> method), 290	<i>field.typing.engines.smirnoff.parameters.AngleHandler</i>
<code>__init__()</code>	( <i>openforcefield.typing.engines.smirnoff.parameters.ParameterHandler</i> method), 248	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.AngleHandler.AngleType</i> method), 289
<code>__init__()</code>	( <i>openforcefield.typing.engines.smirnoff.parameters.ParameterList</i> method), 243	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.BondHandler</i> method), 272
<code>__init__()</code>	( <i>openforcefield.typing.engines.smirnoff.parameters.ParameterType</i> method), 240	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.BondHandler.BondType</i> method), 270
<code>__init__()</code>	( <i>openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler</i> method), 302	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler</i> method), 387
<code>__init__()</code>	( <i>openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler</i> method), 409	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.GBSAHandler</i> method), 437
<code>__init__()</code>	( <i>openforcefield.typing.engines.smirnoff.parameters.vdWHandler</i> method), 355	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.GBSAHandler.GBSAType</i> method), 436
<code>__init__()</code>	( <i>openforcefield.utils.serialization.Serializable</i> method), 488	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler</i> method), 335
<code>__init__()</code>	( <i>openforcefield.utils.toolkits.AmberToolsToolkitWrapper</i> method), 483	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler</i> method), 333
<code>__init__()</code>	( <i>openforcefield.utils.toolkits.OpenEyeToolkitWrapper</i> method), 462	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler</i> method), 403
<code>__init__()</code>	( <i>openforcefield.utils.toolkits.RDKitToolkitWrapper</i> method), 474	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler</i> method), 402
<code>__init__()</code>	( <i>openforcefield.utils.toolkits.ToolkitRegistry</i> method), 454	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.ParameterHandler</i> method), 251
<code>__init__()</code>	( <i>openforcefield.utils.toolkits.ToolkitWrapper</i> method), 458	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.ParameterType</i> method), 241
<b>A</b>		<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler</i> method), 314
<code>add_atom()</code>	( <i>openforcefield.topology.Molecule</i> method), 99	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler</i> method), 313
<code>add_bond()</code>	( <i>openforcefield.topology.Atom</i> method), 152	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler</i> method), 411
<code>add_bond()</code>	( <i>openforcefield.topology.Molecule</i> method), 101	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.vdWHandler</i> method), 368
<code>add_bond_charge_virtual_site()</code>	( <i>openforcefield.topology.Molecule</i> method), 99	<i>add_cosmetic_attribute()</i> ( <i>openforcefield.typing.engines.smirnoff.parameters.vdWHandler.vdWType</i> method), 366
<code>add_conformer()</code>	( <i>openforcefield.topology.Molecule</i> method), 102	<code>add_divalent_lone_pair_virtual_site()</code> ( <i>open-</i>
<code>add_constraint()</code>	( <i>openforcefield.topology.Topology</i> method), 138	
<code>add_cosmetic_attribute()</code>	( <i>openforce-</i>	

`forcefield.topology.Molecule` method), 100  
`add_molecule()` (`openforcefield.topology.Topology` method), 138  
`add_monovalent_lone_pair_virtual_site()` (`openforcefield.topology.Molecule` method), 100  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.AngleHandler` method), 290  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.BondHandler` method), 272  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler` method), 388  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.GBSAHandler` method), 438  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler` method), 335  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler` method), 404  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.ParameterHandler` method), 249  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler` method), 315  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler` method), 411  
`add_parameter()` (`openforcefield.typing.engines.smirnoff.parameters.vdWHandler` method), 368  
`add_particle()` (`openforcefield.topology.Topology` method), 135  
`add_toolkit()` (`openforcefield.utils.toolkits.ToolkitRegistry` method), 456  
`add_trivalent_lone_pair_virtual_site()` (`openforcefield.topology.Molecule` method), 101  
`add_virtual_site()` (`openforcefield.topology.Atom` method), 152  
`all_subclasses()` (in module `openforcefield.utils.utils`), 493  
`AmberToolsToolkitWrapper` (class in `openforcefield.utils.toolkits`), 482  
`AngleHandler` (class in `openforcefield.typing.engines.smirnoff.parameters`), 275  
`AngleHandler.AngleType` (class in `openforcefield.typing.engines.smirnoff.parameters`), 280  
`angles()` (`openforcefield.topology.FrozenMolecule` property), 78  
`angles()` (`openforcefield.topology.Molecule` property), 102  
`angles()` (`openforcefield.topology.Topology` property), 132  
`angles()` (`openforcefield.topology.TopologyMolecule` property), 143  
`append()` (`openforcefield.typing.engines.smirnoff.parameters.ParameterHandler` method), 244  
`are_isomorphic()` (`openforcefield.topology.FrozenMolecule` static method), 77  
`are_isomorphic()` (`openforcefield.topology.Molecule` static method), 102  
`aromaticity_model()` (`openforcefield.topology.Topology` property), 130  
`aromaticity_model()` (`openforcefield.typing.engines.smirnoff.forcefield.ForceField` property), 233  
`assert_bonded()` (`openforcefield.topology.Topology` method), 130  
`assign_charge_from_molecules()` (`openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler` method), 387  
`assign_fractional_bond_orders()` (`openforcefield.topology.FrozenMolecule` method), 77  
`assign_fractional_bond_orders()` (`openforcefield.topology.Molecule` method), 103  
`assign_fractional_bond_orders()` (`openforcefield.utils.toolkits.AmberToolsToolkitWrapper` method), 485  
`assign_fractional_bond_orders()` (`openforcefield.utils.toolkits.OpenEyeToolkitWrapper` method), 471  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.AngleHandler` method), 291  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.BondHandler` method), 273  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler` method), 388  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.GBSAHandler` method), 438  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler` method), 336  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler` method), 404

`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.ParameterHandler` method), 251  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler` method), 315  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler` method), 412  
`assign_parameters()` (`openforcefield.typing.engines.smirnoff.parameters.vdWHandler` method), 369  
`assign_partial_charges()` (`openforcefield.topology.FrozenMolecule` method), 75  
`assign_partial_charges()` (`openforcefield.topology.Molecule` method), 103  
`assign_partial_charges()` (`openforcefield.utils.toolkits.AmberToolsToolkitWrapper` method), 484  
`assign_partial_charges()` (`openforcefield.utils.toolkits.OpenEyeToolkitWrapper` method), 470  
`Atom` (class in `openforcefield.topology`), 149  
`atom()` (`openforcefield.topology.Topology` method), 135  
`atom()` (`openforcefield.topology.TopologyAtom` property), 206  
`atom()` (`openforcefield.topology.TopologyMolecule` method), 142  
`atom()` (`openforcefield.topology.TopologyVirtualParticle` method), 174  
`atom()` (`openforcefield.topology.TopologyVirtualSite` method), 218  
`atom_start_topology_index()` (`openforcefield.topology.TopologyMolecule` property), 142  
`atomic_number()` (`openforcefield.topology.Atom` property), 152  
`atomic_number()` (`openforcefield.topology.TopologyAtom` property), 206  
`atoms()` (`openforcefield.topology.BondChargeVirtualSite` property), 181  
`atoms()` (`openforcefield.topology.DivalentLonePairVirtualSite` property), 194  
`atoms()` (`openforcefield.topology.FrozenMolecule` property), 78  
`atoms()` (`openforcefield.topology.Molecule` property), 104  
`atoms()` (`openforcefield.topology.MonovalentLonePairVirtualSite` property), 188  
`atoms()` (`openforcefield.topology.TopologyBond` property), 212  
`atoms()` (`openforcefield.topology.TopologyMolecule` property), 142  
`atoms()` (`openforcefield.topology.TopologyVirtualParticle` property), 174  
`atoms()` (`openforcefield.topology.TopologyVirtualSite` property), 218  
`atoms()` (`openforcefield.topology.TrivalentLonePairVirtualSite` property), 201  
`atoms()` (`openforcefield.topology.VirtualSite` property), 163  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.AngleHandler` method), 291  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.AngleHandler.AngleType` method), 289  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.BondHandler` method), 273  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.BondHandler.BondType` method), 271  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler` method), 389  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.GBSAHandler` method), 439  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.GBSAHandler.GBSAType` method), 436  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler` method), 336  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler.ImproperTorsionType` method), 334  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler` method), 405  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler.LibraryChargeType` method), 402  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.ParameterHandler` method), 251  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.ParameterType` method), 241  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler` method), 316  
`attribute_is_cosmetic()` (`openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler.ProperTorsionType` method), 316



- method), 313
- attribute\_is\_cosmetic() (openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler method), 468
- attribute\_is\_cosmetic() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler method), 412
- attribute\_is\_cosmetic() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler.vdWType method), 369
- attribute\_is\_cosmetic() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler.vdWType method), 367
- author() (openforcefield.typing.engines.smirnoff.forcefield.ForceField property), 233
- ## B
- Bond (class in openforcefield.topology), 156
- bond() (openforcefield.topology.Topology method), 135
- bond() (openforcefield.topology.TopologyBond property), 212
- bond() (openforcefield.topology.TopologyMolecule method), 142
- bond\_order() (openforcefield.topology.TopologyBond property), 212
- bond\_start\_topology\_index() (openforcefield.topology.TopologyMolecule property), 142
- BondChargeVirtualSite (class in openforcefield.topology), 178
- bonded\_atoms() (openforcefield.topology.Atom property), 152
- BondHandler (class in openforcefield.typing.engines.smirnoff.parameters), 252
- BondHandler.BondType (class in openforcefield.typing.engines.smirnoff.parameters), 260
- bonds() (openforcefield.topology.Atom property), 152
- bonds() (openforcefield.topology.FrozenMolecule property), 78
- bonds() (openforcefield.topology.Molecule property), 104
- bonds() (openforcefield.topology.TopologyMolecule property), 142
- box\_vectors() (openforcefield.topology.Topology property), 130
- ## C
- call() (openforcefield.utils.toolkits.ToolkitRegistry method), 457
- canonical\_order\_atoms() (openforcefield.topology.FrozenMolecule method), 86
- canonical\_order\_atoms() (openforcefield.topology.Molecule method), 104
- canonical\_order\_atoms() (openforcefield.topology.FrozenMolecule method), 468
- canonical\_order\_atoms() (openforcefield.topology.RDKitToolkitWrapper method), 477
- charge\_increments() (openforcefield.topology.BondChargeVirtualSite property), 181
- charge\_increments() (openforcefield.topology.DivalentLonePairVirtualSite property), 195
- charge\_increments() (openforcefield.topology.MonovalentLonePairVirtualSite property), 188
- charge\_increments() (openforcefield.topology.TrivalentLonePairVirtualSite property), 201
- charge\_increments() (openforcefield.topology.VirtualSite property), 163
- charge\_model() (openforcefield.topology.Topology property), 130
- check\_charges\_assigned() (openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler static method), 389
- check\_charges\_assigned() (openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler static method), 405
- check\_charges\_assigned() (openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler static method), 413
- check\_charges\_assigned() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler static method), 369
- check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.AngleHandler method), 290
- check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.BondHandler method), 271
- check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler method), 387
- check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.GBSAHandler method), 437
- check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler method), 334
- check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler method), 405
- check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.ParameterHandler

method), 249

check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler method), 314

check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.ToolkitsAmberHandler method), 410

check\_handler\_compatibility() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler method), 367

chemical\_environment\_matches() (openforcefield.topology.FrozenMolecule method), 79

chemical\_environment\_matches() (openforcefield.topology.Molecule method), 104

chemical\_environment\_matches() (openforcefield.topology.Topology method), 132

ChemicalEnvironment (class in openforcefield.typing.chemistry), 226

clear() (openforcefield.topology.ImproperDict method), 225

clear() (openforcefield.topology.ValenceDict method), 223

clear() (openforcefield.typing.engines.smirnoff.parameters.ParameterList method), 245

compute\_partial\_charges\_am1bcc() (openforcefield.topology.FrozenMolecule method), 75

compute\_partial\_charges\_am1bcc() (openforcefield.topology.Molecule method), 105

compute\_partial\_charges\_am1bcc() (openforcefield.utils.toolkits.AmberToolsToolkitWrapper method), 484

compute\_partial\_charges\_am1bcc() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 470

conformers() (openforcefield.topology.FrozenMolecule property), 78

conformers() (openforcefield.topology.Molecule property), 105

constrained\_atom\_pairs() (openforcefield.topology.Topology property), 130

convert\_0\_1\_smirnoff\_to\_0\_2() (in module openforcefield.utils.utils), 493

convert\_0\_2\_smirnoff\_to\_0\_3() (in module openforcefield.utils.utils), 493

converter() (openforcefield.typing.engines.smirnoff.parameters.IndexedMappedParameterAttribute method), 452

converter() (openforcefield.typing.engines.smirnoff.parameters.IndexedParameterAttribute method), 448

converter() (openforcefield.typing.engines.smirnoff.parameters.MappedParameterAttribute method), 450

field.typing.engines.smirnoff.parameters.ParameterAttribute (openforcefield.typing.engines.smirnoff.parameters.ParameterList method), 446

field.typing.engines.smirnoff.parameters.ParameterList (openforcefield.typing.engines.smirnoff.parameters.ParameterList method), 245

count() (openforcefield.typing.engines.smirnoff.parameters.ParameterList method), 245

create\_openmm\_system() (openforcefield.typing.engines.smirnoff.forcefield.ForceField method), 236

create\_parmed\_structure() (openforcefield.typing.engines.smirnoff.forcefield.ForceField method), 236

## D

date() (openforcefield.typing.engines.smirnoff.forcefield.ForceField property), 233

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.AngleHandler method), 291

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.AngleHandler.AngleType method), 289

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.BondHandler method), 273

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.BondHandler.BondType method), 271

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler method), 389

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.GBSAHandler method), 439

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.GBSAHandler.GBSAType method), 437

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler method), 336

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler.ImproperTorsionType method), 334

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler method), 405

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler.LibraryChargeType method), 403

delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.ParameterHandler method), 403



- method), 252
- delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.ParameterType method), 241
- delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler method), 316
- delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandlerImproperTorsionType method), 314
- delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.ToolkitsAMBCGHandler method), 413
- delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler method), 370
- delete\_cosmetic\_attribute() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler.vdWType method), 367
- deregister\_toolkit() (openforcefield.utils.toolkits.ToolkitRegistry method), 456
- distance() (openforcefield.topology.BondChargeVirtualSite property), 181
- distance() (openforcefield.topology.DivalentLonePairVirtualSite property), 194
- distance() (openforcefield.topology.MonovalentLonePairVirtualSite property), 187
- distance() (openforcefield.topology.TrivalentLonePairVirtualSite property), 201
- DivalentLonePairVirtualSite (class in openforcefield.topology), 191
- ## E
- ElectrostaticsHandler (class in openforcefield.typing.engines.smirnoff.parameters), 371
- element() (openforcefield.topology.Atom property), 152
- enumerate\_protomers() (openforcefield.topology.FrozenMolecule method), 83
- enumerate\_protomers() (openforcefield.topology.Molecule method), 105
- enumerate\_protomers() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 465
- enumerate\_stereoisomers() (openforcefield.topology.FrozenMolecule method), 82
- enumerate\_stereoisomers() (openforcefield.topology.Molecule method), 106
- enumerate\_stereoisomers() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 465
- enumerate\_stereoisomers() (openforcefield.utils.toolkits.RDKitToolkitWrapper method), 477
- EnumerateImproperTorsionType (openforcefield.topology.FrozenMolecule method), 82
- enumerate\_tautomers() (openforcefield.topology.Molecule method), 106
- enumerate\_tautomers() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 465
- enumerate\_tautomers() (openforcefield.utils.toolkits.RDKitToolkitWrapper method), 477
- epsilon() (openforcefield.topology.BondChargeVirtualSite property), 181
- epsilon() (openforcefield.topology.DivalentLonePairVirtualSite property), 195
- epsilon() (openforcefield.topology.MonovalentLonePairVirtualSite property), 188
- epsilon() (openforcefield.topology.TrivalentLonePairVirtualSite property), 201
- epsilon() (openforcefield.topology.VirtualSite property), 163
- extend() (openforcefield.typing.engines.smirnoff.parameters.ParameterType method), 244
- ## F
- find\_matches() (openforcefield.typing.engines.smirnoff.parameters.AngleHandler method), 292
- find\_matches() (openforcefield.typing.engines.smirnoff.parameters.BondHandler method), 274
- find\_matches() (openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler method), 389
- find\_matches() (openforcefield.typing.engines.smirnoff.parameters.GBSAHandler method), 439
- find\_matches() (openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler method), 335
- find\_matches() (openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler method), 335

method), 403

find\_matches() (openforcefield.typing.engines.smirnoff.parameters.ParameterHandler method), 250

find\_matches() (openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler method), 316

find\_matches() (openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler method), 413

find\_matches() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler method), 370

find\_rings() (openforcefield.utils.toolkits.RDKitToolkitWrapper method), 481

find\_rotatable\_bonds() (openforcefield.topology.FrozenMolecule method), 77

find\_rotatable\_bonds() (openforcefield.topology.Molecule method), 106

find\_smarts\_matches() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 471

find\_smarts\_matches() (openforcefield.utils.toolkits.RDKitToolkitWrapper method), 481

ForceField (class in openforcefield.typing.engines.smirnoff.forcefield), 229

formal\_charge() (openforcefield.topology.Atom property), 152

fractional\_bond\_order\_model() (openforcefield.topology.Topology property), 130

from\_bson() (openforcefield.topology.Atom class method), 153

from\_bson() (openforcefield.topology.Bond class method), 158

from\_bson() (openforcefield.topology.BondChargeVirtualSite class method), 181

from\_bson() (openforcefield.topology.DivalentLonePairVirtualSite class method), 195

from\_bson() (openforcefield.topology.FrozenMolecule class method), 87

from\_bson() (openforcefield.topology.Molecule class method), 107

from\_bson() (openforcefield.topology.MonovalentLonePairVirtualSite class method), 188

from\_bson() (openforcefield.topology.Particle class method), 146

from\_bson() (openforcefield.topology.Topology class method), 135

from\_bson() (openforcefield.topology.TopologyAtom class method), 207

from\_bson() (openforcefield.topology.TopologyBond class method), 212

from\_bson() (openforcefield.topology.TopologyVirtualParticle class method), 174

from\_bson() (openforcefield.topology.TopologyVirtualSite class method), 219

from\_bson() (openforcefield.topology.TrivalentLonePairVirtualSite class method), 201

from\_bson() (openforcefield.topology.VirtualParticle class method), 168

from\_bson() (openforcefield.topology.VirtualSite class method), 164

from\_bson() (openforcefield.utils.serialization.Serializable class method), 490

from\_dict() (openforcefield.topology.Atom class method), 152

from\_dict() (openforcefield.topology.Bond class method), 157

from\_dict() (openforcefield.topology.BondChargeVirtualSite class method), 181

from\_dict() (openforcefield.topology.DivalentLonePairVirtualSite class method), 194

from\_dict() (openforcefield.topology.FrozenMolecule class method), 70

from\_dict() (openforcefield.topology.Molecule class method), 107

from\_dict() (openforcefield.topology.MonovalentLonePairVirtualSite class method), 187

from\_dict() (openforcefield.topology.Particle class method), 146

from\_dict() (openforcefield.topology.Topology class method), 132

from\_dict() (openforcefield.topology.TopologyAtom class method), 207

from\_dict() (openforcefield.topology.TopologyBond class method), 212

from\_dict() (openforcefield.topology.TopologyMolecule class method), 143

from\_dict() (openforcefield.topology.TopologyVirtualParticle class method), 174

from\_dict() (openforcefield.topology.TopologyVirtualSite class method), 219

- method), 219
- from\_dict() (openforcefield.topology.TrivalentLonePairVirtualSite class method), 201
- from\_dict() (openforcefield.topology.VirtualParticle class method), 169
- from\_dict() (openforcefield.topology.VirtualSite class method), 163
- from\_file() (openforcefield.topology.FrozenMolecule static method), 81
- from\_file() (openforcefield.topology.Molecule static method), 107
- from\_file() (openforcefield.utils.toolkits.AmberToolsToolkitWrapper method), 485
- from\_file() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 464
- from\_file() (openforcefield.utils.toolkits.RDKitToolkitWrapper method), 476
- from\_file() (openforcefield.utils.toolkits.ToolkitWrapper method), 460
- from\_file\_obj() (openforcefield.utils.toolkits.AmberToolsToolkitWrapper method), 485
- from\_file\_obj() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 464
- from\_file\_obj() (openforcefield.utils.toolkits.RDKitToolkitWrapper method), 476
- from\_file\_obj() (openforcefield.utils.toolkits.ToolkitWrapper method), 460
- from\_inchi() (openforcefield.topology.FrozenMolecule static method), 71
- from\_inchi() (openforcefield.topology.Molecule static method), 108
- from\_inchi() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 469
- from\_inchi() (openforcefield.utils.toolkits.RDKitToolkitWrapper method), 478
- from\_iupac() (openforcefield.topology.FrozenMolecule class method), 79
- from\_iupac() (openforcefield.topology.Molecule class method), 108
- from\_iupac() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 469
- from\_json() (openforcefield.topology.Atom class method), 153
- from\_json() (openforcefield.topology.Bond class method), 158
- from\_json() (openforcefield.topology.BondChargeVirtualSite class method), 181
- from\_json() (openforcefield.topology.DivalentLonePairVirtualSite class method), 195
- from\_json() (openforcefield.topology.FrozenMolecule class method), 88
- from\_json() (openforcefield.topology.Molecule class method), 109
- from\_json() (openforcefield.topology.MonovalentLonePairVirtualSite class method), 188
- from\_json() (openforcefield.topology.Particle class method), 146
- from\_json() (openforcefield.topology.Topology class method), 136
- from\_json() (openforcefield.topology.TopologyAtom class method), 207
- from\_json() (openforcefield.topology.TopologyBond class method), 213
- from\_json() (openforcefield.topology.TopologyVirtualParticle class method), 174
- from\_json() (openforcefield.topology.TopologyVirtualSite class method), 219
- from\_json() (openforcefield.topology.TrivalentLonePairVirtualSite class method), 201
- from\_json() (openforcefield.topology.VirtualParticle class method), 169
- from\_json() (openforcefield.topology.VirtualSite class method), 164
- from\_json() (openforcefield.utils.serialization.Serializable class method), 489
- from\_mapped\_smiles() (openforcefield.topology.FrozenMolecule class method), 85
- from\_mapped\_smiles() (openforcefield.topology.Molecule class method), 109
- from\_mdtraj() (openforcefield.topology.Topology static method), 133
- from\_messagepack() (openforcefield.topology.Atom class method), 153
- from\_messagepack() (openforcefield.topology.Bond class method), 158

`from_messagepack()` (*openforcefield.topology.BondChargeVirtualSite* class method), 181

`from_messagepack()` (*openforcefield.topology.DivalentLonePairVirtualSite* class method), 195

`from_messagepack()` (*openforcefield.topology.FrozenMolecule* class method), 88

`from_messagepack()` (*openforcefield.topology.Molecule* class method), 109

`from_messagepack()` (*openforcefield.topology.MonovalentLonePairVirtualSite* class method), 188

`from_messagepack()` (*openforcefield.topology.Particle* class method), 146

`from_messagepack()` (*openforcefield.topology.Topology* class method), 136

`from_messagepack()` (*openforcefield.topology.TopologyAtom* class method), 208

`from_messagepack()` (*openforcefield.topology.TopologyBond* class method), 213

`from_messagepack()` (*openforcefield.topology.TopologyVirtualParticle* class method), 174

`from_messagepack()` (*openforcefield.topology.TopologyVirtualSite* class method), 219

`from_messagepack()` (*openforcefield.topology.TrivalentLonePairVirtualSite* class method), 202

`from_messagepack()` (*openforcefield.topology.VirtualParticle* class method), 169

`from_messagepack()` (*openforcefield.topology.VirtualSite* class method), 164

`from_messagepack()` (*openforcefield.utils.serialization.Serializable* class method), 491

`from_molecules()` (*openforcefield.topology.Topology* class method), 130

`from_object()` (*openforcefield.utils.toolkits.OpenEyeToolkitWrapper* method), 463

`from_object()` (*openforcefield.utils.toolkits.RDKitToolkitWrapper* method), 475

`from_openeye()` (*openforcefield.topology.FrozenMolecule* static method), 84

`from_openeye()` (*openforcefield.topology.Molecule* static method), 110

`from_openeye()` (*openforcefield.utils.toolkits.OpenEyeToolkitWrapper* static method), 466

`from_openmm()` (*openforcefield.topology.Topology* class method), 133

`from_parmed()` (*openforcefield.topology.Topology* static method), 134

`from_pdb_and_smiles()` (*openforcefield.topology.FrozenMolecule* class method), 86

`from_pdb_and_smiles()` (*openforcefield.topology.Molecule* class method), 110

`from_pdb_and_smiles()` (*openforcefield.utils.toolkits.RDKitToolkitWrapper* method), 475

`from_pickle()` (*openforcefield.topology.Atom* class method), 153

`from_pickle()` (*openforcefield.topology.Bond* class method), 158

`from_pickle()` (*openforcefield.topology.BondChargeVirtualSite* class method), 182

`from_pickle()` (*openforcefield.topology.DivalentLonePairVirtualSite* class method), 195

`from_pickle()` (*openforcefield.topology.FrozenMolecule* class method), 88

`from_pickle()` (*openforcefield.topology.Molecule* class method), 110

`from_pickle()` (*openforcefield.topology.MonovalentLonePairVirtualSite* class method), 188

`from_pickle()` (*openforcefield.topology.Particle* class method), 147

`from_pickle()` (*openforcefield.topology.Topology* class method), 136

`from_pickle()` (*openforcefield.topology.TopologyAtom* class method), 208

`from_pickle()` (*openforcefield.topology.TopologyBond* class method), 213

`from_pickle()` (*openforcefield.topology.TopologyVirtualParticle* class method), 175

`from_pickle()` (*openforcefield.topology.TopologyVirtualSite* class method), 219

`from_pickle()` (*openforcefield.topology.TrivalentLonePairVirtualSite* class method), 202

`from_pickle()` (*openforcefield.topology.VirtualParticle* class method), 169  
`from_pickle()` (*openforcefield.topology.VirtualSite* class method), 164  
`from_pickle()` (*openforcefield.utils.serialization.Serializable* class method), 491  
`from_qcschema()` (*openforcefield.topology.FrozenMolecule* class method), 85  
`from_qcschema()` (*openforcefield.topology.Molecule* class method), 111  
`from_rdkit()` (*openforcefield.topology.FrozenMolecule* static method), 83  
`from_rdkit()` (*openforcefield.topology.Molecule* static method), 111  
`from_rdkit()` (*openforcefield.utils.toolkits.RDKitToolkitWrapper* method), 479  
`from_smiles()` (*openforcefield.topology.FrozenMolecule* static method), 72  
`from_smiles()` (*openforcefield.topology.Molecule* static method), 112  
`from_smiles()` (*openforcefield.utils.toolkits.OpenEyeToolkitWrapper* method), 468  
`from_smiles()` (*openforcefield.utils.toolkits.RDKitToolkitWrapper* method), 478  
`from_toml()` (*openforcefield.topology.Atom* class method), 154  
`from_toml()` (*openforcefield.topology.Bond* class method), 158  
`from_toml()` (*openforcefield.topology.BondChargeVirtualSite* class method), 182  
`from_toml()` (*openforcefield.topology.DivalentLonePairVirtualSite* class method), 195  
`from_toml()` (*openforcefield.topology.FrozenMolecule* class method), 88  
`from_toml()` (*openforcefield.topology.Molecule* class method), 112  
`from_toml()` (*openforcefield.topology.MonovalentLonePairVirtualSite* class method), 189  
`from_toml()` (*openforcefield.topology.Particle* class method), 147  
`from_toml()` (*openforcefield.topology.Topology* class method), 136  
`from_toml()` (*openforcefield.topology.TopologyAtom* class method), 208  
`from_toml()` (*openforcefield.topology.TopologyBond* class method), 213  
`from_toml()` (*openforcefield.topology.TopologyVirtualParticle* class method), 175  
`from_toml()` (*openforcefield.topology.TopologyVirtualSite* class method), 220  
`from_toml()` (*openforcefield.topology.TrivalentLonePairVirtualSite* class method), 202  
`from_toml()` (*openforcefield.topology.VirtualParticle* class method), 169  
`from_toml()` (*openforcefield.topology.VirtualSite* class method), 164  
`from_toml()` (*openforcefield.utils.serialization.Serializable* class method), 490  
`from_topology()` (*openforcefield.topology.FrozenMolecule* static method), 80  
`from_topology()` (*openforcefield.topology.Molecule* static method), 112  
`from_xml()` (*openforcefield.topology.Atom* class method), 154  
`from_xml()` (*openforcefield.topology.Bond* class method), 159  
`from_xml()` (*openforcefield.topology.BondChargeVirtualSite* class method), 182  
`from_xml()` (*openforcefield.topology.DivalentLonePairVirtualSite* class method), 196  
`from_xml()` (*openforcefield.topology.FrozenMolecule* class method), 88  
`from_xml()` (*openforcefield.topology.Molecule* class method), 113  
`from_xml()` (*openforcefield.topology.MonovalentLonePairVirtualSite* class method), 189  
`from_xml()` (*openforcefield.topology.Particle* class method), 147  
`from_xml()` (*openforcefield.topology.Topology* class method), 136  
`from_xml()` (*openforcefield.topology.TopologyAtom* class method), 208  
`from_xml()` (*openforcefield.topology.TopologyBond* class method), 213  
`from_xml()` (*openforcefield.topology.TopologyVirtualParticle* class method), 175  
`from_xml()` (*openforcefield.topology.TopologyVirtualSite* class method), 220



method), 220

from\_xml() (openforcefield.topology.TrivalentLonePairVirtualSite class method), 202

from\_xml() (openforcefield.topology.VirtualParticle class method), 169

from\_xml() (openforcefield.topology.VirtualSite class method), 165

from\_xml() (openforcefield.utils.serialization.Serializable class method), 491

from\_yaml() (openforcefield.topology.Atom class method), 154

from\_yaml() (openforcefield.topology.Bond class method), 159

from\_yaml() (openforcefield.topology.BondChargeVirtualSite class method), 182

from\_yaml() (openforcefield.topology.DivalentLonePairVirtualSite class method), 196

from\_yaml() (openforcefield.topology.FrozenMolecule class method), 89

from\_yaml() (openforcefield.topology.Molecule class method), 113

from\_yaml() (openforcefield.topology.MonovalentLonePairVirtualSite class method), 189

from\_yaml() (openforcefield.topology.Particle class method), 147

from\_yaml() (openforcefield.topology.Topology class method), 137

from\_yaml() (openforcefield.topology.TopologyAtom class method), 208

from\_yaml() (openforcefield.topology.TopologyBond class method), 214

from\_yaml() (openforcefield.topology.TopologyVirtualParticle class method), 175

from\_yaml() (openforcefield.topology.TopologyVirtualSite class method), 220

from\_yaml() (openforcefield.topology.TrivalentLonePairVirtualSite class method), 202

from\_yaml() (openforcefield.topology.VirtualParticle class method), 170

from\_yaml() (openforcefield.topology.VirtualSite class method), 165

from\_yaml() (openforcefield.utils.serialization.Serializable class method), 490

FrozenMolecule (class in openforcefield.topology), 61

## G

GBSAHandler (class in openforcefield.typing.engines.smirnoff.parameters), 414

GBSAHandler.GBSAType (class in openforcefield.typing.engines.smirnoff.parameters), 428

generate\_conformers() (openforcefield.topology.FrozenMolecule method), 74

generate\_conformers() (openforcefield.topology.Molecule method), 113

generate\_conformers() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper method), 469

generate\_conformers() (openforcefield.utils.toolkits.RDKitToolkitWrapper method), 478

generate\_unique\_atom\_names() (openforcefield.topology.FrozenMolecule method), 69

generate\_unique\_atom\_names() (openforcefield.topology.Molecule method), 114

get() (openforcefield.topology.ImproperDict method), 225

get() (openforcefield.topology.ValenceDict method), 223

get\_available\_force\_fields() (in module openforcefield.typing.engines.smirnoff.forcefield), 237

get\_bond\_between() (openforcefield.topology.FrozenMolecule method), 87

get\_bond\_between() (openforcefield.topology.Molecule method), 114

get\_bond\_between() (openforcefield.topology.Topology method), 134

get\_data\_file\_path() (in module openforcefield.utils.utils), 493

get\_molecule\_parameterIDs() (in module openforcefield.utils.utils), 494

get\_openmm\_virtual\_site() (openforcefield.topology.BondChargeVirtualSite method), 181

get\_openmm\_virtual\_site() (openforcefield.topology.DivalentLonePairVirtualSite method), 194

get\_openmm\_virtual\_site() (openforcefield.topology.MonovalentLonePairVirtualSite method), 188

get\_openmm\_virtual\_site() (openforcefield.topology.TrivalentLonePairVirtualSite method), 201

get\_parameter() (openforce-

`field.typing.engines.smirnoff.parameters.AngleHandler` (class in `openforcefield.topology.Molecule` property), 114  
`method`), 292  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.BondHandler`  
`method`), 274  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.ElectrostaticsHandler`  
`method`), 390  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.GBSAHandler`  
`method`), 439  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.ImproperTorsionHandler`  
`method`), 337  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.LibraryChargeHandler`  
`method`), 405  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.ParameterHandler`  
`method`), 250  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.ProperTorsionHandler`  
`method`), 316  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.ToolkitsIndex`  
`method`), 413  
`get_parameter()` (openforce-  
`field.typing.engines.smirnoff.parameters.vdWHandler`  
`method`), 370  
`get_parameter_handler()` (openforce-  
`field.typing.engines.smirnoff.forcefield.ForceField`  
`method`), 234  
`get_parameter_io_handler()` (openforce-  
`field.typing.engines.smirnoff.forcefield.ForceField`  
`method`), 234  
`get_tagged_smarts_connectivity()` (openforce-  
`field.utils.toolkits.OpenEyeToolkitWrapper`  
`method`), 471  
`get_tagged_smarts_connectivity()` (openforce-  
`field.utils.toolkits.RDKitToolkitWrapper`  
`method`), 480  
`get_type()` (openforce-  
`field.typing.chemistry.ChemicalEnvironment`  
`method`), 228  
**H**  
`has_unique_atom_names()` (openforce-  
`field.topology.FrozenMolecule` property), 69  
`has_unique_atom_names()` (openforce-  
`field.topology.Molecule` property), 114  
`hill_formula()` (openforce-  
`field.topology.FrozenMolecule` property), 79  
`improperdict` (class in `openforcefield.topology`), 224  
`impropers()` (openforcefield.topology.FrozenMolecule property), 78  
`impropers()` (openforcefield.topology.Molecule property), 114  
`impropers()` (openforcefield.topology.Topology property), 132  
`impropers()` (openforce-  
`field.topology.TopologyMolecule` property), 143  
`ImproperTorsionHandler` (class in `openforce-  
field.typing.engines.smirnoff.parameters`), 318  
`ImproperTorsionHandler.ImproperTorsionType` (class in `openforce-  
field.typing.engines.smirnoff.parameters`), 324  
`in_plane_angle()` (openforce-  
`field.topology.MonovalentLonePairVirtualSite` property), 188  
`index()` (openforcefield.typing.engines.smirnoff.parameters.ParameterList), 244  
`index_of()` (openforcefield.topology.ImproperDict static method), 225  
`index_of()` (openforcefield.topology.ValenceDict static method), 223  
`IndexedMappedParameterAttribute` (class in `openforce-  
field.typing.engines.smirnoff.parameters`), 450  
`IndexedMappedParameterAttribute.UNDEFINED` (class in `openforce-  
field.typing.engines.smirnoff.parameters`), 452  
`IndexedParameterAttribute` (class in `openforce-  
field.typing.engines.smirnoff.parameters`), 446  
`IndexedParameterAttribute.UNDEFINED` (class in `openforce-  
field.typing.engines.smirnoff.parameters`), 448  
`inherit_docstrings()` (in module `openforce-  
field.utils.utils`), 492  
`insert()` (openforcefield.typing.engines.smirnoff.parameters.ParameterList), 244  
`is_aromatic()` (openforcefield.topology.Atom property), 152  
`is_available()` (openforce-  
`field.utils.toolkits.AmberToolsToolkitWrapper` static method), 484

- is\_available() (openforcefield.utils.toolkits.OpenEyeToolkitWrapper static method), 463
- is\_available() (openforcefield.utils.toolkits.RDKitToolkitWrapper static method), 475
- is\_available() (openforcefield.utils.toolkits.ToolkitWrapper static method), 459
- is\_bonded() (openforcefield.topology.Topology method), 135
- is\_bonded\_to() (openforcefield.topology.Atom method), 153
- is\_constrained() (openforcefield.topology.Topology method), 138
- is\_in\_ring() (openforcefield.topology.Atom property), 153
- is\_in\_ring() (openforcefield.topology.Bond property), 158
- is\_isomorphic\_with() (openforcefield.topology.FrozenMolecule method), 74
- is\_isomorphic\_with() (openforcefield.topology.Molecule method), 114
- items() (openforcefield.topology.ImproperDict method), 225
- items() (openforcefield.topology.ValenceDict method), 223
- ## K
- key\_transform() (openforcefield.topology.ImproperDict static method), 225
- key\_transform() (openforcefield.topology.ValenceDict static method), 223
- keys() (openforcefield.topology.ImproperDict method), 225
- keys() (openforcefield.topology.ValenceDict method), 223
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.AngleHandler property), 292
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.BondHandler property), 274
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler property), 390
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.GBSAHandler property), 440
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler property), 337
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler property), 406
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.ParameterHandler property), 249
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler property), 317
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler property), 414
- known\_kwargs() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler property), 371
- ## L
- label\_molecules() (openforcefield.typing.engines.smirnoff.forcefield.ForceField method), 237
- LibraryChargeHandler (class in openforcefield.typing.engines.smirnoff.parameters), 391
- LibraryChargeHandler.LibraryChargeType (class in openforcefield.typing.engines.smirnoff.parameters), 394
- ## M
- MappedParameterAttribute (class in openforcefield.typing.engines.smirnoff.parameters), 448
- MappedParameterAttribute.UNDEFINED (class in openforcefield.typing.engines.smirnoff.parameters), 450
- mark\_charges\_assigned() (openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler method), 390
- mark\_charges\_assigned() (openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler method), 406
- mark\_charges\_assigned() (openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler method), 414
- mark\_charges\_assigned() (openforcefield.typing.engines.smirnoff.parameters.vdWHandler method), 371
- mass() (openforcefield.topology.Atom property), 152
- molecule (class in openforcefield.topology), 90
- molecule() (openforcefield.topology.Atom property), 154
- molecule() (openforcefield.topology.BondChargeVirtualSite property), 154



erty), 182

molecule() (openforcefield.topology.DivalentLonePairVirtualSite property), 196

molecule() (openforcefield.topology.MonovalentLonePairVirtualSite property), 189

molecule() (openforcefield.topology.Particle property), 146

molecule() (openforcefield.topology.TopologyAtom property), 207

molecule() (openforcefield.topology.TopologyBond property), 212

molecule() (openforcefield.topology.TopologyVirtualParticle property), 175

molecule() (openforcefield.topology.TopologyVirtualSite property), 218

molecule() (openforcefield.topology.TrivalentLonePairVirtualSite property), 203

molecule() (openforcefield.topology.VirtualParticle property), 170

molecule() (openforcefield.topology.VirtualSite property), 165

molecule\_atom\_index() (openforcefield.topology.Atom property), 153

molecule\_bond\_index() (openforcefield.topology.Bond property), 158

molecule\_particle\_index() (openforcefield.topology.Atom property), 153

molecule\_particle\_index() (openforcefield.topology.BondChargeVirtualSite property), 183

molecule\_particle\_index() (openforcefield.topology.DivalentLonePairVirtualSite property), 196

molecule\_particle\_index() (openforcefield.topology.MonovalentLonePairVirtualSite property), 189

molecule\_particle\_index() (openforcefield.topology.Particle property), 146

molecule\_particle\_index() (openforcefield.topology.TrivalentLonePairVirtualSite property), 203

molecule\_particle\_index() (openforcefield.topology.VirtualParticle property), 170

molecule\_particle\_index() (openforcefield.topology.VirtualSite property), 165

molecule\_virtual\_site\_index() (openforcefield.topology.BondChargeVirtualSite property), 183

molecule\_virtual\_site\_index() (openforcefield.topology.DivalentLonePairVirtualSite property), 196

molecule\_virtual\_site\_index() (openforcefield.topology.MonovalentLonePairVirtualSite property), 189

molecule\_virtual\_site\_index() (openforcefield.topology.TrivalentLonePairVirtualSite property), 203

molecule\_virtual\_site\_index() (openforcefield.topology.VirtualSite property), 163

MonovalentLonePairVirtualSite (class in openforcefield.topology), 184

## N

n\_angles() (openforcefield.topology.FrozenMolecule property), 78

n\_angles() (openforcefield.topology.Molecule property), 115

n\_angles() (openforcefield.topology.Topology property), 132

n\_angles() (openforcefield.topology.TopologyMolecule property), 143

n\_atoms() (openforcefield.topology.FrozenMolecule property), 77

n\_atoms() (openforcefield.topology.Molecule property), 115

n\_atoms() (openforcefield.topology.TopologyMolecule property), 141

n\_bonds() (openforcefield.topology.FrozenMolecule property), 78

n\_bonds() (openforcefield.topology.Molecule property), 115

n\_bonds() (openforcefield.topology.TopologyMolecule property), 142

n\_conformers() (openforcefield.topology.FrozenMolecule property), 78

n\_conformers() (openforcefield.topology.Molecule property), 115

n\_impropers() (openforcefield.topology.FrozenMolecule property), 78

n\_impropers() (openforcefield.topology.Molecule property), 115

n\_impropers() (openforcefield.topology.Topology property), 132

n\_impropers() (openforcefield.topology.TopologyMolecule property), 143

n\_particles() (openforcefield.topology.BondChargeVirtualSite property), 183

- `n_particles()` (*openforcefield.topology.DivalentLonePairVirtualSite property*), 196  
`n_particles()` (*openforcefield.topology.FrozenMolecule property*), 77  
`n_particles()` (*openforcefield.topology.Molecule property*), 115  
`n_particles()` (*openforcefield.topology.MonovalentLonePairVirtualSite property*), 189  
`n_particles()` (*openforcefield.topology.TopologyMolecule property*), 143  
`n_particles()` (*openforcefield.topology.TopologyVirtualParticle property*), 175  
`n_particles()` (*openforcefield.topology.TopologyVirtualSite property*), 218  
`n_particles()` (*openforcefield.topology.TrivalentLonePairVirtualSite property*), 203  
`n_particles()` (*openforcefield.topology.VirtualSite property*), 163  
`n_propers()` (*openforcefield.topology.FrozenMolecule property*), 78  
`n_propers()` (*openforcefield.topology.Molecule property*), 115  
`n_propers()` (*openforcefield.topology.Topology property*), 132  
`n_propers()` (*openforcefield.topology.TopologyMolecule property*), 143  
`n_reference_molecules()` (*openforcefield.topology.Topology property*), 131  
`n_rings()` (*openforcefield.topology.FrozenMolecule property*), 78  
`n_rings()` (*openforcefield.topology.Molecule property*), 115  
`n_topology_atoms()` (*openforcefield.topology.Topology property*), 131  
`n_topology_bonds()` (*openforcefield.topology.Topology property*), 131  
`n_topology_molecules()` (*openforcefield.topology.Topology property*), 131  
`n_topology_particles()` (*openforcefield.topology.Topology property*), 131  
`n_topology_virtual_sites()` (*openforcefield.topology.Topology property*), 132  
`n_virtual_particles()` (*openforcefield.topology.FrozenMolecule property*), 77  
`n_virtual_particles()` (*openforcefield.topology.Molecule property*), 115  
`n_virtual_sites()` (*openforcefield.topology.FrozenMolecule property*), 77  
`n_virtual_sites()` (*openforcefield.topology.Molecule property*), 115  
`n_virtual_sites()` (*openforcefield.topology.TopologyMolecule property*), 143  
`name()` (*openforcefield.topology.Atom property*), 152  
`name()` (*openforcefield.topology.BondChargeVirtualSite property*), 183  
`name()` (*openforcefield.topology.DivalentLonePairVirtualSite property*), 196  
`name()` (*openforcefield.topology.FrozenMolecule property*), 78  
`name()` (*openforcefield.topology.Molecule property*), 115  
`name()` (*openforcefield.topology.MonovalentLonePairVirtualSite property*), 190  
`name()` (*openforcefield.topology.Particle property*), 146  
`name()` (*openforcefield.topology.TrivalentLonePairVirtualSite property*), 203  
`name()` (*openforcefield.topology.VirtualParticle property*), 170  
`name()` (*openforcefield.topology.VirtualSite property*), 164
- ## O
- `OpenEyeToolkitWrapper` (class in *openforcefield.utils.toolkits*), 460  
`out_of_plane_angle()` (*openforcefield.topology.DivalentLonePairVirtualSite property*), 194  
`out_of_plane_angle()` (*openforcefield.topology.MonovalentLonePairVirtualSite property*), 188
- ## P
- `ParameterAttribute` (class in *openforcefield.typing.engines.smirnoff.parameters*), 444  
`ParameterAttribute.UNDEFINED` (class in *openforcefield.typing.engines.smirnoff.parameters*), 446  
`ParameterHandler` (class in *openforcefield.typing.engines.smirnoff.parameters*), 245  
`ParameterIOHandler` (class in *openforcefield.typing.engines.smirnoff.io*), 441  
`ParameterList` (class in *openforcefield.typing.engines.smirnoff.parameters*), 243

`parameters()` (openforcefield.topology.FrozenMolecule property),  
`field.typing.engines.smirnoff.parameters.AngleHandler` 77  
`property)`, 292 `partial_charges()` (openforcefield.topology.Molecule  
`property)`, 115  
`parameters()` (openforcefield.topology.Molecule (class in openforcefield.topology), 144  
`property)`, 274 `particle()` (openforcefield.topology.TopologyMolecule  
`method)`, 142  
`parameters()` (openforcefield.topology.VirtualParticle (class in openforcefield.topology), 142  
`property)`, 390 `field.topology.BondChargeVirtualSite` prop-  
`erty)`, 183  
`parameters()` (openforcefield.topology.VirtualSite (class in openforcefield.topology), 196  
`property)`, 440 `field.topology.DivalentLonePairVirtualSite`  
`property)`, 196  
`parameters()` (openforcefield.topology.FrozenMolecule (class in openforcefield.topology), 144  
`property)`, 337 `field.topology.FrozenMolecule` (class in openforcefield.topology), 144  
`property)`, 116  
`parameters()` (openforcefield.topology.Molecule (class in openforcefield.topology), 144  
`property)`, 406 `particles()` (openforcefield.topology.Molecule prop-  
`erty)`, 190  
`parameters()` (openforcefield.topology.MonovalentLonePairVirtualSite (class in openforcefield.topology), 190  
`property)`, 249 `particles()` (openforcefield.topology.TopologyMolecule  
`property)`, 317  
`parameters()` (openforcefield.topology.TopologyVirtualParticle (class in openforcefield.topology), 144  
`property)`, 414 `field.topology.TopologyVirtualParticle` prop-  
`erty)`, 218  
`parameters()` (openforcefield.topology.VirtualSite (class in openforcefield.topology), 196  
`property)`, 371 `particles()` (openforcefield.topology.VirtualSite  
`property)`, 203  
`ParameterType` (class in openforcefield.topology.VirtualSite (class in openforcefield.topology), 196  
`field.typing.engines.smirnoff.parameters)`, 238 `particles()` (openforcefield.topology.VirtualSite  
`property)`, 163  
`parse_file()` (openforcefield.topology.ImproperDict (class in openforcefield.topology), 144  
`field.typing.engines.smirnoff.io.ParameterIOHandler` (class in openforcefield.io.smirnoff, 225  
`method)`, 441  
`parse_file()` (openforcefield.topology.ValenceDict (class in openforcefield.topology), 144  
`field.typing.engines.smirnoff.io.XMLParameterIOHandler` (class in openforcefield.io.smirnoff, 225  
`method)`, 442 `pop()` (openforcefield.topology.ValenceDict  
`method)`, 245  
`parse_smirnoff_from_source()` (openforcefield.topology.ImproperDict (class in openforcefield.topology), 144  
`field.typing.engines.smirnoff.forcefield.ForceField` (class in openforcefield.forcefield, 225  
`method)`, 235 `popitem()` (openforcefield.topology.ImproperDict  
`method)`, 225  
`parse_sources()` (openforcefield.topology.ValenceDict (class in openforcefield.topology), 144  
`field.typing.engines.smirnoff.forcefield.ForceField` (class in openforcefield.forcefield, 225  
`method)`, 235 `postprocess_system()` (openforcefield.typing.engines.smirnoff.parameters.AngleHandler  
`method)`, 292  
`parse_string()` (openforcefield.typing.engines.smirnoff.io.ParameterIOHandler (class in openforcefield.io.smirnoff, 225  
`method)`, 441 `postprocess_system()` (openforcefield.typing.engines.smirnoff.parameters.BondHandler  
`method)`, 274  
`parse_string()` (openforcefield.typing.engines.smirnoff.io.XMLParameterIOHandler (class in openforcefield.io.smirnoff, 225  
`method)`, 443 `postprocess_system()` (openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler  
`method)`, 387  
`partial_charge()` (openforcefield.topology.Atom (class in openforcefield.topology), 144  
`property)`, 152  
`partial_charges()` (openforcefield.topology.Molecule (class in openforcefield.topology), 144  
`property)`, 115

[field.typing.engines.smirnoff.parameters.GBSAHandler](#) [method](#)), 233  
[method](#)), 440  
[register\\_toolkit\(\)](#) ([openforce-](#)  
[field.typing.engines.smirnoff.parameters.ImproperTorsionHandler](#)  
[method](#)), 337  
[registered\\_parameter\\_handlers\(\)](#) ([openforce-](#)  
[field.typing.engines.smirnoff.parameters.LibraryChargeHandler](#)  
[method](#)), 234  
[registered\\_toolkit\\_versions\(\)](#) ([openforce-](#)  
[field.typing.engines.smirnoff.parameters.ParameterHandler](#)  
[method](#)), 251  
[registered\\_toolkits\(\)](#) ([openforce-](#)  
[field.typing.engines.smirnoff.parameters.ProperTorsionHandler](#)  
[method](#)), 317  
[remap\(\)](#) ([openforcefield.topology.FrozenMolecule](#)  
[method](#)), 87  
[AM1BCCHandler](#) ([openforcefield.topology.Molecule](#) [method](#)),  
[method](#)), 411  
[remove\(\)](#) ([openforcefield.typing.engines.smirnoff.parameters.Parameter](#)  
[field.typing.engines.smirnoff.parameters.vdWHandler](#) [method](#)), 245  
[method](#)), 367  
[resolve\(\)](#) ([openforcefield.utils.toolkits.ToolkitRegistry](#)  
[method](#)), 456  
[reverse\(\)](#) ([openforce-](#)  
[field.typing.engines.smirnoff.parameters.ParameterList](#)  
[method](#)), 245  
[rings\(\)](#) ([openforcefield.topology.FrozenMolecule](#)  
[property](#)), 78  
[rings\(\)](#) ([openforcefield.topology.Molecule](#) [prop-](#)  
[erty](#)), 116  
[rings\(\)](#) ([openforcefield.topology.Topology](#) [prop-](#)  
[erty](#)), 132  
[rings\(\)](#) ([openforcefield.topology.TopologyMolecule](#) [prop-](#)  
[erty](#)), 143  
[properties\(\)](#) ([openforce-](#)  
[field.topology.FrozenMolecule](#) [property](#)),  
79  
[properties\(\)](#) ([openforcefield.topology.Molecule](#) [prop-](#)  
[erty](#)), 116  
[ProperTorsionHandler](#) ([class](#) [in](#) [openforce-](#)  
[field.typing.engines.smirnoff.parameters](#)),  
293  
[ProperTorsionHandler.ProperTorsionType](#)  
([class](#) [in](#) [openforce-](#)  
[field.typing.engines.smirnoff.parameters](#)),  
303

## R

[RDKitToolkitWrapper](#) ([class](#) [in](#) [openforce-](#)  
[field.utils.toolkits](#)), 473  
[reference\\_molecule\(\)](#) ([openforce-](#)  
[field.topology.TopologyMolecule](#) [property](#)),  
141  
[reference\\_molecules\(\)](#) ([openforce-](#)  
[field.topology.Topology](#) [property](#)), 130  
[register\\_parameter\\_handler\(\)](#) ([openforce-](#)  
[field.typing.engines.smirnoff.forcefield.ForceField](#)  
[method](#)), 233  
[register\\_parameter\\_io\\_handler\(\)](#) ([openforce-](#)  
[field.typing.engines.smirnoff.forcefield.ForceField](#)

## S

[Serializable](#) ([class](#) [in](#) [openforce-](#)  
[field.utils.serialization](#)), 487  
[setdefault\(\)](#) ([openforcefield.topology.ImproperDict](#)  
[method](#)), 225  
[setdefault\(\)](#) ([openforcefield.topology.ValenceDict](#)  
[method](#)), 223  
[sigma\(\)](#) ([openforcefield.topology.BondChargeVirtualSite](#)  
[property](#)), 183  
[sigma\(\)](#) ([openforcefield.topology.DivalentLonePairVirtualSite](#)  
[property](#)), 196



`sigma()` (`openforcefield.topology.MonovalentLonePairVirtualSite` property), 190  
`sigma()` (`openforcefield.topology.TrivalentLonePairVirtualSite` property), 203  
`sigma()` (`openforcefield.topology.VirtualSite` property), 163  
`sort()` (`openforcefield.typing.engines.smirnoff.parameters.LonePairSorter` method), 245  
`stereochemistry()` (`openforcefield.topology.Atom` property), 152  
`strip_atom_stereochemistry()` (`openforcefield.topology.FrozenMolecule` method), 69  
`strip_atom_stereochemistry()` (`openforcefield.topology.Molecule` method), 116  
**T**  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.AngleHandler` property), 290  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.BondHandler` property), 272  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler` property), 387  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.GBSAHandler` property), 437  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler` property), 335  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler` property), 403  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.ParameterHandler` property), 249  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler` property), 314  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler` property), 411  
`TAGNAME()` (`openforcefield.typing.engines.smirnoff.parameters.vdWHandler` property), 368  
`temporary_cd()` (in module `openforcefield.utils.utils`), 493  
`to_bson()` (`openforcefield.topology.Atom` method), 154  
`to_bson()` (`openforcefield.topology.Bond` method), 159  
`to_bson()` (`openforcefield.topology.BondChargeVirtualSite` method), 183  
`to_bson()` (`openforcefield.topology.DivalentLonePairVirtualSite` method), 196  
`to_bson()` (`openforcefield.topology.FrozenMolecule` method), 89  
`to_bson()` (`openforcefield.topology.Molecule` method), 116  
`to_bson()` (`openforcefield.topology.MonovalentLonePairVirtualSite` method), 190  
`to_bson()` (`openforcefield.topology.Particle` method), 147  
`to_bson()` (`openforcefield.topology.Topology` method), 137  
`to_bson()` (`openforcefield.topology.TopologyAtom` method), 209  
`to_bson()` (`openforcefield.topology.TopologyBond` method), 214  
`to_bson()` (`openforcefield.topology.TopologyVirtualParticle` method), 176  
`to_bson()` (`openforcefield.topology.TopologyVirtualSite` method), 220  
`to_bson()` (`openforcefield.topology.TrivalentLonePairVirtualSite` method), 203  
`to_bson()` (`openforcefield.topology.VirtualParticle` method), 170  
`to_bson()` (`openforcefield.topology.VirtualSite` method), 165  
`to_bson()` (`openforcefield.utils.serialization.Serializable` method), 489  
`to_dict()` (`openforcefield.topology.Atom` method), 152  
`to_dict()` (`openforcefield.topology.Bond` method), 157  
`to_dict()` (`openforcefield.topology.BondChargeVirtualSite` method), 181  
`to_dict()` (`openforcefield.topology.DivalentLonePairVirtualSite` method), 194  
`to_dict()` (`openforcefield.topology.FrozenMolecule` method), 70  
`to_dict()` (`openforcefield.topology.Molecule` method), 117  
`to_dict()` (`openforcefield.topology.MonovalentLonePairVirtualSite` method), 187

`to_dict()` (*openforcefield.topology.Particle* method), 146  
`to_dict()` (*openforcefield.topology.Topology* method), 132  
`to_dict()` (*openforcefield.topology.TopologyAtom* method), 207  
`to_dict()` (*openforcefield.topology.TopologyBond* method), 212  
`to_dict()` (*openforcefield.topology.TopologyMolecule* method), 143  
`to_dict()` (*openforcefield.topology.TopologyVirtualParticle* method), 176  
`to_dict()` (*openforcefield.topology.TopologyVirtualSite* method), 219  
`to_dict()` (*openforcefield.topology.TrivalentLonePairVirtualSite* method), 201  
`to_dict()` (*openforcefield.topology.VirtualParticle* method), 170  
`to_dict()` (*openforcefield.topology.VirtualSite* method), 163  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.AngleHandler* method), 293  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.AngleHandlerType* method), 289  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.BondHandler* method), 275  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.BondHandlerType* method), 271  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.ElectrostaticsHandler* method), 390  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.GBSAHandler* method), 440  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.GBSAHandlerType* method), 437  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandler* method), 337  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.ImproperTorsionHandlerType* method), 334  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandler* method), 406  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.LibraryChargeHandlerType* method), 403  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.ParameterHandler* method), 251  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.ParameterType* method), 242  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandler* method), 317  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.ProperTorsionHandlerType* method), 314  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.ToolkitAM1BCCHandler* method), 414  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.vdWHandler* method), 371  
`to_dict()` (*openforcefield.typing.engines.smirnoff.parameters.vdWHandler.vdWType* method), 367  
`to_file()` (*openforcefield.topology.FrozenMolecule* method), 82  
`to_file()` (*openforcefield.topology.Molecule* method), 117  
`to_file()` (*openforcefield.topology.Topology* method), 133  
`to_file()` (*openforcefield.typing.engines.smirnoff.forcefield.ForceField* method), 236  
`to_file()` (*openforcefield.typing.engines.smirnoff.io.ParameterIOHandler* method), 442  
`to_file()` (*openforcefield.typing.engines.smirnoff.io.XMLParameterIOHandler* method), 443  
`to_file()` (*openforcefield.utils.toolkits.OpenEyeToolkitWrapper* method), 465  
`to_file()` (*openforcefield.utils.toolkits.RDKitToolkitWrapper* method), 477  
`to_file_obj()` (*openforcefield.utils.toolkits.OpenEyeToolkitWrapper* method), 464  
`to_file_obj()` (*openforcefield.utils.toolkits.RDKitToolkitWrapper* method), 476  
`to_hill_formula()` (*openforcefield.topology.FrozenMolecule* static method), 79  
`to_hill_formula()` (*openforcefield.topology.Molecule*

- static method*), 117
- `to_inchi()` (*openforcefield.topology.FrozenMolecule method*), 71
- `to_inchi()` (*openforcefield.topology.Molecule method*), 117
- `to_inchi()` (*openforcefield.utils.toolkits.OpenEyeToolkitWrapper method*), 467
- `to_inchi()` (*openforcefield.utils.toolkits.RDKitToolkitWrapper method*), 480
- `to_inchikey()` (*openforcefield.topology.FrozenMolecule method*), 71
- `to_inchikey()` (*openforcefield.topology.Molecule method*), 118
- `to_inchikey()` (*openforcefield.utils.toolkits.OpenEyeToolkitWrapper method*), 468
- `to_inchikey()` (*openforcefield.utils.toolkits.RDKitToolkitWrapper method*), 480
- `to_iupac()` (*openforcefield.topology.FrozenMolecule method*), 80
- `to_iupac()` (*openforcefield.topology.Molecule method*), 118
- `to_iupac()` (*openforcefield.utils.toolkits.OpenEyeToolkitWrapper method*), 468
- `to_json()` (*openforcefield.topology.Atom method*), 154
- `to_json()` (*openforcefield.topology.Bond method*), 159
- `to_json()` (*openforcefield.topology.BondChargeVirtualSite method*), 183
- `to_json()` (*openforcefield.topology.DivalentLonePairVirtualSite method*), 197
- `to_json()` (*openforcefield.topology.FrozenMolecule method*), 89
- `to_json()` (*openforcefield.topology.Molecule method*), 119
- `to_json()` (*openforcefield.topology.MonovalentLonePairVirtualSite method*), 190
- `to_json()` (*openforcefield.topology.Particle method*), 148
- `to_json()` (*openforcefield.topology.Topology method*), 137
- `to_json()` (*openforcefield.topology.TopologyAtom method*), 209
- `to_json()` (*openforcefield.topology.TopologyBond method*), 214
- `to_json()` (*openforcefield.topology.TopologyVirtualParticle method*), 176
- `to_json()` (*openforcefield.topology.TopologyVirtualSite method*), 220
- `to_json()` (*openforcefield.topology.TrivalentLonePairVirtualSite method*), 203
- `to_json()` (*openforcefield.topology.VirtualParticle method*), 170
- `to_json()` (*openforcefield.topology.VirtualSite method*), 165
- `to_json()` (*openforcefield.utils.serialization.Serializable method*), 489
- `to_list()` (*openforcefield.typing.engines.smirnoff.parameters.ParameterList method*), 244
- `to_messagepack()` (*openforcefield.topology.Atom method*), 155
- `to_messagepack()` (*openforcefield.topology.Bond method*), 159
- `to_messagepack()` (*openforcefield.topology.BondChargeVirtualSite method*), 183
- `to_messagepack()` (*openforcefield.topology.DivalentLonePairVirtualSite method*), 197
- `to_messagepack()` (*openforcefield.topology.FrozenMolecule method*), 89
- `to_messagepack()` (*openforcefield.topology.Molecule method*), 119
- `to_messagepack()` (*openforcefield.topology.MonovalentLonePairVirtualSite method*), 190
- `to_messagepack()` (*openforcefield.topology.Particle method*), 148
- `to_messagepack()` (*openforcefield.topology.Topology method*), 137
- `to_messagepack()` (*openforcefield.topology.TopologyAtom method*), 209
- `to_messagepack()` (*openforcefield.topology.TopologyBond method*), 214
- `to_messagepack()` (*openforcefield.topology.TopologyVirtualParticle method*), 176
- `to_messagepack()` (*openforcefield.topology.TopologyVirtualSite method*), 220
- `to_messagepack()` (*openforce-*

*field.topology.TrivalentLonePairVirtualSite*  
 method), 203  
 to\_messagepack() (openforce-  
*field.topology.VirtualParticle*  
 method), 170  
 to\_messagepack() (openforce-  
*field.topology.VirtualSite* method), 165  
 to\_messagepack() (openforce-  
*field.utils.serialization.Serializable* method), 490  
 to\_networkx() (openforce-  
*field.topology.FrozenMolecule*  
 method), 77  
 to\_networkx() (openforcefield.topology.Molecule  
 method), 119  
 to\_openeye() (openforce-  
*field.topology.FrozenMolecule*  
 method), 87  
 to\_openeye() (openforcefield.topology.Molecule  
 method), 119  
 to\_openeye() (openforce-  
*field.utils.toolkits.OpenEyeToolkitWrapper*  
 static method), 466  
 to\_openmm() (openforcefield.topology.Topology  
 method), 133  
 to\_parmed() (openforcefield.topology.Topology  
 method), 134  
 to\_pickle() (openforcefield.topology.Atom method), 155  
 to\_pickle() (openforcefield.topology.Bond method), 160  
 to\_pickle() (openforce-  
*field.topology.BondChargeVirtualSite*  
 method), 183  
 to\_pickle() (openforce-  
*field.topology.DivalentLonePairVirtualSite*  
 method), 197  
 to\_pickle() (openforcefield.topology.FrozenMolecule  
 method), 89  
 to\_pickle() (openforcefield.topology.Molecule  
 method), 120  
 to\_pickle() (openforce-  
*field.topology.MonovalentLonePairVirtualSite*  
 method), 190  
 to\_pickle() (openforcefield.topology.Particle  
 method), 148  
 to\_pickle() (openforcefield.topology.Topology  
 method), 137  
 to\_pickle() (openforcefield.topology.TopologyAtom  
 method), 209  
 to\_pickle() (openforcefield.topology.TopologyBond  
 method), 214  
 to\_pickle() (openforce-  
*field.topology.TopologyVirtualParticle*  
 method), 176  
 to\_pickle() (openforce-  
*field.topology.TopologyVirtualSite*  
 method), 221  
 to\_pickle() (openforce-  
*field.topology.TrivalentLonePairVirtualSite*  
 method), 203  
 to\_pickle() (openforcefield.topology.VirtualParticle  
 method), 171  
 to\_pickle() (openforcefield.topology.VirtualSite  
 method), 166  
 to\_pickle() (openforce-  
*field.utils.serialization.Serializable* method), 491  
 to\_qcschema() (openforce-  
*field.topology.FrozenMolecule*  
 method), 84  
 to\_qcschema() (openforcefield.topology.Molecule  
 method), 120  
 to\_rdkit() (openforcefield.topology.FrozenMolecule  
 method), 83  
 to\_rdkit() (openforcefield.topology.Molecule  
 method), 120  
 to\_rdkit() (openforce-  
*field.utils.toolkits.RDKitToolkitWrapper*  
 class method), 479  
 to\_smiles() (openforcefield.topology.FrozenMolecule  
 method), 70  
 to\_smiles() (openforcefield.topology.Molecule  
 method), 121  
 to\_smiles() (openforce-  
*field.utils.toolkits.OpenEyeToolkitWrapper*  
 method), 467  
 to\_smiles() (openforce-  
*field.utils.toolkits.RDKitToolkitWrapper*  
 method), 478  
 to\_string() (openforce-  
*field.typing.engines.smirnoff.forcefield.ForceField*  
 method), 235  
 to\_string() (openforce-  
*field.typing.engines.smirnoff.io.ParameterIOHandler*  
 method), 442  
 to\_string() (openforce-  
*field.typing.engines.smirnoff.io.XMLParameterIOHandler*  
 method), 443  
 to\_toml() (openforcefield.topology.Atom method), 155  
 to\_toml() (openforcefield.topology.Bond method), 160  
 to\_toml() (openforce-  
*field.topology.BondChargeVirtualSite*  
 method), 184  
 to\_toml() (openforce-  
*field.topology.DivalentLonePairVirtualSite*



method), 197

to\_toml() (openforcefield.topology.FrozenMolecule method), 90

to\_toml() (openforcefield.topology.Molecule method), 121

to\_toml() (openforcefield.topology.MonovalentLonePairVirtualSite method), 190

to\_toml() (openforcefield.topology.Particle method), 148

to\_toml() (openforcefield.topology.Topology method), 137

to\_toml() (openforcefield.topology.TopologyAtom method), 209

to\_toml() (openforcefield.topology.TopologyBond method), 215

to\_toml() (openforcefield.topology.TopologyVirtualParticle method), 176

to\_toml() (openforcefield.topology.TopologyVirtualSite method), 221

to\_toml() (openforcefield.topology.TrivalentLonePairVirtualSite method), 204

to\_toml() (openforcefield.topology.VirtualParticle method), 171

to\_toml() (openforcefield.topology.VirtualSite method), 166

to\_toml() (openforcefield.utils.serialization.Serializable method), 490

to\_topology() (openforcefield.topology.FrozenMolecule method), 81

to\_topology() (openforcefield.topology.Molecule method), 121

to\_xml() (openforcefield.topology.Atom method), 155

to\_xml() (openforcefield.topology.Bond method), 160

to\_xml() (openforcefield.topology.BondChargeVirtualSite method), 184

to\_xml() (openforcefield.topology.DivalentLonePairVirtualSite method), 197

to\_xml() (openforcefield.topology.FrozenMolecule method), 90

to\_xml() (openforcefield.topology.Molecule method), 122

to\_xml() (openforcefield.topology.MonovalentLonePairVirtualSite method), 191

to\_xml() (openforcefield.topology.Particle method), 148

to\_xml() (openforcefield.topology.Topology method), 138

to\_xml() (openforcefield.topology.TopologyAtom method), 210

to\_xml() (openforcefield.topology.TopologyBond method), 215

to\_xml() (openforcefield.topology.TopologyVirtualParticle method), 177

to\_xml() (openforcefield.topology.TopologyVirtualSite method), 221

to\_xml() (openforcefield.topology.TrivalentLonePairVirtualSite method), 204

to\_xml() (openforcefield.topology.VirtualParticle method), 171

to\_xml() (openforcefield.topology.VirtualSite method), 166

to\_yaml() (openforcefield.topology.Atom method), 155

to\_yaml() (openforcefield.topology.Bond method), 160

to\_yaml() (openforcefield.topology.BondChargeVirtualSite method), 184

to\_yaml() (openforcefield.topology.DivalentLonePairVirtualSite method), 197

to\_yaml() (openforcefield.topology.FrozenMolecule method), 90

to\_yaml() (openforcefield.topology.Molecule method), 122

to\_yaml() (openforcefield.topology.MonovalentLonePairVirtualSite method), 191

to\_yaml() (openforcefield.topology.Particle method), 148

to\_yaml() (openforcefield.topology.Topology method), 138

to\_yaml() (openforcefield.topology.TopologyAtom method), 210

to\_yaml() (openforcefield.topology.TopologyBond method), 215

to\_yaml() (openforcefield.topology.TopologyVirtualParticle method), 177

to\_yaml() (openforcefield.topology.TopologyVirtualSite method), 221

to\_yaml() (openforcefield.topology.TrivalentLonePairVirtualSite method), 204

to\_yaml() (openforcefield.topology.VirtualParticle method), 171

to\_yaml() (openforcefield.topology.VirtualSite method), 166

to\_yaml() (openforce-

[field.utils.serialization.Serializable](#) method), 490

`toolkit_file_read_formats()` (`openforcefield.utils.toolkits.AmberToolsToolkitWrapper` property), 486

`toolkit_file_read_formats()` (`openforcefield.utils.toolkits.OpenEyeToolkitWrapper` property), 472

`toolkit_file_read_formats()` (`openforcefield.utils.toolkits.RDKitToolkitWrapper` property), 481

`toolkit_file_read_formats()` (`openforcefield.utils.toolkits.ToolkitWrapper` property), 459

`toolkit_file_write_formats()` (`openforcefield.utils.toolkits.AmberToolsToolkitWrapper` property), 486

`toolkit_file_write_formats()` (`openforcefield.utils.toolkits.OpenEyeToolkitWrapper` property), 472

`toolkit_file_write_formats()` (`openforcefield.utils.toolkits.RDKitToolkitWrapper` property), 475

`toolkit_file_write_formats()` (`openforcefield.utils.toolkits.ToolkitWrapper` property), 459

`toolkit_installation_instructions()` (`openforcefield.utils.toolkits.AmberToolsToolkitWrapper` property), 486

`toolkit_installation_instructions()` (`openforcefield.utils.toolkits.OpenEyeToolkitWrapper` property), 472

`toolkit_installation_instructions()` (`openforcefield.utils.toolkits.RDKitToolkitWrapper` property), 481

`toolkit_installation_instructions()` (`openforcefield.utils.toolkits.ToolkitWrapper` property), 459

`toolkit_name()` (`openforcefield.utils.toolkits.AmberToolsToolkitWrapper` property), 486

`toolkit_name()` (`openforcefield.utils.toolkits.OpenEyeToolkitWrapper` property), 472

`toolkit_name()` (`openforcefield.utils.toolkits.RDKitToolkitWrapper` property), 482

`toolkit_name()` (`openforcefield.utils.toolkits.ToolkitWrapper` property), 459

`toolkit_version()` (`openforcefield.utils.toolkits.AmberToolsToolkitWrapper` property), 486

`toolkit_version()` (`openforcefield.utils.toolkits.OpenEyeToolkitWrapper` property), 472

`toolkit_version()` (`openforcefield.utils.toolkits.RDKitToolkitWrapper` property), 482

`toolkit_version()` (`openforcefield.utils.toolkits.ToolkitWrapper` property), 459

`ToolkitAM1BCCHandler` (class in `openforcefield.typing.engines.smirnoff.parameters`), 407

`ToolkitRegistry` (class in `openforcefield.utils.toolkits`), 453

`ToolkitWrapper` (class in `openforcefield.utils.toolkits`), 458

`Topology` (class in `openforcefield.topology`), 123

`topology()` (`openforcefield.topology.TopologyMolecule` property), 141

`topology_atom_index()` (`openforcefield.topology.TopologyAtom` property), 207

`topology_atoms()` (`openforcefield.topology.Topology` property), 131

`topology_bond_index()` (`openforcefield.topology.TopologyBond` property), 212

`topology_bonds()` (`openforcefield.topology.Topology` property), 131

`topology_bonds()` (`openforcefield.topology.TopologyAtom` property), 207

`topology_molecule()` (`openforcefield.topology.TopologyAtom` property), 207

`topology_molecule()` (`openforcefield.topology.TopologyBond` property), 212

`topology_molecule()` (`openforcefield.topology.TopologyVirtualParticle` property), 177

`topology_molecule()` (`openforcefield.topology.TopologyVirtualSite` property), 218

`topology_molecules()` (`openforcefield.topology.Topology` property), 131

`topology_particle_index()` (`openforcefield.topology.TopologyAtom` property), 207

`topology_particle_index()` (`openforcefield.topology.TopologyVirtualParticle` property), 174

`topology_particles()` (`openforcefield.topology.Topology` property), 131

`topology_virtual_particle_start_index()` (`open-`

[forcefield.topology.TopologyVirtualParticle property](#)), 177  
[topology\\_virtual\\_particle\\_start\\_index\(\)](#) ([openforcefield.topology.TopologyVirtualSite property](#)), 218  
[topology\\_virtual\\_site\\_index\(\)](#) ([openforcefield.topology.TopologyVirtualParticle property](#)), 177  
[topology\\_virtual\\_site\\_index\(\)](#) ([openforcefield.topology.TopologyVirtualSite property](#)), 218  
[topology\\_virtual\\_sites\(\)](#) ([openforcefield.topology.Topology property](#)), 132  
[TopologyAtom](#) (class in [openforcefield.topology](#)), 204  
[TopologyBond](#) (class in [openforcefield.topology](#)), 210  
[TopologyMolecule](#) (class in [openforcefield.topology](#)), 139  
[TopologyVirtualParticle](#) (class in [openforcefield.topology](#)), 171  
[TopologyVirtualSite](#) (class in [openforcefield.topology](#)), 215  
[torsions\(\)](#) ([openforcefield.topology.FrozenMolecule property](#)), 78  
[torsions\(\)](#) ([openforcefield.topology.Molecule property](#)), 122  
[total\\_charge\(\)](#) ([openforcefield.topology.FrozenMolecule property](#)), 78  
[total\\_charge\(\)](#) ([openforcefield.topology.Molecule property](#)), 122  
[TrivalentLonePairVirtualSite](#) (class in [openforcefield.topology](#)), 198  
[type\(\)](#) ([openforcefield.topology.BondChargeVirtualSite property](#)), 184  
[type\(\)](#) ([openforcefield.topology.DivalentLonePairVirtualSite property](#)), 198  
[type\(\)](#) ([openforcefield.topology.MonovalentLonePairVirtualSite property](#)), 191  
[type\(\)](#) ([openforcefield.topology.TopologyVirtualParticle property](#)), 177  
[type\(\)](#) ([openforcefield.topology.TopologyVirtualSite property](#)), 219  
[type\(\)](#) ([openforcefield.topology.TrivalentLonePairVirtualSite property](#)), 204  
[type\(\)](#) ([openforcefield.topology.VirtualSite property](#)), 164

## U

[update\(\)](#) ([openforcefield.topology.ImproperDict method](#)), 225  
[update\(\)](#) ([openforcefield.topology.ValenceDict method](#)), 223

## V

[ValenceDict](#) (class in [openforcefield.topology](#)), 222  
[validate\(\)](#) ([openforcefield.typing.chemistry.ChemicalEnvironment method](#)), 227  
[validate\\_smirks\(\)](#) ([openforcefield.typing.chemistry.ChemicalEnvironment class method](#)), 227  
[values\(\)](#) ([openforcefield.topology.ImproperDict method](#)), 225  
[values\(\)](#) ([openforcefield.topology.ValenceDict method](#)), 223  
[vdWHandler](#) (class in [openforcefield.typing.engines.smirnoff.parameters](#)), 338  
[vdWHandler.vdWType](#) (class in [openforcefield.typing.engines.smirnoff.parameters](#)), 356  
[virtual\\_particle\\_start\\_topology\\_index\(\)](#) ([openforcefield.topology.TopologyMolecule property](#)), 142  
[virtual\\_site\(\)](#) ([openforcefield.topology.Topology method](#)), 135  
[virtual\\_site\(\)](#) ([openforcefield.topology.TopologyMolecule method](#)), 143  
[virtual\\_site\(\)](#) ([openforcefield.topology.TopologyVirtualParticle property](#)), 177  
[virtual\\_site\(\)](#) ([openforcefield.topology.TopologyVirtualSite property](#)), 218  
[virtual\\_site\\_particle\\_index\(\)](#) ([openforcefield.topology.VirtualParticle property](#)), 168  
[virtual\\_site\\_start\\_topology\\_index\(\)](#) ([openforcefield.topology.TopologyMolecule property](#)), 143  
[virtual\\_sites\(\)](#) ([openforcefield.topology.Atom property](#)), 153  
[virtual\\_sites\(\)](#) ([openforcefield.topology.FrozenMolecule property](#)), 78  
[virtual\\_sites\(\)](#) ([openforcefield.topology.Molecule property](#)), 122  
[virtual\\_sites\(\)](#) ([openforcefield.topology.TopologyMolecule property](#)), 143  
[VirtualParticle](#) (class in [openforcefield.topology](#)), 167  
[VirtualSite](#) (class in [openforcefield.topology](#)), 160  
[visualize\(\)](#) ([openforcefield.topology.Molecule method](#)), 122

## X

XMLParameterIOHandler (class in *openforcefield.typing.engines.smirnoff.io*), [442](#)